



(19) **United States**

(12) **Patent Application Publication**
Kimoto et al.

(10) **Pub. No.: US 2011/0234647 A1**

(43) **Pub. Date: Sep. 29, 2011**

(54) **IMAGE DISPLAY DEVICE**

Publication Classification

(75) Inventors: **Takayuki Kimoto**, Osaka (JP);
Takaaki Gyoten, Hyogo (JP);
Yoshimasa Fushimi, Osaka (JP)

(51) **Int. Cl.**
G09G 5/10 (2006.01)

(52) **U.S. Cl.** **345/690**

(57) **ABSTRACT**

(73) Assignee: **PANASONIC CORPORATION**,
Osaka (JP)

An image display device includes a plurality solid-state light sources, a modulator configured to modulate light from a plurality of solid-state light sources, and an image display device configured to generate from a frame of image data, a plurality of subframes each further divided into subfields, and to display the plurality of subframes. The modulator turns off light output from all the solid-state light sources for the duration of one or more of the plurality of subframes, whereby it is possible to reduce motion blur arising from a hold-type display device, in which after-images remain on the retina of a person's eyes when viewing moving objects.

(21) Appl. No.: **13/037,382**

(22) Filed: **Mar. 1, 2011**

(30) **Foreign Application Priority Data**

Mar. 26, 2010 (JP) 2010-071995

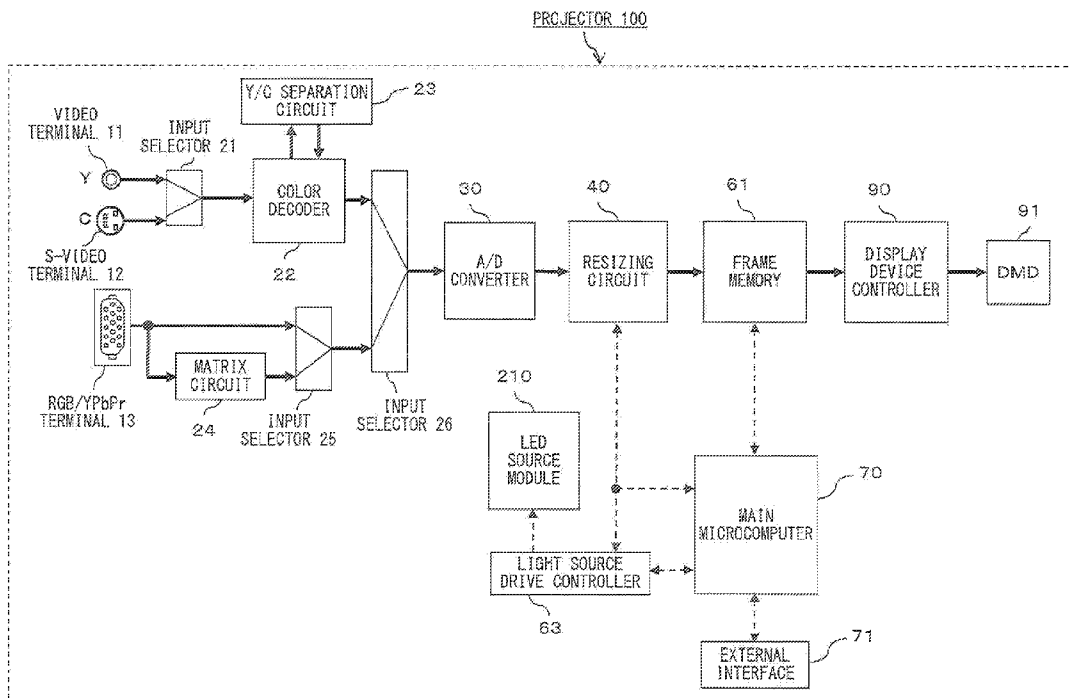


FIG. 1

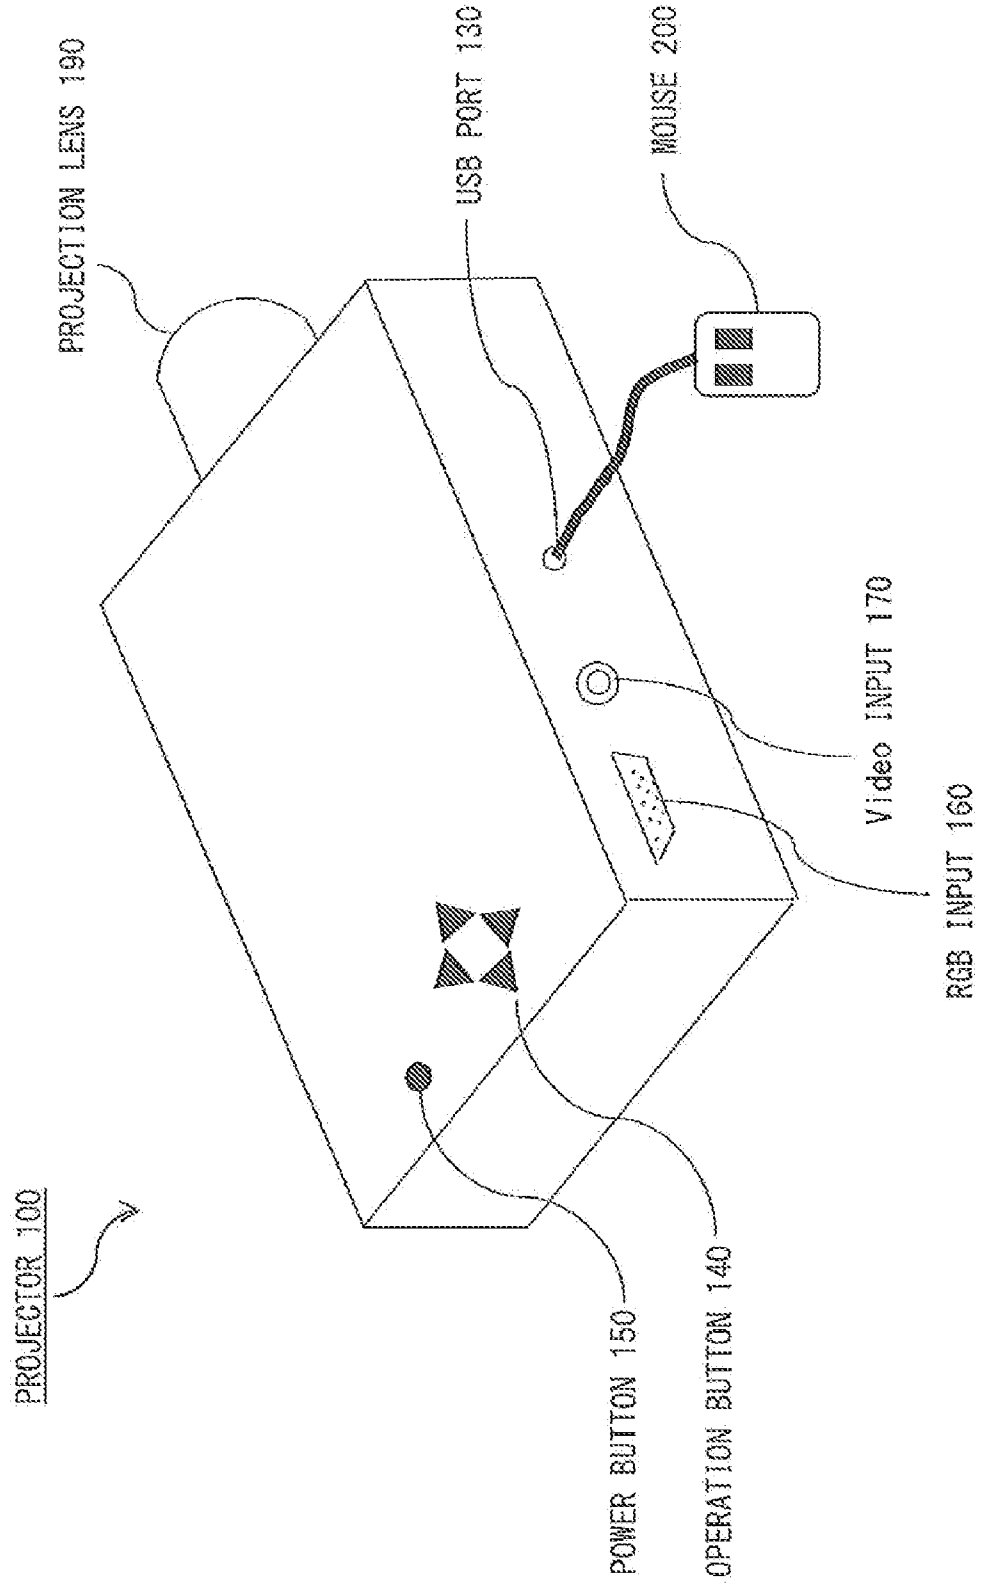
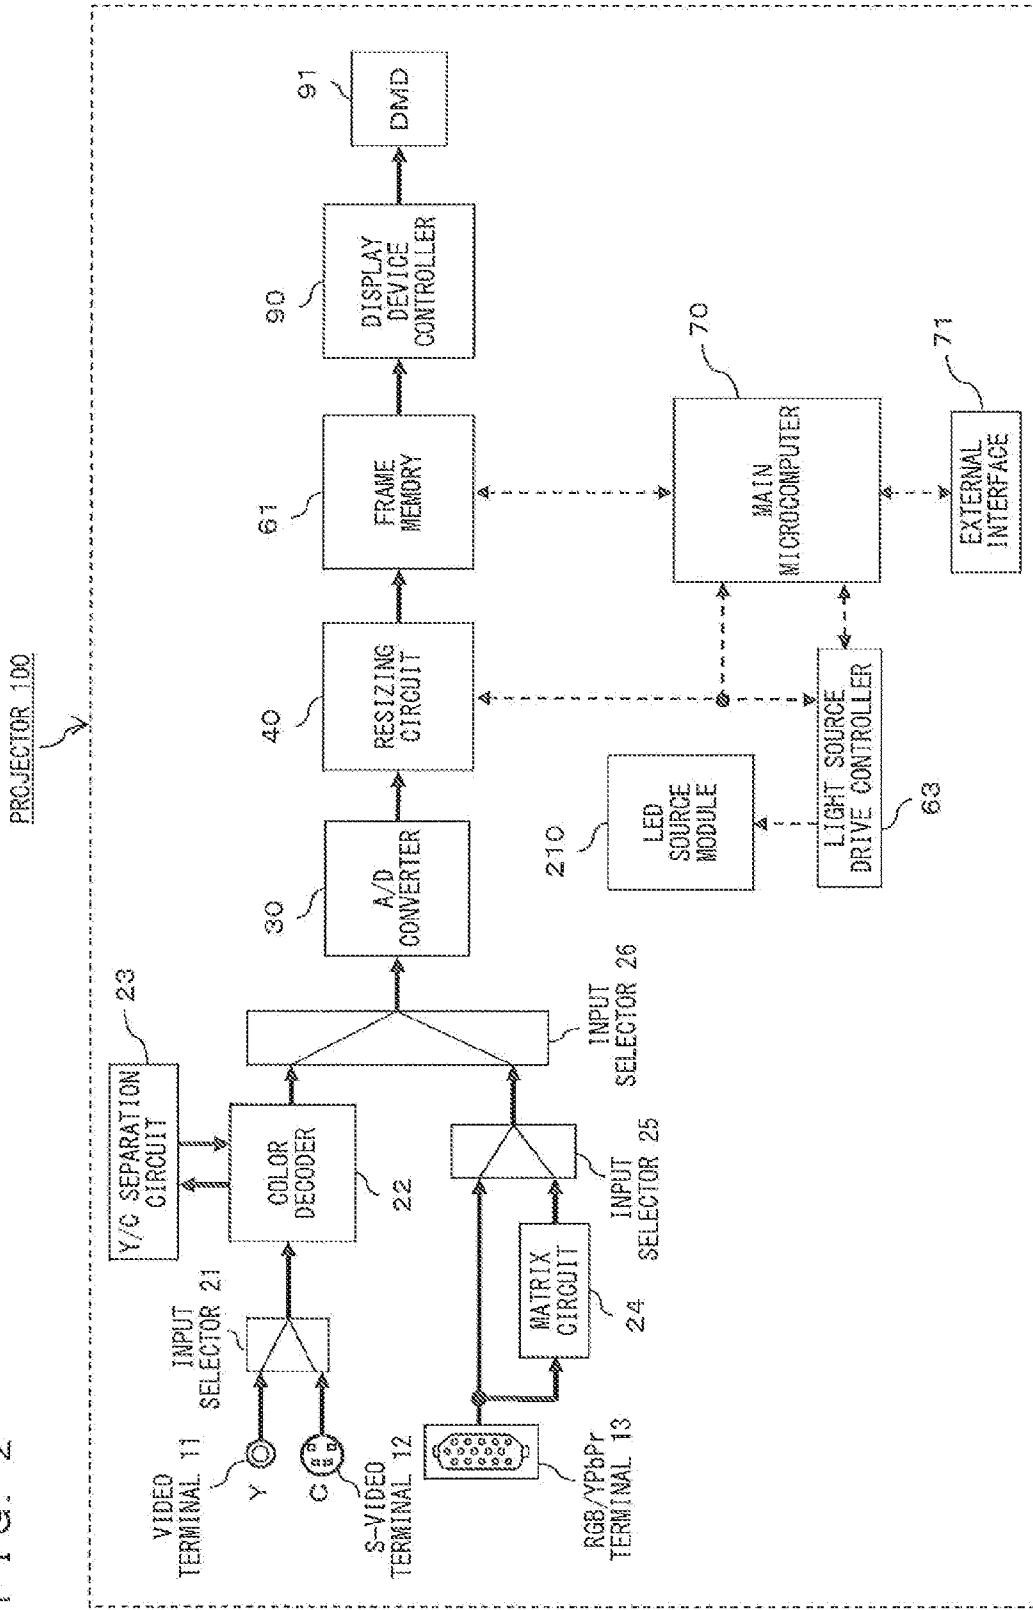


FIG. 2



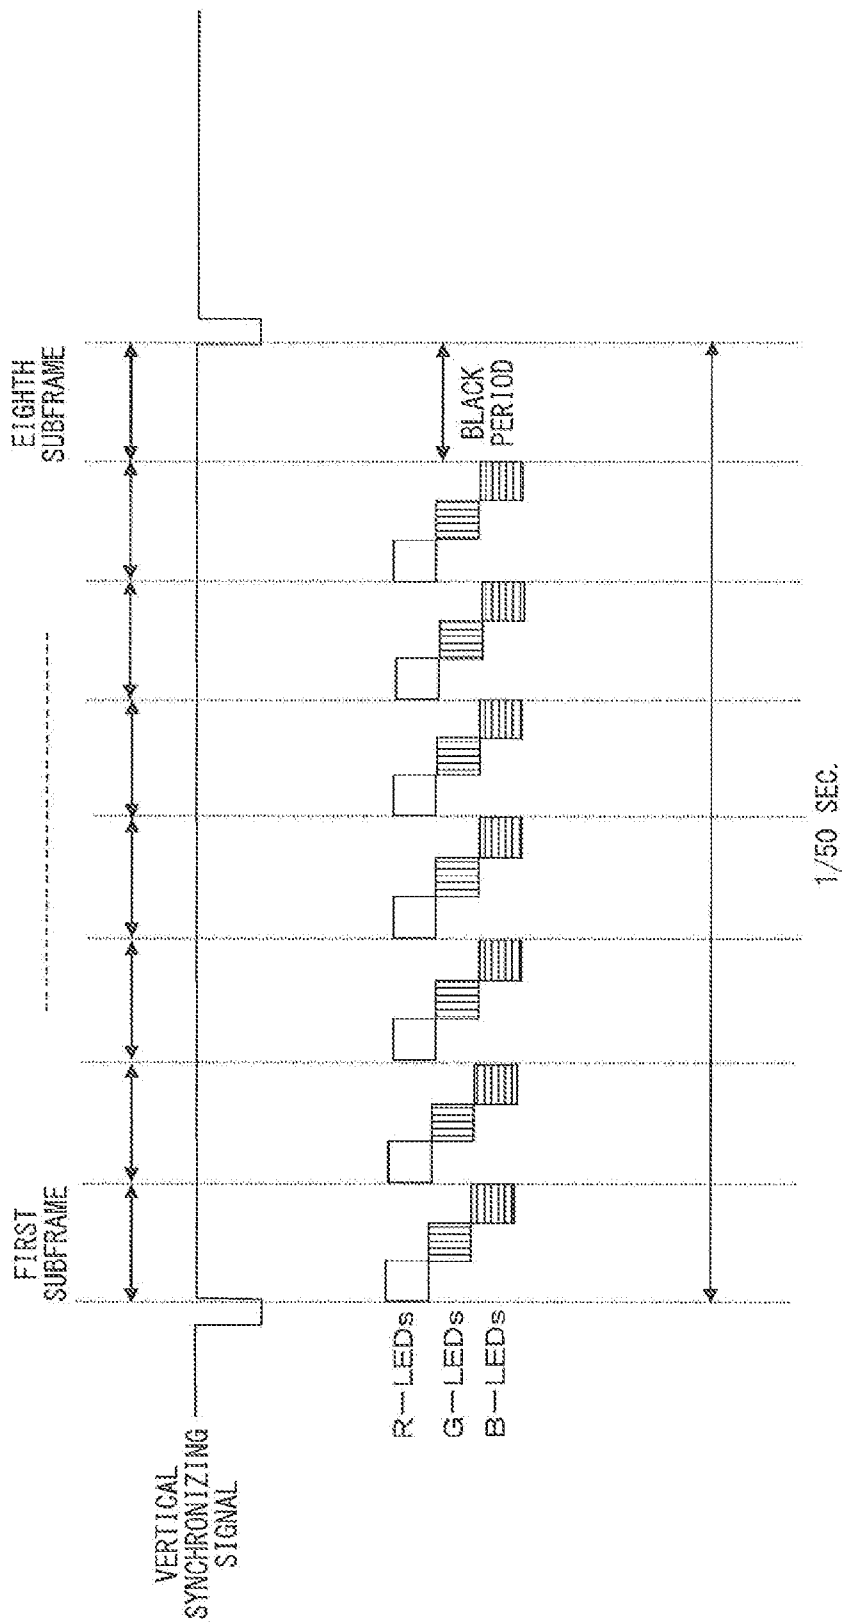


FIG. 3

FIG. 4

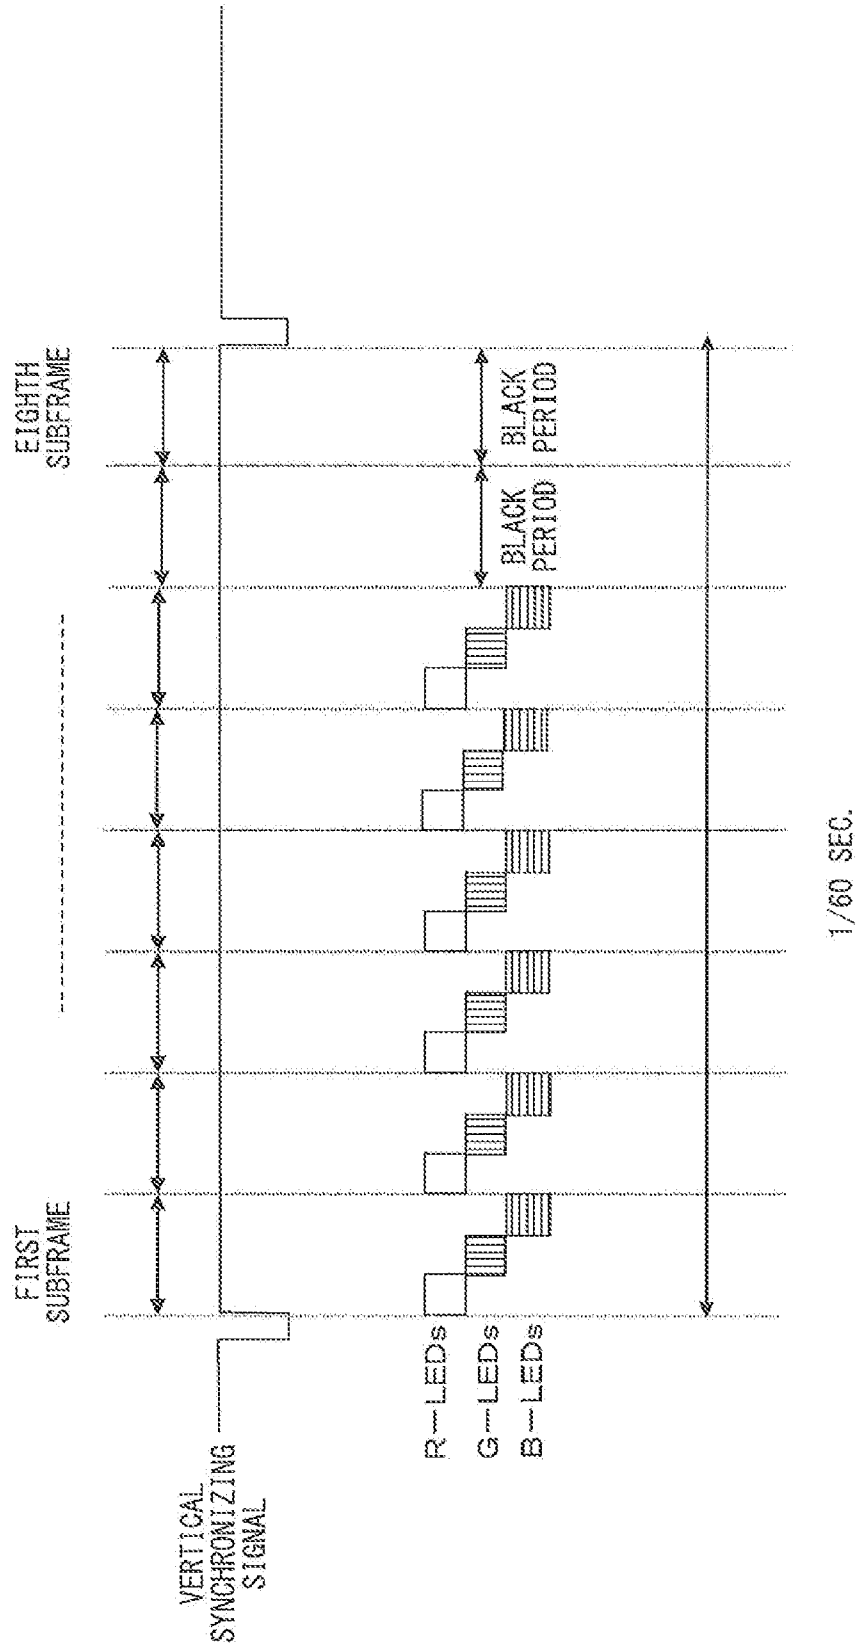
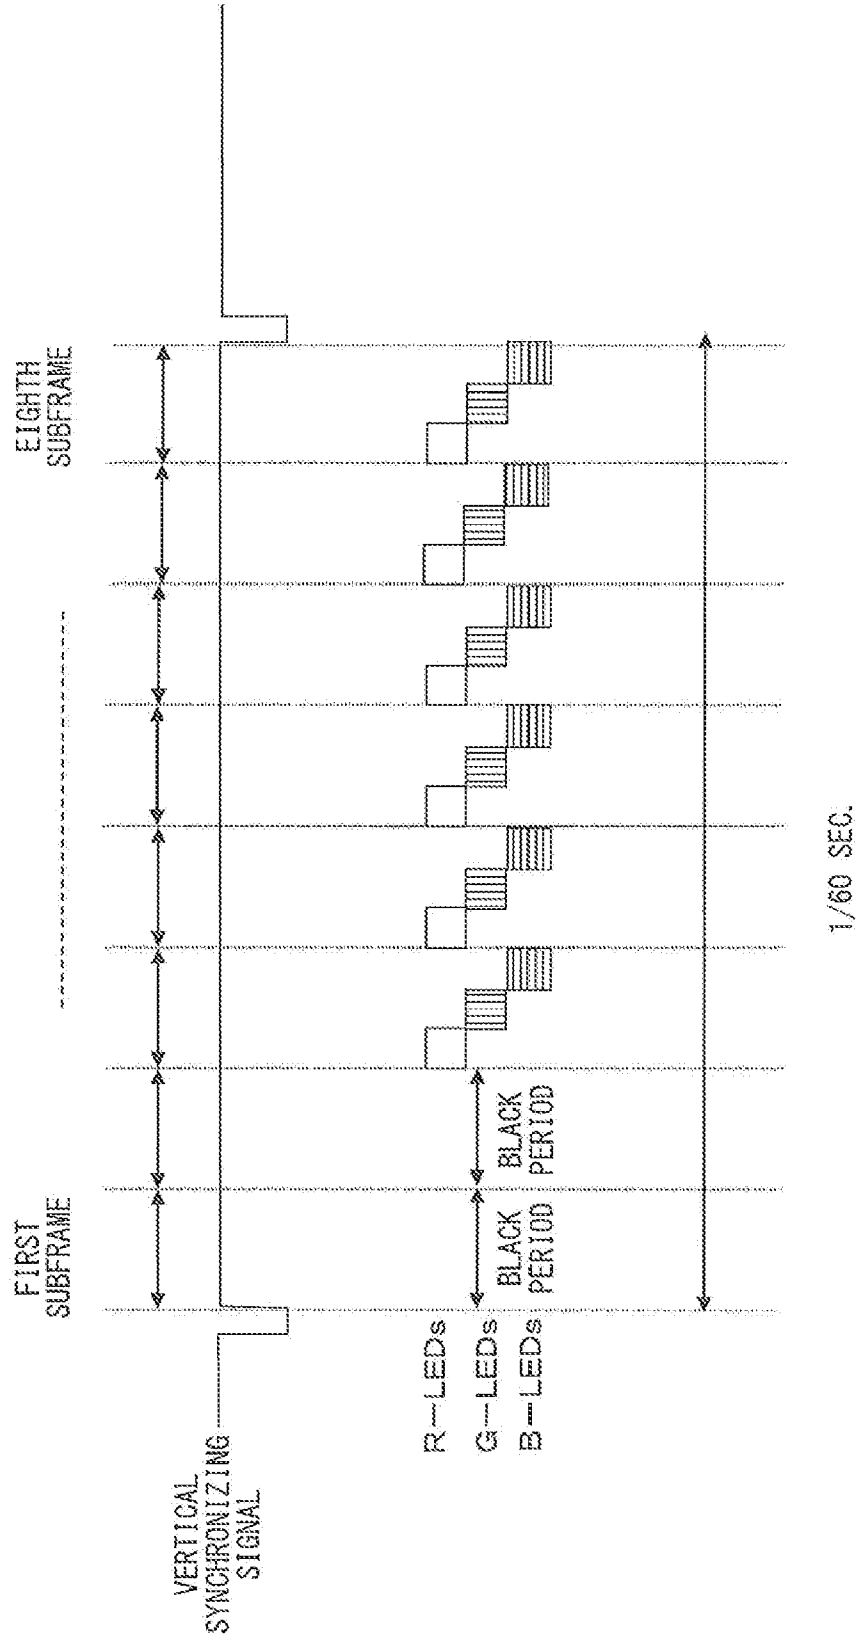


FIG. 5



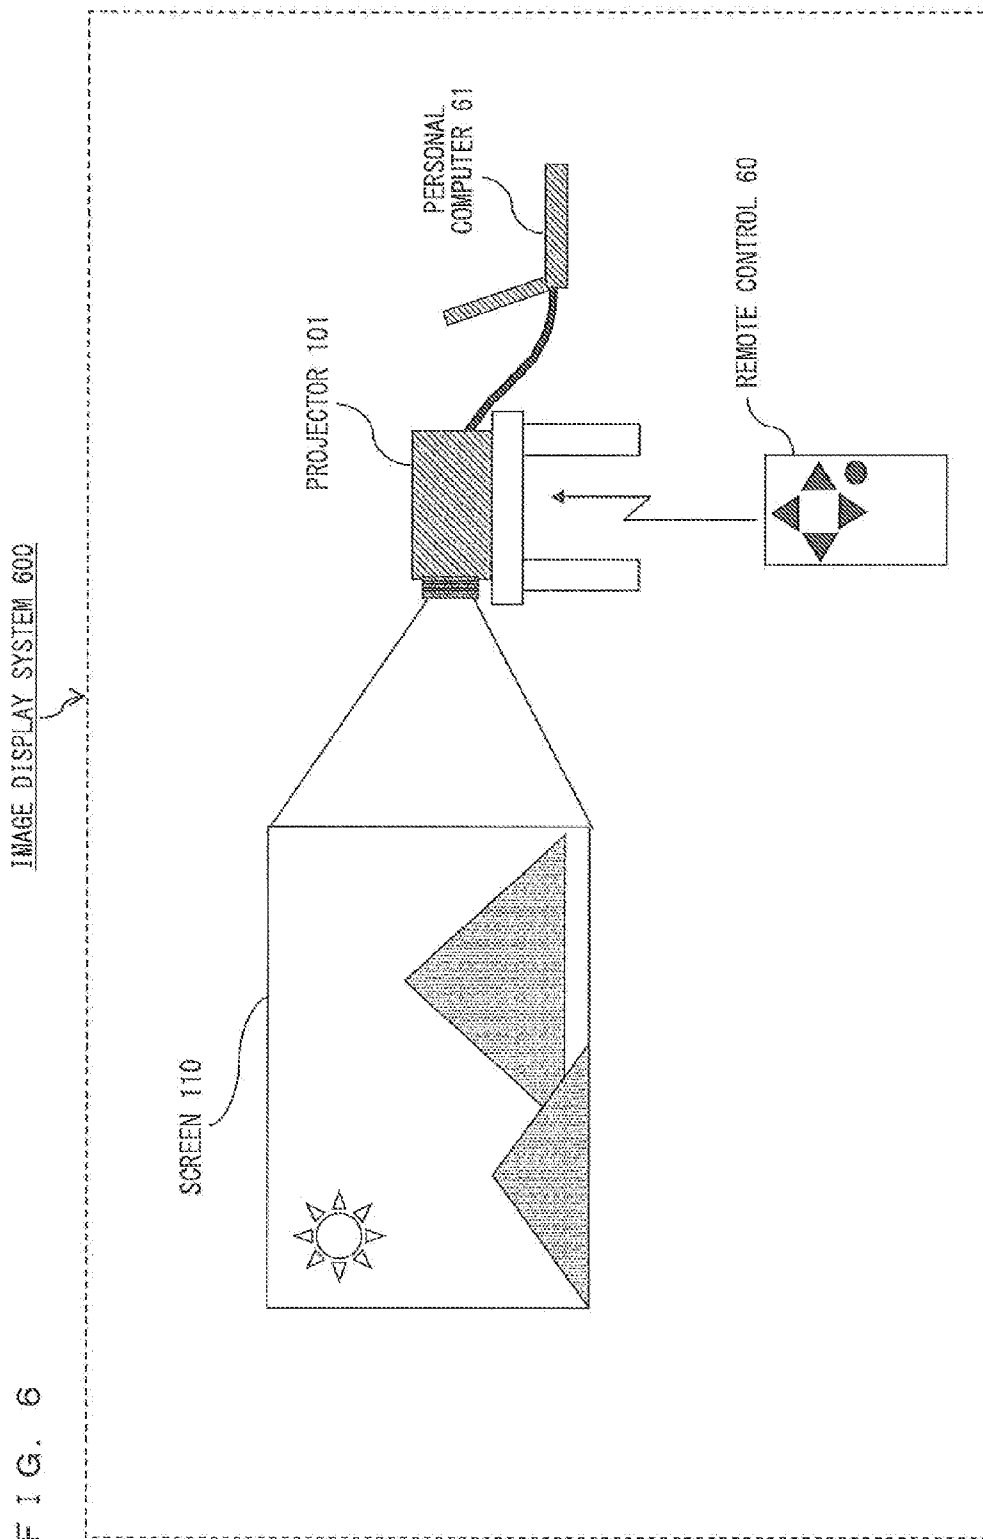


FIG. 6

FIG. 7

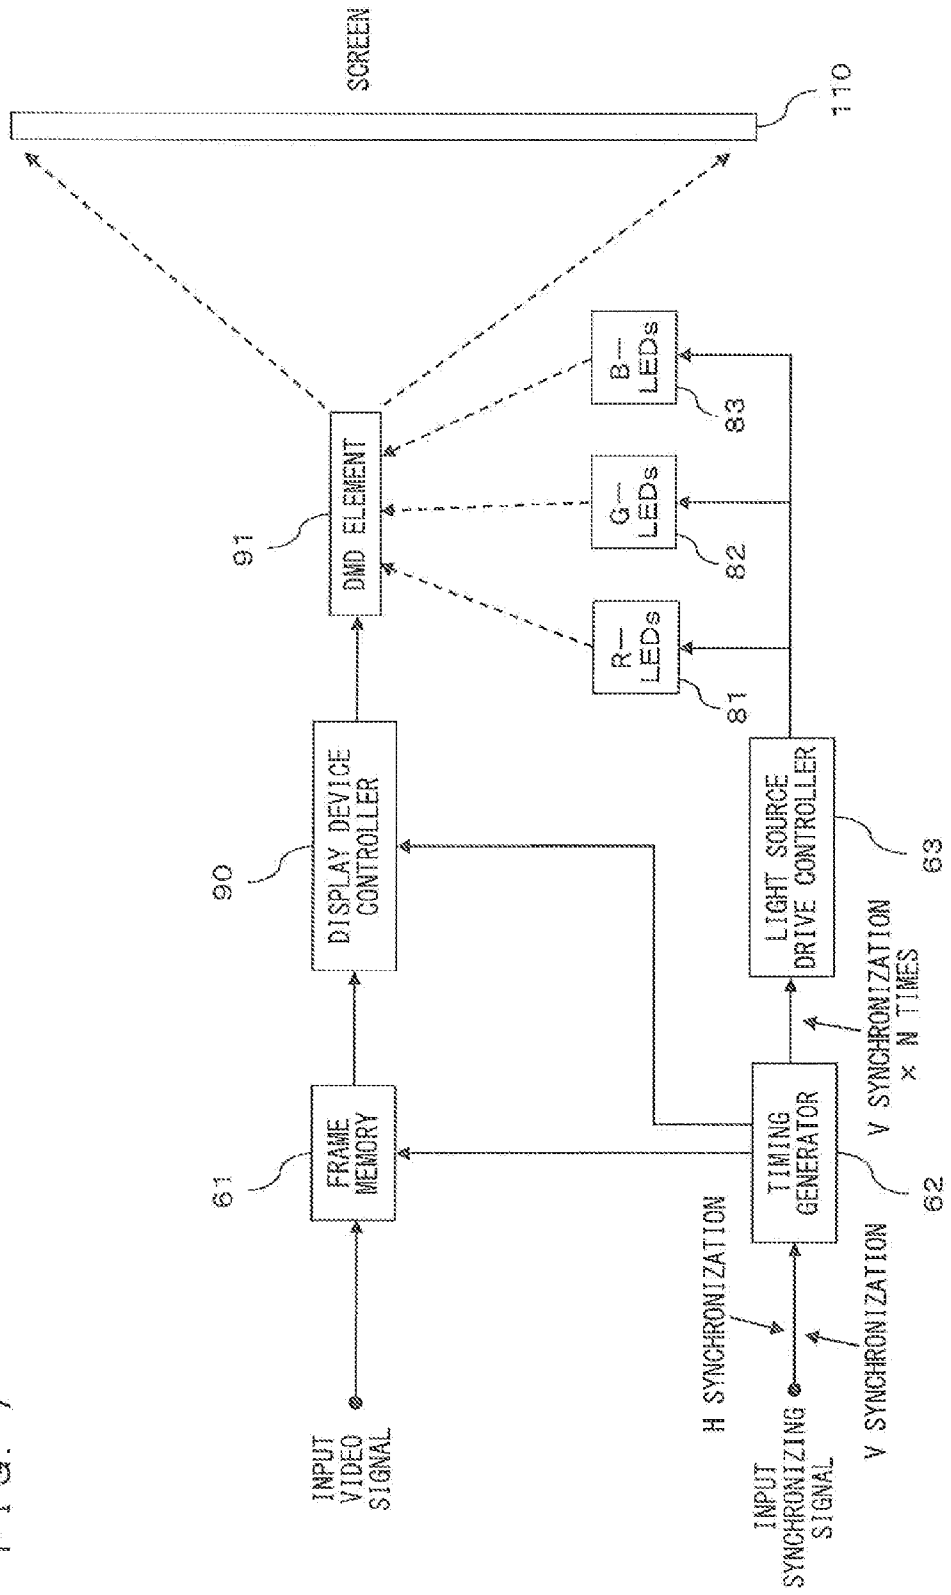


FIG. 8

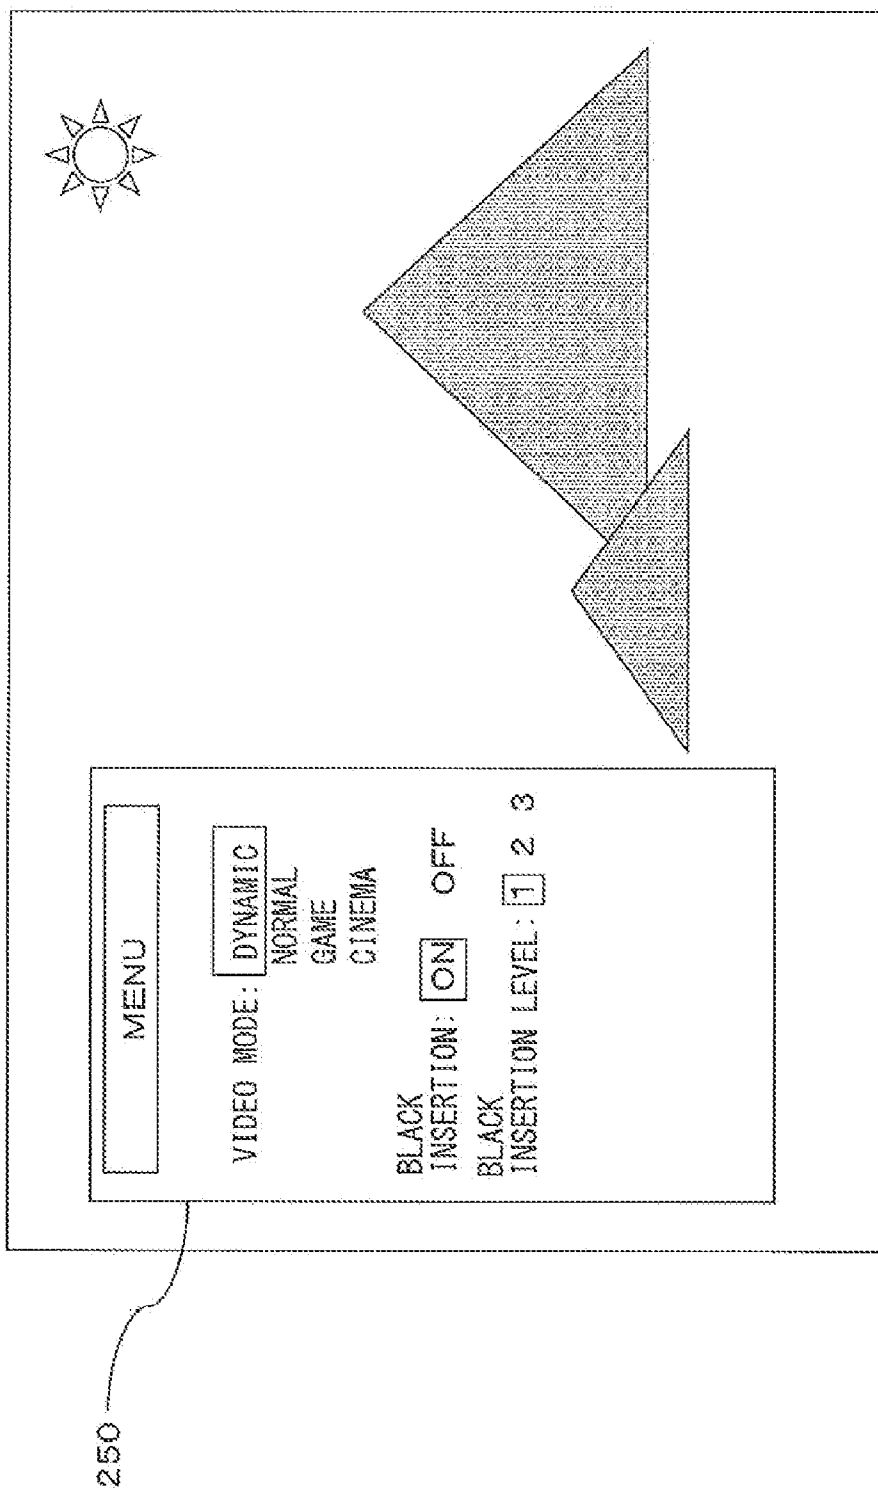


IMAGE DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The disclosure of Japanese Patent Application No. 2010-071995, filed on Mar. 26, 2010, is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to image display devices that display color images, and more particularly relates to color-image displaying image display devices that control after-images in motion pictures.

[0004] 2. Description of the Background Art

[0005] Conventionally, images are displayed on screens by using projectors which employ ultra high pressure mercury lamps. However, such conventional projectors have a relatively short life span, and have been prohibitive of realizing instant switch-on. In addition, the conventional projectors have insufficient luminance, and in most cases, due to the influence of such factors as the room lighting or the screen, have been prohibitive of representing, for example, a prepared chart with the colors visually recognizable as on the computer screen. Thus, to solve this problem, in recent years image display devices that are equipped with solid-state light sources such as light emitting diodes (LEDs) and laser diodes (LDs), in place of the conventional ultra high pressure mercury lamps, have been proposed.

[0006] In order to display color images, a conventional image display device is equipped with solid-state light sources which emit light having wavelengths of three primary colors (red (hereinafter referred to as "R"), green (hereinafter referred to as "G"), and blue (hereinafter referred to as "B")) and a modulator that is used in common for each of the solid-state light sources. The conventional image display device adopts a field sequential system which renders color images by high-speed flickering of the light from the solid-state light sources, and by controlling the modulator which modulates, in accordance with the flickering time, the light corresponding to the respective colors (e.g., see Japanese Laid-Open Patent Publication No. 2008-20600).

[0007] The conventional field sequential system has an R display period, a G display period, and a B Display period, which occur in order. In the R display period, only R-LEDs, which emit light having R wavelengths are lit, whereas the remaining light sources are turned off, and the modulator modulates only the R light. Accordingly, an R image is displayed. In the same manner, to display a G image and a B image, G-LEDs, which emit light having G wavelengths, and B-LEDs, which emits light having B wavelengths, are lit. The modulator then modulates the G light and the B light, respectively.

[0008] Another conventional image display device adopts a digital micromirror device (DMD, registered trademark of Texas Instruments Incorporated) as a modulator (e.g., see U.S. Pat. No. 5,969,710, and U.S. Pat. No. 6,778,155). This device employs a technique of bit splitting, in which during each of the R display period, the G display period, and the B display period, the DMD uniformly distributes within each period the time during which it reflects light from each light source, so as to reduce nonuniformity in light reflection time, thereby smoothing the luminance.

[0009] However, unlike impulse type display devices such as cathode-ray tubes, conventional hold-type display devices, such as DMD-employing image display devices and liquid crystal displays, cause a problem of generating image blur (motion blur) depending on the movement speeds of objects in moving images.

[0010] In order to reduce motion blur that arises in accordance with the moving speed of an object in a moving image, a technique of inserting a black signal synchronized to a vertical synchronization signal, as well as a technique of turning off the light that illuminates the display device have been disclosed. However, according to the conventional techniques, the black periods are distributed and the black period time span is short, and thus it has not been possible to reduce the motion blur sufficiently.

SUMMARY OF THE INVENTION

[0011] Therefore, an object of the present invention is to make available an image display device that can reduce motion blur, arising from a hold-type display device, in which after-images remain on the retina of a person's eyes when observing moving objects, and that enables the resolution of moving images to be improved.

[0012] To attain the above objects, the present invention has the following features. A first aspect of the present invention is an image display device for projecting and displaying an image on a screen, the device comprising: a plurality of solid-state light sources; a modulator configured to modulate light from the plurality of solid-state light sources; and an image display device configured to generate, from a frame of image data, a plurality of subframes that are each further divided into subfields, and to display the plurality of subframes. The modulator turns off light output from all the solid-state light sources for the duration of at least one or more subframes among the plurality of subframes.

[0013] With this configuration, a frame includes a period during which the light output from all of the solid-state light sources is turned off. Accordingly, it is possible to reduce motion blur, arising from a hold-type display device, in which after-images remain on the retina of a person's eyes when observing moving objects. In addition, since a frame includes a period during which the light output from all the solid-state light sources is turned off, power consumption can be reduced.

[0014] In a further aspect, the subframes during which the light output from all the solid-state light sources is turned off preferably includes, among the plurality of subframes, the initial or final subframe within a single frame period.

[0015] With this configuration, the center of the time-axis of a video display in a single frame period can be advanced/retarded, and thus it is possible to adjust the amount of delay with respect to lip-sync in a single frame.

[0016] In a further aspect, the one or more of the plurality of subframes during which the light output from all the solid-state light sources is turned off are preferably two or more consecutive subframes of the plurality of subframes.

[0017] With this configuration, it is possible to avoid after-images remaining on the retina of a person's eyes when observing moving objects as compared to a case of distributing the black periods during which the light output from all the solid-state light sources is turned off. And it is possible to further reduce motion blur arising from the hold-type display device.

[0018] In a further aspect, the number of the subframes during which the light output from all the solid-state light sources is turned off is preferably changed in accordance with the type of content and operating environment of the image display device.

[0019] For example, even if the number of subframes is fixed, there is a case where the duration of a subframe varies depending on the frequency of the vertical synchronizing signal. However, with the above-described configuration, the number of subframes during which the light output from all the solid-state light sources is turned off is set optimally.

[0020] Further, in accordance with the movement speed of an object in a moving image, in accordance with the signal type to be inputted, or in accordance with the type of content to be displayed, for example, the number of subframes during which the light output from all the solid-state light sources is turned off can be optimally set.

[0021] In a second aspect the present invention is an image display device for projecting and displaying an image on a screen, the device comprising: a plurality of light sources; a modulator configured to modulate light from the plurality of light sources; and an image display device configured to generate, from a frame of image data, a plurality of subframes each further divided into subfields, and to display the plurality of subframes. The image display device is configured to display one or more of the plurality of subframes in black.

[0022] With this configuration, even if the light output from all the solid-state light sources is not turned off, a black signal is inserted as a video signal thereby to realize a black display. Thus, it is possible to reduce motion blur, arising from a hold-type display device, in which after-images remain on the retina of a person's eyes when viewing moving objects.

[0023] In a further aspect, the one or more of the plurality of subframes displayed in black preferably includes, among the plurality of subframes, the initial or final subframe within a single frame period.

[0024] With this configuration, the center of the time-axis of a video display in a frame period can be adjusted, and thus, it is possible to adjust the amount of delay relative to lip-sync in the frame.

[0025] In a further aspect, the one or more of the plurality of subframes displayed in black are preferably two consecutive subframes of the plurality of the subframes.

[0026] With this configuration, it is possible to avoid after-images remaining on the retina of a person's eyes when viewing moving objects as compared to a case of distributing the black periods during which the light output from all the solid-state light sources is turned off. And it is possible to further reduce motion blur arising from the hold-type display device.

[0027] In a further aspect, the number of the subframes displayed in black is preferably changed in accordance with the type of content and operating environment of the image display device.

[0028] For example, even if the number of subframes is fixed, there is a case where the duration of a subframe varies depending on the frequency of the vertical synchronizing signal. However, with the above-described configuration, the number of subframes during which the light output from all the solid-state light sources is turned off is set optimally.

[0029] Further, in accordance with the movement speed of an object in a moving image, in accordance with the signal type to be inputted, or in accordance with the type of content to be displayed, for example, the number of subframes during

which the light output from all the solid-state light sources is turned off can be optimally set.

[0030] As described above, with the image display device of the present invention, a frame period includes a period during which the light output from all the solid-state light sources is turned off, or during which a black signal is inserted as a video signal to realize a black display. Thus, it is possible to reduce motion blur, arising from a hold-type display device, in which after-images remain on the retina of a person's eyes when viewing moving objects. In addition, it is possible to improve the resolution of moving images.

[0031] The image display device according to the present invention can advantageously reduce motion blur of moving images displayed on an extensive color-gamut display which employs LED sources, and is suitable for high-definition high-resolution display such as a high definition television.

[0032] These and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] FIG. 1 is a configuration diagram illustrating the outer appearance of a projector **100**, which is an image display device according to the present invention;

[0034] FIG. 2 is a functional block diagram illustrating the internal configuration of the projector **100**;

[0035] FIG. 3 is a timing chart illustrating an operation of an LED module **210** in the case where a PAL (Phase Alternating Line) signal whose vertical synchronizing signal has a frequency of 50 Hz is inputted;

[0036] FIG. 4 is a timing chart illustrating an operation of the LED module **210** in the case where an NTSC (National Television System Committee) signal whose vertical synchronizing signal has a frequency of 60 Hz is inputted;

[0037] FIG. 5 is a timing chart illustrating an operation of the LED module **210** in the case where first and second subframes, which are two consecutive subframes of first to eighth subframes, are set as black periods;

[0038] FIG. 6 is a configuration diagram illustrating the outer appearance of an image display system **600** employing a projector **101**, which is an image display device according to the present invention;

[0039] FIG. 7 is a functional block diagram illustrating the internal configuration of the projector **101**; and

[0040] FIG. 8 is a diagram illustrating how to control, in the projector **101**, the number of black period subframes depending on the type of content and operating environment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0041] Hereinafter, embodiments of the present invention will be described with reference to the accompanying drawings.

First Embodiment

[0042] An image display device according to a first embodiment of the present invention will be described with reference to FIG. 1.

[0043] FIG. 1 is a configuration diagram illustrating the outer appearance of a projector **100**, which is an image display device according to the present invention. In FIG. 1,

when a user of the projector **100** presses a POWER button **150**, power is fed to the projector **100**. The projector **100** then processes video signals inputted thereto, and outputs enlarged projection images through a projection lens **190** by using a LED light source module (not shown) included in the projector **100**.

[0044] The projector **100** includes, as input interfaces, an RGB input **160** and a video input **170**, which are respectively connected to an external video signal output device (not shown) such as a personal computer. The projector **100** includes a USB port **130**. If a mouse **200** is connected to the projector **100** via the USB port **130**, the mouse accepts the user's operation, and functions as a pointer moving on a screen, on which the setting status of the projector **100** and enlarged projection images are displayed. Operation of the operation buttons **140** by the user also realizes the same function.

[0045] Next, with reference to FIG. 2, the internal configuration of the projector **100** will be described. FIG. 2 is a functional block diagram illustrating the internal configuration of the projector **100**.

[0046] A VIDEO terminal **11** receives inputs of composite video signals which are defined based on the National Television System Committee (NTSC) system and the Phase Alternating Line (PAL) system.

[0047] An S-VIDEO terminal **12** receives inputs of S-VIDEO signals.

[0048] An RGB/YPbPr terminal **13** receives inputs of RGB signals or YPbPr signals.

[0049] An input selector **21** is used for selecting either composite video signals inputted through the VIDEO terminal **11** or the S-VIDEO signals inputted through the S-VIDEO terminal **12**.

[0050] A Y/C separation circuit **23** is a circuit which separates a composite video signal inputted through a color decoder **22** into a Y-signal and a C-signal.

[0051] The color decoder **22** performs color decoding of Y-signal and C signal, which have been subjected to Y/C separation by the Y/C separation circuit **23**, or Y/C-signal into a YPbPr signal. The YPbPr signal is converted to the RGB signal by a matrix circuit (not shown).

[0052] The matrix circuit **24** is designed to perform matrix processing when the YPbPr signal inputted through the RGB/YPbPr terminal **13** is converted to the RGB signal.

[0053] An input selector **25** is used for selecting a signal representing either the RGB signal inputted through the RGB/YPbPr terminal **13** or the RGB signal generated by the matrix circuit **24**.

[0054] An input selector **26** is used for selecting either the YPbPr signal generated by the color decoder **22** or the RGB signal inputted by the input selector **25**. The signal to be inputted to the input selector **26** is an analog video signal, and the analog video signal selected by the input selector **26** is inputted to an analog/digital (A/D) converter **30**.

[0055] The A/D converter **30** performs A/D conversion of the analog video signal selected by the input selector **26** to an 8-bit digital signal.

[0056] A resizing circuit **40** resizes the digital signal, which has been subjected to the A/D conversion by the A/D converter **30**, so as to be displayed on the screen, in accordance with the number of pixels in a DMD **91**.

[0057] The frame memory **61** converts the vertical frequency of the inputted signal to 50 Hz or 60 Hz, and includes data used for field sequential driving of the DMD **91**.

[0058] A main microcomputer **70** controls the whole device, that is, controls the power supply (not shown), fan (not shown), temperature (not shown), input switching, and the like, for example. The main microcomputer **70** also sets the number of subframes that are to be displayed in black, based on the data from an external interface **71**. The main microcomputer **70** controls a light source drive controller **63**, based on the set number of subframes that are to be displayed in black.

[0059] In addition, the main microcomputer **70** forwards to the light source drive controller **63** the level of current of the LEDs to be driven, and sets the desired value in the LED light source module **210**. The LED light source module **210** includes R-LEDs, G-LEDs, and B-LEDs.

[0060] A display device controller **90** controls driving of the DMD **91** so that the respective pixels corresponding to the R-LED, G-LED, and B-LED are driven in desired subframes and subfields. More specifically, the display device controller **90** uses the bit splitting technique which uniformly distributes, in the respective periods of the R display period, G display period, and B display period, the time to reflect, by the DMD, each light ray from the corresponding light source so as to reduce nonuniformity of the light reflection time, thereby smoothing the luminance.

[0061] FIG. 3 is a timing chart illustrating an operation of the LED module **210** in the case where a Phase Alternating Line (PAL) signal whose vertical synchronizing signal has a frequency of 50 Hz is inputted. As illustrated in FIG. 3, one cycle (1/50 sec) includes eight subframes, and each subframe includes R-LED subfield, G-LED subfield, and B-LED subfield.

[0062] In each subfield, to smooth the luminance, 8-bit patterns (256 patterns) are divided by eight into 32 levels, each having five luminance levels.

[0063] Turning off all the R-LED, G-LED, and B-LED is performed in units of subframes. As shown in FIG. 3, all the R-LEDs, G-LEDs, and B-LEDs is turned off in the eighth subframe, which is the last subframe, whereby a black period is realized in the subframe.

[0064] Next, an operation of the projector **100**, which is an image display device according to the present invention, will be described.

[0065] A PAL signal inputted through the VIDEO terminal **11** is separated by the Y/C separation circuit **23** into a Y-signal and a C-signal, and the separated Y-signal and C-signal are subjected to color decoding by the color decoder **22**, and decoded into a Y-signal, a Pb signal, and a Pr signal. The Y-signal, the Pb signal, and the Pr signal are converted to an R signal, a G signal, and a B signal, and then are subjected to A/D conversion by the A/D converter **30**.

[0066] The resizing circuit **40** resizes the digital signal which is subjected to the A/D conversion by the A/D converter **30** to 1024×768 pixels so as to correspond to the resolution of the DMD **91**, and then writes the resized digital signal into the frame memory **61**. The digital signal written into the frame memory **61** is outputted from the frame memory **61** in association with a synchronization signal.

[0067] The display device controller **90** generates subfields and subframes so that lighting times of the R-LED, G-LED, and B-LED in the LED light source module **210** satisfy the timing chart illustrated in FIG. 3, and transfers the data to the DMD **91**. In addition, the display device controller **90** controls ON/OFF of the DMD **91** thereby to realize the gradation expression.

[0068] Here, in the case of the PAL signal, its vertical synchronizing signal has a frequency of 50 Hz, and one subframe period thereof is longer than that of NTSC signal, whose vertical synchronizing signal has a frequency of 60 Hz. As shown in FIG. 3, in the eighth subframe period, all the R-LEDs, G-LEDs, and B-LEDs are turned off to provide a black period, and thereby motion blur is reduced.

[0069] The more the number of subframes of the black period increases, the more the motion blur is reduced, and thereby the moving image resolution can be improved. However, the increased number of subframes of the black period deteriorates the projector luminance. In that case, the number of subframes of the black period is controlled depending on the type of content and operating environment.

[0070] As described above, according to the projector 100, i.e., the image display device of the present invention, the black period is provided in the last frame of the eighth subframe, as shown in FIG. 3, and thereby it is possible to reduce image blur (motion blur) caused by after-images remaining on the retina of a person's eyes when viewing moving objects.

[0071] According to the projector 100, i.e., the image display device of the present invention, the luminance is smoothed by using the bit splitting technique, which avoids generation of moving image pseudo contours. And in addition, a period allocated to each bit of luminance does not depend on the size of the bit, but the luminance is uniformly distributed in the respective subframe periods, and thus smooth luminance distribution is realized. As a result, even if a black period is provided in the subframe, it is possible to minimize gradation insufficiency, and thus the motion blur reduction effect by the black period insertion can be exerted.

[0072] As shown in FIG. 3, this embodiment describes the case where the PAL signal is inputted, whose vertical synchronizing signal has the frequency of 50 Hz. However, the present invention is not limited to this, but for example, a NTSC signal whose vertical synchronizing signal has a frequency of 60 Hz may be applied.

[0073] FIG. 4 is a timing chart illustrating an operation of the LED module 210 in the case where the NTSC signal whose vertical synchronizing signal has the frequency of 60 Hz is inputted. As shown in FIG. 4, one cycle ($\frac{1}{60}$ sec) includes eight subframes, and each subframe period is shorter than that illustrated in FIG. 3. Accordingly, in the consecutive two subframe periods, i.e., in the seventh and eighth subframes, all the R-LEDs, G-LEDs, and B-LEDs are turned off to provide a black period, and thereby motion blur is reduced.

[0074] Further, in FIG. 3 and FIG. 4, among the first to eighth subframes, the last frame of the eighth subframe, or the consecutive last two subframes of the seventh and eighth subframes, are set as the black period. However, setting of the black period is not limited to these.

[0075] For example, in the case where images change on a frame-by-frame basis, at respective frame boundaries, the first frame, or the first consecutive two subframes, i.e., the first and second subframes, among the first to eighth subframes, may be set as the black period. FIG. 5 is a timing chart illustrating an operation of the LED module 210 in the case where the first two consecutive subframes among the first to eighth subframes, i.e., the first and second subframes, are set as the black period. As shown in FIG. 5, after a synchronization signal is inputted, in the two consecutive subframe periods of the first and second subframes, all the R-LEDs, G-LEDs, and B-LEDs are turned off to provide the black period. Accordingly, motion blur can be reduced, in the same

manner as the case where all the R-LEDs, G-LEDs, and B-LEDs are turned off in the consecutive two subframe periods of the seventh and eighth subframes to provide the black period.

[0076] In FIG. 4, the center of the luminance (central luminance) of an image of a frame is located in the third and fourth subframes, whereas in FIG. 5, the central luminance is located in the fifth and sixth subframes. Thus, by setting the black period either in the seventh and eighth subframes or in the first and second subframes, among the first to eighth subframes, it is possible to adjust image delay relative to sound.

[0077] In the case where the vertical synchronizing signal has the frequency of 60 Hz, all the R-LEDs, G-LEDs, and B-LEDs are turned off in two or three subframes to provide the black period, whereby motion blur is reduced, and in addition, deterioration in the projector luminance can be made indistinct. Specifically, 10 to 30% of all the subframes can be set as the black period.

[0078] Here, the more the number of subframes of the black period is increased, the more the motion blur is reduced, and thereby the moving image resolution can be improved. However, the increased number of subframes of the black period deteriorates the projector luminance. In that case, the number of subframes of the black period is controlled depending on the type of content, and operating environment.

Second Embodiment

[0079] A picture display system according to a second embodiment of the present invention will be described with reference to FIG. 6.

[0080] FIG. 6 is a configuration diagram illustrating the outer appearance of an image display system 600 employing a projector 101, which is an image display device of the present invention. In FIG. 6, a personal computer 61 is connected to an RGB terminal (corresponding to the RGB input 160 of the projector 100 illustrated in FIG. 1) of the projector 101, and an image on the personal computer 61 is projected on a screen 110 by the projector 101. In this case, functions of the projector 101 may be controlled by the user's operation of a remote control 60.

[0081] The basic configuration of the projector 101 according to this embodiment is substantially the same as that of the projector 100 according to the first embodiment of the present invention illustrated in FIGS. 1 and 2. Thus no description will be given of the same components in the configuration, and those components which are different from those in the projector 100 will be described.

[0082] FIG. 7 is a functional block diagram illustrating the internal configuration of the projector 101. FIG. 7 illustrates the relation between an input video signal and an input synchronization signal, and also illustrates in detail a part of the internal configuration which is different from that of the projector 100 illustrated in FIG. 2.

[0083] The input video signal, which is resized by the resizing circuit to have the same resolution as the DMD, is written into the frame memory 61 based on a timing signal which is generated by the timing generator 62 using the input synchronization signal as the reference.

[0084] Next, based on an output synchronization signal generated by the timing generator 62, image data of one frame is read from the frame memory 61. The display device con-

troller **90** generates, based on the read image data of one frame, subframes each further divided into subfields thereby to control the DMD **91**.

[0085] The light source drive controller **63** controls lighting of R-LEDs **81**, G-LEDs **82**, and B-LEDs **83** in the LED light source module, based on n-times synchronization signals which corresponds to n subframes generated by the timing generator **62**.

[0086] In the projector **101** according to this embodiment, in which subframe period the black period is to be provided is substantially the same in the first embodiment of the present invention illustrated in FIG. **3** to FIG. **5**. In this embodiment, the number of subframes of black period can be also controlled depending on the type of content and operating environment. The number of subframes of the black period may be set by a user's selection of a display mode. That is, the user operates the remote control **60** or the operation buttons **140** to select the display mode. Alternatively, projectors may have their individual display modes which are set in advance depending on the types of the projector.

[0087] FIG. **8** is a diagram illustrating how to control the number of subframes of the black period, in the projector **101**, depending on the type of content and operating environment. As shown in FIG. **8**, in the projector **101**, video modes are prepared in advance which include, for example, a cinema mode which suppresses brightness of highlighted portions in movie contents, a dynamic mode which emphasizes brightness, and the like. Insertion of a black period in the dynamic mode, which emphasizes brightness, deteriorates the brightness. Thus, in such a video mode, insertion of the black period is controlled not to be performed.

[0088] As described above, depending on the video modes, the light source drive controller **63** controls the R-LEDs **81**, G-LEDs **82**, and B-LEDs **83** not to be turned off in subframes, or controls the number of subframes during the period of which all the LEDs are turned off, and thereby the light source drive controller **63** controls the number of subframes of the black period.

[0089] Alternatively, an ON/OFF control of black period insertion may be performed on a onscreen menu **250** by the user's manual operation using the remote control **60** or the operation buttons **140**. Alternatively, it may be set such that the user may be allowed to select the number of subframes (level) of the black period to insert the black period.

[0090] As described above, if operation of the remote control **60** or the operation buttons **140** allows the user to select a video mode, to determine whether the black period is to be inserted, and to determine how many number of subframes (level) of the black period are to be inserted, then the user can easily reduce motion blur in accordance with the types of content and operating environment. Accordingly, an optimal setting can be realized to maintain the projector luminance.

[0091] That is, an optimal setting can be realized for various content in accordance with the type of content and the operating environment—for example, a game content which includes objects moving at high speed and thus requires a longer black period, or a content including few moving images which requires improved brightness and thus requires a shorter or no black period.

[0092] To the RGB/YPbPr terminal **13**, an RGB signal or a YPbPr signal is inputted. Generally, the YPbPr signal represents a moving image, and the RGB signal represents a still

image. Thus, it can be set such that if the YPbPr signal is inputted, the number of subframes of the black period is increased.

[0093] Still, there may be a case where an RGB signal which represents a moving image is inputted. In this case, it can be set such that even if the RGB signal is inputted, the user can manually increase the number of subframes of the black period thereby to reduce motion blur.

[0094] The projectors according to the first and second embodiments of the present invention turn off the LEDs and generate the subframe of the black period, thereby realizing reduction in motion blur. However, the technique of generating the subframe of the black period is not limited thereto. For example, the subframe of the black period may be generated by controlling the display device controller **90** thereby to output a black signal as a video signal, and this technique exerts the same effect as the above-described technique.

[0095] The projectors according to the first and second embodiments of the present invention employ the DMD. However, the projector may be realized by an LCD projector.

[0096] The processing of the present invention may be realized by software. That is, the present invention is not limited to an image display device, and is applicable to a display method.

[0097] While the invention has been described in detail, the foregoing description is in all aspects illustrative and not restrictive. It will be understood that numerous other modifications and variations can be devised without departing from the scope of the invention.

What is claimed is:

1. An image display device for projecting and displaying an image on a screen, the device comprising:
 - a plurality of solid-state light sources;
 - a modulator configured to modulate light from the plurality of solid-state light sources; and
 - an image display device configured to generate, from a frame of image data, a plurality of subframes each further divided into subfields, and to display the plurality of subframes; wherein
 - the modulator is configured to turn off light output from all the solid-state light sources for the duration of at least one or more subframes among the plurality of subframes.
2. The image display device according to claim 1, wherein the subframes during which the light output from all the solid-state light sources is all turned off includes, among the plurality of subframes, the initial or final subframe within a single frame period.
3. The image display device according to claim 2, wherein the one or more of the plurality of subframes during which the light output from all the solid-state light sources is turned off are two or more consecutive subframes of the plurality of subframes.
4. The image display device according to claim 1, wherein the number of the subframes during which the light output from all the solid-state light sources is turned off is changed in accordance with the type of content and operating environment of the image display device.
5. An image display device for projecting and displaying an image on a screen, the device comprising:
 - a plurality of light sources;
 - a modulator configured to modulate light from the plurality of light sources; and

an image display device configured to generate, from a frame of image data, a plurality of subframes each further divided into subfields, and to display the plurality of subframes; wherein

the image display device is configured to display one or more of the plurality of subframes in black.

6. The image display device according to claim 5, wherein the one or more of the plurality of subframes displayed in black includes, among the plurality of subframes, the initial or final subframe within a single frame period.

7. The image display device according to claim 6, wherein the one or more of the plurality of subframes displayed in black are two consecutive subframes of the plurality of the subframes.

8. The image display device according to claim 6, wherein the number of the subframes displayed in black is changed in accordance with the type of content and operating environment of the image display device.

* * * * *