

USER GUIDE

LE-313

STAR BLAZER

ODYSSEY



Thank you for choosing Odyssey Lighting. These lighting effect features have preinstalled lamps and are ready to be used.

IMPORTANT!

Please read this User Guide before attempting to operate unit.

OPERATING INSTRUCTIONS

This unit is ready to be used. Multi-colored beams will chase amongst each other to audio (bass) sounds in music via the internal microphone. Make sure the effect is installed and operated in a well ventilated area with fan vents clear of obstacles. For the ultimate effect, fog or haze must be used in order to see the colorful beams. Although the unit is fan cooled the duty cycle must be applied.

CAUTION

The lens area will get hot during normal operation of unit. After operation allow sufficient time to cool down before handling or moving the unit.

IMPORTANT!

Never open the unit when in use. Always disconnect the power cord from the power source when replacing lamps or servicing the unit. Always replace fuse and /or lamp with the exact same type.

LAMP REPLACEMENT

Remove Lamp cover from the main body of the unit. Gently remove the old lamp, Then, using a clean cloth or glove, carefully insert the new lamp into the ceramic socket. NEVER TOUCH A NEW LAMP WITH YOUR BARE HANDS or FINGERS (oil and dirt on your skin will damage the bulb).

TROUBLESHOOTING

1. If the effect does not turn on	a) try plugging into an outlet you know is working. b) check fuse & make sure it is not blown
-----------------------------------	--

WARNING
CAUTION:
UNPLUG UNIT
 To avoid electrical shock unplug unit before servicing!
 For Lamp Replacement:
 Only use exact same voltage & lamp type

IMPORTANT
DUTY CYCLE
 This device must be operated on a duty cycle. Failure to comply may result in extreme damage to unit and may void warranty.

IMPORTANT
NEVER TOUCH
 any Halogen Lamp with bare fingers. Oil from your fingers will shorten lamp life. Never move fixture until lamp has enough time to cool. Lamps are not covered under warranty.

<i>Specifications</i>	
Beam Spread:	Medium
Lenses:	1 per unit
Beams:	Multi
Bulb:	1 per unit
Lamp:	12V 100W (FCR)
Color:	Multi
Sound Active:	Yes
Fuse:	3 Amp
Power:	120V
Remote Switch:	Green LED "on"= sound active, LED "off"= black out
Duty Cycle:	Continuous
Warranty:	90 Days
Width:	10.5"
Height:	7.5"
Depth:	10"
Package Weight:	18 lbs.
STAR BLAZER System 1- Master Fixture, 3-Slave Fixture, 3-XLR Data cable & 1-Remote Switch	

For service contact your local authorized ODYSSEY dealer or call 626.334.0800


www.ODYSSEYGEAR.com

USER GUIDE

LE-313

STAR BLAZER

ODYSSEY

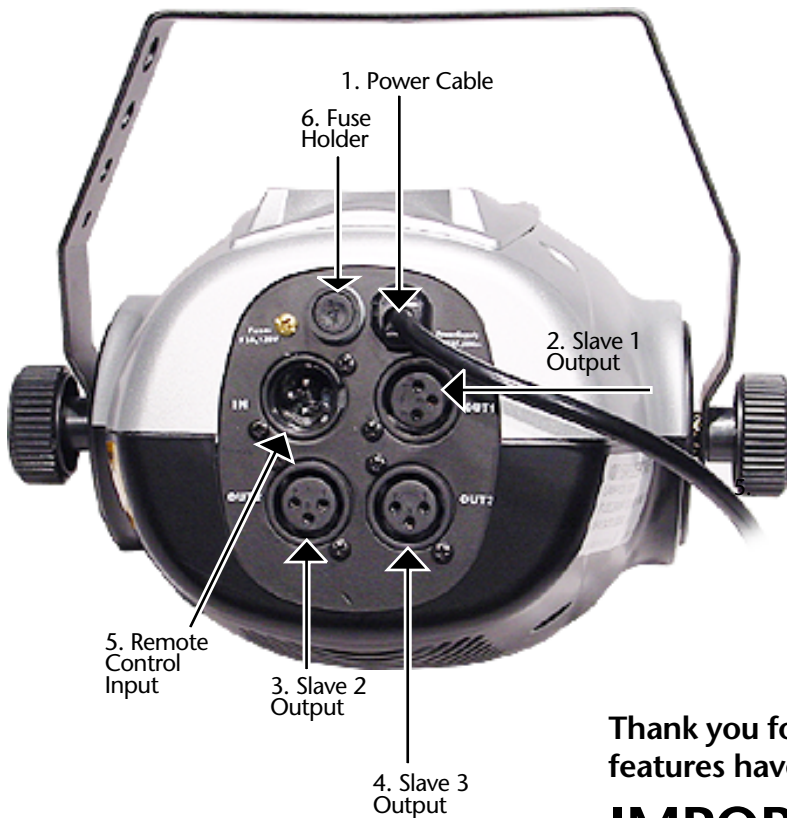

Thank you for choosing Odyssey Lighting. These lighting effect features have preinstalled lamps and are ready to be used.

IMPORTANT!

Please read this User Guide before attempting to operate unit.

USER MANUAL

CONTROLS & FEATURES (master fixture)

- 1. Power cable-** Connect only to a 120V power outlet. Do NOT plug in fixture if the ground prong has been removed or broken off.
- 2. Slave #1 Output-** This output plug will control the operation of any slave unit as slave #1.
- 3. Slave #2 Output-** This output plug will control the operation of any slave unit as slave #2.
- 4. Slave #3 Output-** This output plug will control the operation of any slave unit as slave #3.
- 5. Remote Control Input-** This plug input is designed ONLY for the remote enclosed in the box for this system. (DO NOT plug any other device, any other device will damage the unit and will void the warranty).
- 6. Fuse Holder-** This component holds the 3 amp fuse. When replacing the fuse, always replace with the same exact size and amperage.

SET UP

DATA CABLE REQUIREMENTS

This G-FORCE system includes three standard 3-pin XLR microphone cables for data input and data output. If you require extended lengths, you may use any standard microphone cable. Remember that DMX cable must be daisy chained and can not be split.

SOUND ACTIVE OPERATION

This function allows the G-FORCE to run to the beat of the music without any type of controller.

1. Install or mount your fixtures in a secure/safe manner.
2. Using the XLR cables connect all 3-"slave" units to the rear of the "master" unit.
3. Connect the Control switch to the rear of the "master" unit. The control switch will allow you to activate the sound mode and also blackout all your fixtures.
4. Connect ALL (4) fixtures to 120V AC.
5. Now press the button on the Control switch and the green LED will turn "on". Once the green LED is turned on your G-FORCE system will chase via sound active.

For service contact your local authorized ODYSSEY dealer or call 626.334.0800
www.ODYSSEYGEAR.com

