

**INFORMAL GROUP ON GASEOUS FUEL VEHICLES**

**Within the UN GRPE (WP29)**

**PROPOSED AMENDMENT GFV-08-02**

**Name of Organisation submitting Amendment/Work Item:**

AEGPL

Formatted: Italian (Italy)

Formatted: Italian (Italy)

**Person submitting Item:** Salvatore Piccolo

Assogasliquidi

**Address/phone/email coordinates**

Viale Luigi Pasteur 10

ROMA 00144

Formatted: Italian (Italy)

Italie

Formatted: Italian (Italy)

Work: +39.065.427.3215 / 3218

Fax: +39.065.913.901

Mobile: +39.347.126.89.41

E-Mail: s.piccolo@federchimica.it

**Regulation name and reference number:** Regulation 115

**Name of Amendment/Work Item:**

GE.09-

**UNITED  
NATIONS**

**E**



**Economic and Social  
Council**

Distr.  
GENERAL

ECE/TRANS/WP.29/GRPE/2009/19  
31 March 2009

Original: ENGLISH  
ENGLISH AND FRENCH ONLY

---

**ECONOMIC COMMISSION FOR EUROPE**

INLAND TRANSPORT COMMITTEE

World Forum for Harmonization of Vehicle Regulations

Working Party on Pollution and Energy

Fifty-eighth session  
Geneva, 9-12 June 2009  
Item 6(f) of the provisional agenda

**AMENDMENTS TO UNECE REGULATIONS**

Regulation No. 115  
(Specific LPG and CNG retrofit systems)

Proposal for draft amendments to Regulation No. 115  
(Revision 1)

Submitted by the Chairman of the working group on Gaseous-Fuelled Vehicles<sup>1</sup>

The text reproduced below was prepared by the secretary of the working group on Gaseous-Fuelled Vehicles (GFV) as a revised text of Regulation No. 115 for a better understanding of the

---

<sup>1</sup> In accordance with the programme of work of the Inland Transport Committee for 2006-2010 (ECE/TRANS/166/Add.1, programme activity 02.4), the World Forum will develop, harmonize and update Regulations in order to enhance performance of vehicles. The present document is submitted in conformity with that mandate.

proposed amendments. This proposal includes all amendments up to Amendment 3 and aims at introducing a number of clarifications to the provisions, corrections of errors and improved definitions for retrofit systems. The modifications to the current text of the Regulation are marked in **bold** characters or as strikethrough.

A. PROPOSAL

"Regulation No. 115

Uniform provisions concerning the approval of:

- I. Specific LPG (liquefied petroleum gases) retrofit systems to be installed in motor vehicles for the use of LPG in their propulsion system
- II. Specific CNG (compressed natural gas) retrofit systems to be installed in motor vehicles for the use of CNG in their propulsion system

1. SCOPE

This Regulation applies to:

- 1.1. Part I: Specific LPG retrofit systems to be installed in motor vehicles for the use of LPG in the propulsion system.  
  
Part II: Specific CNG retrofit systems to be installed in motor vehicles for the use of CNG in the propulsion system.
- 1.2. This Regulation applies when the retrofit systems manufacturer keep the initial characteristics of the whole system, for the specific vehicle family for which the approval has been granted.
- 1.3. This Regulation does not apply to the procedures, checks and inspections aimed at verifying the correct installation of the retrofit systems on vehicles, since this matter relies on the competence of the Contracting Party of Country where the vehicle is registered.
- 1.4. This Regulation applies to retrofit systems intended to be fitted on vehicles of categories M and N, with the exception of:
  - (a) **vehicles type-approved pursuant to Regulation No. 83, series of amendments 00 or 01 or 02 or 03 or 04,**
  - (b) **vehicles type-approved pursuant to Regulation No. 49, series of amendments 00 or 01 or 02,**
  - (c) **vehicles type-approved pursuant to EC Directive 70/220/EEC up to and including the amending Directive 96/69/EC as amended by Directive 98/77/CE,**
  - (d) **vehicles type-approved pursuant to EC Directive 88/77/EEC up to and including the amending Directive 96/1/EC.**
  - ~~(a) vehicles approved before the application of the requirements of Regulation No. 83, 01 series of amendments,~~
  - ~~(b) vehicles type approved pursuant to Regulation No. 83, approval A and C,~~
  - ~~(c) vehicles type approved pursuant to Regulation No. 83, others than M<sub>1</sub> and N<sub>1</sub> categories,~~

Deleted: series

Deleted: or 03 series

- ~~(d) vehicles type approved pursuant to Regulation No. 83, series of amendments 01 or 02 or 03 or 04 series,~~  
~~(e) vehicles type approved pursuant to Regulation No. 49, series of amendments 01 or 02 or 03 series.~~

1.5. The requirements for the different categories (M<sub>1</sub>, N<sub>1</sub> or others) are defined in paragraphs 2. to 7. 2/.

Once the retrofit system is installed in the vehicle, the modified vehicle shall fulfil all the provisions of the Regulation for which the type approval has been initially granted.

## 2. DEFINITIONS

2.1. "Approval of an LPG or CNG retrofit system" means the approval of the type of retrofit system to be installed in motor vehicles for the use of LPG or CNG.

2.1.1. Specific LPG retrofit system of an approved type may consist of several components as classified and approved according to Regulation No. 67<sup>3</sup>, Part I and the specific vehicle instruction manuals.

Deleted: , 01 series of amendments,

2.1.2. Specific CNG retrofit system of an approved type may consist of several components as classified and approved according to Regulation No. 110<sup>4</sup>, Part I and the specific vehicle instruction manuals.

2.1.3. "A vehicle is considered mono-fuel", when, after the retrofit operation, it is equipped to operate only on LPG or CNG, or it is equipped to operate on both petrol and LPG or CNG with a petrol tank of capacity ≤ 15 litres, that can only be used to "limp-home".

2.1.4. "A vehicle is considered bi-fuel", when after the retrofit, it is equipped to operate on both petrol and LPG or CNG, with a petrol tank capacity exceeding 15 litres.

---

2/ Regarding safety requirements, it is recommended that the minimum requirements of Regulation No. 67, 01 series of amendments and Regulation No. 110 shall apply to all retrofitted vehicles.

<sup>3</sup> Regulation No 67, series of amendments in force during the type-approval of the retrofit system according to this Regulation

Formatted: Normal

<sup>4</sup> Regulation No 110, series of amendments in force during the type-approval of the retrofit system according to this Regulation

~~2.1.5. "Non intrusive system" means a retrofit system in which the LPG or CNG fuelling system does not change the original air and petrol feed system to the engine.~~

2.156. "Master-slave system" means a retrofit system in which the LPG ECU or CNG ECU is able to translate the petrol ECU control strategy in LPG or CNG operation.

2.1.6. "Original vehicle" means a vehicle before the installation of the retrofit system.

2.2. "Specific LPG or CNG retrofit system of an approved type" means systems, which do not differ in such respect as:

2.2.1. retrofit system manufacturer (responsible for retrofit approval application);

2.2.2. ~~if fuelling by multi-point sequential injection system, pressure regulator/vaporiser with the same maximum gas delivery at the same input pressure and temperature ; if fuelling by other gas fuelling system categories, pressure regulator/vaporiser with the same type-approval number according to Regulation No 67 or Regulation No 110 (or with the same output pressure versus mass flow function at the same input pressure and temperature).~~

Formatted: Indent: Left: 0 cm, Hanging: 1.27 cm

Deleted: type by the same manufacturer

Deleted: ;

~~Comment. In the case of multi-point sequential injection, pressure regulator/vaporizer does not influence emissions that will depend only on the injection system. This is not valid in case of induction mixer, single or multi-point continuous injection systems, for which pressure regulator/vaporizer behaviour has an important impact on emissions. In this last case, we propose to rely on the administrative type if the characterization (output pressure/mass flow) of the pressure regulator/vaporizer is difficult to be corroborated.~~

Formatted: Font: Bold

Formatted: Indent: Left: 1.27 cm

2.2.3. gas fuelling system ~~category~~(i.e. induction mixer, injector device, vapour or liquid, single or multi-point, ~~continuous or sequential,~~ injection system);

Deleted: type by the same manufacturer

Deleted:

Deleted:

Deleted:

2.2.4. sensors and actuators set types;

2.2.5. the fuel container ~~category~~ (i.e. LPG liquid take off / vapour pressure, LPG vapour take off, LPG liquid take off / pressurized by pump, pressurized CNG take off);

Deleted: type

Deleted: the safety devices and fuel container accessories, as required by Regulation No. 67, 01 series of amendments, or Regulation No. 110, where applicable (i.e. relief valve);

~~Comment: the strict connection between the container and the related accessories is well defined and tested according to Regulation No 67/01 and No 110.~~

Formatted: Font: Bold

Formatted: Indent: Left: 2.25 cm

2.2.6. fuel container fitting devices;

Note: With respect to paragraphs 2.2.4., 2.2.5. and 2.2.6., the manufacturer of the retrofit can insert in his installation manual other components, included in the approval, as interchangeable items (see para. 7).

- 2.2.7. ECU (Electronic Control Unit) with the same type-approval number according to Regulation No 67 or Regulation No 110;
- 2.2.8. basic software;
- Comment: different non-emission related settings (i.e. bug fixing, non-emission related sensors settings ...) should not define different software in relation to the checks set in the Regulation.
- 2.2.9. installation manual (see para. 7);
- 2.2.10. end-user manual (see para. 7).
- 2.3. "System manufacturer" means an organization which can assume technical responsibility for the manufacturing of LPG and CNG retrofit systems and can demonstrate that it possesses the features required and the necessary means to achieve quality assessment and conformity of production of the retrofit system.
- 2.4. "Installer" means an organization which can assume technical responsibility for the correct and safe installation of the approved LPG and CNG retrofit system, in conformity with respectively paragraphs 6.1.1.3. and 6.2.1.3. of this Regulation 5/.
- 2.5. For the purposes of this Regulation, "the parent vehicle", with regard both to LPG system and to CNG system, means a vehicle that is selected to act as the vehicle, on which the requirements of this Regulation are going to be demonstrated, and to which the members of a family refer.
- 2.5.1. According to this Regulation, "a member of the family" is a vehicle ~~equipped with retrofit system type of which type approval is requested and~~ sharing the following essential characteristics with its parent ~~vehicle one~~:
- The family definition is based on the original vehicle characteristics.**
- 2.5.1.1. (a) It is produced by the same vehicle manufacturer.  
(b) It is classified in the same category M<sub>1</sub> or M<sub>2</sub> or M<sub>3</sub> or N<sub>1</sub> or N<sub>2</sub> or N<sub>3</sub>.  
Vehicles of category M<sub>1</sub> and N<sub>1</sub> class I may belong to the same family.

Deleted: type by the same manufacturer

Deleted: principles and control strategy

Formatted: Justified, Indent: Left: 0.77 cm

---

5/ In the bounds of the legislative power of the Contracting Party, as stated in paragraph 1.3. of this Regulation, in order to ensure a proper qualification of the installer, it is recommended to require valid certificates, issued by the system manufacturer and/or by skilled organizations, attesting the personnel's necessary expertise and the workshop's suitability to carry out retrofit system's installation.

- (c) It ~~was type-approved according~~ to the same emission limits or those ~~in force earlier~~<sup>6</sup>.
- (d) If the gas fuelling system has a central metering for the whole engine: it has an approved power output between 0.7 and 1.15 times that of the engine of the parent vehicle. If the gas fuelling system as an individual metering per cylinder: it has an approved power output per cylinder between 0.7 and 1.15 times that of the engine of the parent vehicle.
- (e) Fuel feed and combustion process (injection: direct or indirect, single-point or multi-point).
- (f) It has the same pollution control system:
  - (i) same type of catalyst if fitted (three-way, oxidation, de NO<sub>x</sub>)
  - (ii) air injection (with or without)
  - (iii) exhaust gas recirculation (EGR) (with or without)If the tested vehicle was not equipped with air-injection or EGR, engines with these devices are allowed.

**Deleted:** is subject

**Deleted:** specified in earlier series of amendments of the applicable Regulation.

2.5.1.2. With regard to the requirement of paragraph 2.5.1.1.(a), the vehicle family can also cover vehicles produced by other vehicle manufacturers if it can be demonstrated to the type approval authority that the same engine type ~~is used~~.

**Deleted:** and emission strategy

- 2.5.1.3. With regard to requirement of paragraph 2.5.1.1.(d):
- (a) in the case of a central metering for the whole vehicle where a demonstration shows that two gas fuelled vehicles could be members of the same family with the exception of their approved power output, respectively P1 and P2 ( $P1 < P2$ ), and both are tested as if they were parent vehicles, the family relation will be considered valid for any vehicle with an approved power output between  $0.7*P1$  and  $1.15*P2$ ;
  - (b) in the case of an individual metering per cylinder where a demonstration shows two gas fuelled vehicles could be members of the same family with the exception of their approved power output, respectively P1 and P2 ( $P1 < P2$ ), and both are tested as if they were parent vehicles, the family relation will be considered valid for any vehicle with an approved power output between  $0.7*P1$  and  $1.15*P2$ .

2.5.1.4. With regard to the requirement of paragraph 2.5.1.1.(f) in case of a "master-slave" system, as defined in paragraph 2.1.6., the family relation will be considered valid regardless of the presence of the air injection or the EGR.

2.6. For definitions of the components of LPG retrofit systems refer to Regulation No. 67<sup>3</sup>.

**Deleted:** ,

**Deleted:** 01 series of amendments.

<sup>6</sup> According to Regulation 83 series of amendments or Directive amending Directive 70/220/EEC or Regulation 692/2008 implementing Regulation 715/2007 under which the initial type-approval of the vehicle with regard to pollutant emission was granted.



2.7. For definitions of the components of CNG retrofit systems refer to Regulation No. 110<sup>4</sup>.

### 3. APPLICATION FOR APPROVAL

3.1. The application for approval of a specific retrofit system shall be submitted by the manufacturer or by his duly accredited representative.

3.2. It shall be accompanied by the under-mentioned documents in triplicate and by the following details:

3.2.1. Description of the retrofit system comprising all the relevant details, included the approval numbers of each component, referred to in item 2 of Annex 3A to this Regulation for LPG system and Annex 3B to this Regulation for CNG system;

Formatted: Font: Bold

3.2.2. Description of the parent vehicle(s) on which the requirements of this Regulation are going to be tested comprising all the relevant details referred to in item 1 of Annex 3A to this Regulation for LPG system and Annex 3B to this Regulation for CNG system;

Formatted: Font: (Default) Times New Roman, 12 pt, Not Bold, Not Italic, Font color: Auto, English (U.K.)

Formatted: Font: (Default) Times New Roman, 12 pt, Not Bold, Not Italic, Font color: Auto, English (U.K.)

3.2.3. Description of vehicles for which the retrofit system is proposed to be qualified comprising all the relevant details referred to in item 3 of Annex 3A to this Regulation for LPG system and Annex 3B to this Regulation for CNG system."

Formatted: Indent: Left: 0 cm, Hanging: 2.25 cm, Automatically adjust right indent when grid is defined, Space After: 0 pt, No widow/orphan control, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tabs: -2 cm, Left + 0 cm, Left + 2.25 cm, Left + 4.7 cm, Left + 11.22 cm, Left + 11.8 cm, Left + 12.7 cm, Left + 13.97 cm, Left + 15.24 cm, Left + 16.51 cm, Left

Comment: Aegpl agrees to insert the description of the vehicles for which the system is proposed to be qualified, but creating a new ad-hoc item 3. This item will contain all the details that are necessary for the qualification of the vehicle as a member of family (see amendment proposals to Annex 3A, item 1). In other words, Aegpl proposes to restrict the quantity of information to be provided for non-parent vehicle to the data related to paragraph 2.5.1.1.

Formatted: Font: (Default) Times New Roman, 12 pt, Not Bold, Not Italic, Font color: Auto, English (U.K.)

3.2.4. Description of all modifications applied to the original parent vehicle,

~~3.2.5. If needed for the purpose of paragraph 5.2., notice of approval of the retrofit system for a parent vehicle which is different from those the approval is applied for, certifying that the retrofit system has been approved as a "non intrusive" system, as defined in paragraph 2.1.5.~~

Formatted: Font: (Default) Times New Roman, 12 pt, Not Bold, Font color: Auto, English (U.K.)

Formatted: English (U.S.)

Deleted: 3.

3.2-6.5 If needed for the purpose of paragraph 5.3.2., notice of approval of the retrofit system for a parent vehicle which is different from those the approval is applied for, certifying that the retrofit system has been approved as a "master-slave" system, as defined in paragraph 2.1.6.5.

Deleted: , only in case of bi-fuel configuration,¶

Deleted: 3.2.4. . Verification of compliance with the specifications prescribed in paragraph 6 of this Regulation,¶

3.3. Installation manual(s) for the retrofit system installation on the parent vehicle(s).

3.4. End-user manual.

3.5. A sample of the specific retrofit system, properly installed in the parent vehicle(s).

#### 4. MARKINGS

4.1. The sample(s) of a specific retrofit system submitted to type approval shall be accompanied by a plate with the trade name or mark of the retrofit manufacturer and the type, as indicated in Annexes 2A and 2B.

4.2. All retrofit systems, installed in the vehicle belonging to the family, as defined in paragraph 2., shall be identified by a plate, in which the approval number, and the technical specifications, as required in Annexes 2A and 2B shall be placed. This plate has to be permanently fixed to the structure of the vehicle and shall be clearly readable and indelible.

#### 5. APPROVAL

5.1. If the retrofit system sample submitted for approval meets the requirements of paragraph 6. of this Regulation, the type approval of the retrofit system shall be granted.

~~5.2. Retrofit systems, which have already been approved as "non intrusive" systems on at least one parent vehicle, do not need to comply with paragraph 6.1.2.2. or 6.2.2.2. of this Regulation.~~

~~5.3.2.~~ Retrofit systems, which have already been approved as "master-slave" systems on at least one parent vehicle, do not need to comply with paragraph 6.1.4.4.2.1. or 6.2.4.4.2.1. of this Regulation.

5.4.3. An approval number shall be assigned to each type of the retrofit system approved. Its first two digits (at present 00 according to the Regulation in its original form) shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party shall not assign the same type approval number to another type of retrofit system.

5.5.4. Notice of approval or of refusal of approval of a retrofit system type/part pursuant to this Regulation shall be communicated to the Parties to the Agreement applying this Regulation, by means of a form conforming to the model in Annexes 1A and 1B to this Regulation.

Deleted: or of extension

5.6.5. An international approval mark shall be affixed in the plate as indicated in

Annexes 2A and 2B, to all retrofit systems, conforming to a type approved under this Regulation, in addition to the mark prescribed in this paragraph 4.1. This approval mark shall consist of:

- 5.6.5.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted the approval 7/.
- 5.6.5.2. The number of this Regulation, followed by the letter "R", a dash and the approval number to the right of the circle defined in paragraph 5.4.1. The approval number consists of the retrofit system type approval number, which appears in the communication form for this type (see paragraph 5.2. and Annexes 1A and 1B) preceded by two figures indicating the latest series of amendments to this Regulation.
- 5.7.6. The approval mark shall be clearly readable and be indelible.
- 5.8.7. Annexes 2A and 2B to this Regulation give examples of the arrangement of the aforesaid plate with approval mark.

## 6. SPECIFICATIONS REGARDING THE RETROFIT SYSTEMS

### 6.1. PART I - LPG retrofit system specifications:

- 6.1.1. Requirements for the installation of specific retrofit system for the use of LPG in the propulsion system of a vehicle

Deleted: equipment

---

7/ 1 for Germany, 2 for France, 3 for Italy, 4 for the Netherlands, 5 for Sweden, 6 for Belgium, 7 for Hungary, 8 for the Czech Republic, 9 for Spain, 10 for Serbia and Montenegro, 11 for the United Kingdom, 12 for Austria, 13 for Luxembourg, 14 for Switzerland, 15 (vacant), 16 for Norway, 17 for Finland, 18 for Denmark, 19 for Romania, 20 for Poland, 21 for Portugal, 22 for Russian Federation, 23 for Greece, 24 for Ireland, 25 for Croatia, 26 for Slovenia, 27 for Slovakia, 28 for Belarus, 29 for Estonia, 30 (vacant), 31 for Bosnia and Herzegovina, 32 for Latvia, 33 (vacant), 34 for Bulgaria, 35 (vacant), 36 for Lithuania, 37 for Turkey, 38 (vacant), 39 for Azerbaijan, 40 for The former Yugoslav Republic of Macedonia, 41 (vacant), 42 for the European Community (Approvals are granted by its Member States using their respective ECE symbol), 43 for Japan, 44 (vacant), 45 for Australia, 46 for Ukraine, 47 for South Africa, **48 for New Zealand, 49 for Cyprus, 50 for Malta, 51 for the Republic of Korea, 52 for Malaysia, 53 for Thailand, 54 and 55 (vacant), 56 for Montenegro, 56 (Vacant) and 58 for Tunisia.** Subsequent numbers shall be assigned to other countries in the chronological order in which they ratify the Agreement Concerning the Adoption for Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approval Granted on the Basis of these Prescriptions, and the numbers, and the numbers thus assigned shall be communicated by the Secretary-General of the United Nations to the Contracting Parties to the Agreement.

6.1.1.1. An LPG retrofit system shall consist at least of the following components:

6.1.1.1.1. Components indicated in Regulation No. 67<sup>3</sup> and defined as necessary,

Deleted: , 01 series of amendments

6.1.1.1.2. Installation manual,

6.1.1.1.3. End-user manual.

6.1.1.1.4. The plate referred to in Annex 2A

6.1.1.2. The LPG retrofit system may also include components indicated as optional in Regulation No. 67<sup>3</sup>.

Deleted: , 01 series of amendments.

6.1.1.3. The LPG retrofit system installed in the vehicle, in a proper way as defined in the above installation manual, shall comply with the installation requirements of Regulation No. 67<sup>3</sup>. Concerning the fixation of the fuel container, the requirements of Regulation No. 67<sup>3</sup> shall be deemed to be met if the requirements of Annex 5 to the present Regulation are satisfied.

Deleted: , 01 series of amendments

Deleted: , 01 series of amendments

6.1.2. Pollutants emissions and CO<sub>2</sub> emissions (for category M<sub>1</sub> and N1 vehicles only)

6.1.2.1. One LPG retrofit system sample, as described in paragraph 2. of this Regulation, installed into the parent vehicle(s), as described in paragraph 2. of this Regulation, shall be submitted to the test procedures described in paragraphs 6.1.2.4. to 6.1.2.5.

Deleted: Regulations No. 83 4/ and No. 101, or No. 49 5/, where applicable, in the limits of the requirements of paragraphs 6.1.2.~~5.4.~~ and 6.1.2.~~6.5.~~ The vehicles and/or the engines are also submitted to a maximum power comparison test, as described in Regulation No. 85 for engines, or defined in paragraph 6.1.3. below for vehicles.

~~6.1.2.2. In order to prove that the retrofit system is "non-intrusive", as defined in paragraph 2.1.5., the system manufacturer shall provide data and/or engineering evaluations which adequately demonstrate that the original air and petrol feed system to the engine is not affected by the installation of the retrofit system.~~

6.1.2.~~3.2.~~ Fuel requirements by the engine: the type of fuel normally used by the engine could be:

- (a) LPG only (**mono-fuel**)
- (b) both unleaded petrol or LPG (**bi-fuel**)

(c) both diesel fuel or diesel fuel and LPG (**dual fuel**)  
(Provisions for dual fuel have still to be defined).

- 6.1.2.4.3. "Pollutants" means those prescribed in the initial type-approval of the vehicle.
- 6.1.2.5.4. Exhaust emissions and CO<sub>2</sub> emissions (M<sub>1</sub> and N<sub>1</sub> category of vehicles):
- 6.1.2.5.4.1. Specific requirements on the Type I test (verifying the average exhaust emissions after a cold start):
- 6.1.2.5.4.1.1. ~~Three Tests~~ shall be performed according to the procedures set in the initial type-approval of the vehicle<sup>8</sup>, on each parent vehicle with each fuel:
- (i) reference petrol,
  - (ii) reference LPG A,
  - (iii) reference LPG B.

**Deleted:** :

**Deleted:** (i) carbon monoxide<sup>¶</sup>  
 (ii) hydrocarbons assuming a ratio:<sup>¶</sup>  
 . . . CH<sub>1,85</sub> . for petrol,<sup>¶</sup>  
 . . . CH<sub>1,86</sub> . for diesel fuel,<sup>¶</sup>  
 . . . CH<sub>2,52</sub> . for LPG,<sup>¶</sup>  
 . . . CH (to be defined) . for dual fuel.<sup>¶</sup>  
 (iii) oxides of nitrogen, the latter being expressed in nitrogen dioxide (NO<sub>2</sub>) equivalent.<sup>¶</sup>  
 (iv) particulates, etc.

**Deleted:** as defined in Regulation No. 83, 05 series of amendments (for vehicles having the maximum mass not exceeding 3,500 kg):

**Deleted:** ~~m~~Measurements

**Deleted:** of tailpipe emissions

**Deleted:** after a cold start

**Deleted:**

**Deleted:** The emissions of CO, HC, and NO<sub>x</sub> ~~and HC + NO<sub>x</sub>~~ are calculated according Regulation No. 83. 4<sup>¶</sup>

**Deleted:** factors/

6.1.2.4.1.2. Setting of the dynamometer

With the agreement of the type approval authority, one of the following methods may be used:

6.1.2.4.1.2.1. Using of coast-down coefficients of the original vehicle<sup>8</sup>:

In case coast-down coefficients of the original vehicle used during the type approval are used, the following conditions shall apply:

- (a) the parent vehicle reference mass shall be measured with the retrofit system installed on the vehicle including the LPG container fully filled up (80% of the capacity) or shall be calculated as the sum of the original vehicle reference mass and the mass of the retrofit system with the LPG container fully filled up (80% of the capacity),
- (b) the inertia mass of the parent vehicle shall be determined according to the reference mass of the retrofitted vehicle,
- (c) the rolling resistance of the parent vehicle shall correspond to the original vehicle value proportionally adjusted to the parent vehicle mass measured or calculated as above:

**Deleted:** tank

**Deleted:** tank

$$F0' = f0 + (abs(f0))*(p/m)$$

<sup>8</sup> Coast-down coefficients of original vehicles pursuant to Regulation (CE) No 715/2007 can be obtained according to the requirements of article 6, paragraph 6, of the foresaid Regulation, following the procedures set in Annex XIV, paragraph 2.6., of Commission Regulation (CE) No 692/2008.

**Formatted:** Justified

Where:

F'0= rolling resistance of the parent vehicle

f0= rolling resistance of the original vehicle

m=reference mass of the original vehicle

p= retrofit system mass

- (d) the other coefficients of the resistance of the parent vehicle shall be equal to that of the original vehicle.

6.1.2.4.1.2.2. Using of the table values:

- (a) the parent vehicle reference mass shall be measured with the retrofit system installed on the vehicle including the LPG container fully filled up (80% of the capacity) or shall be calculated as the sum of the original vehicle reference mass and the mass of the retrofit system with the LPG container fully filled up (80% of the capacity),
- (b) the inertia mass of the parent vehicle shall be determined according to the reference mass of the retrofitted vehicle,
- (c) the coefficient a shall be the one corresponding to the reference mass of the retrofitted vehicle,
- (d) the coefficient b shall be the one corresponding to the reference mass of the original vehicle.

Deleted: tank

Deleted: tank

~~6.1.2.5.1.2. The test vehicle(s) equipped with the retrofit system, and with the reference petrol, shall comply with the limit values according to the type approval of the vehicle(s) including the deterioration factors applied during the type approval of the vehicle(s).~~

~~This condition is deemed to be met if the emissions values for each pollutant or combination of pollutants obtained in each test with reference petrol are less than the limits.~~

~~However, one of the three test values obtained may exceed, by not more than 10 per cent, the limit prescribed, provided that the arithmetical mean of the three values is below this limit.~~

~~Where the prescribed limits are exceeded for more than one pollutant or combination of pollutants, it is immaterial whether this occurs in the same test or different tests.~~

6.1.2.5.4.1.3. Subject to the requirements of paragraph 6.1.2.4.1.5., the tests shall be repeated three times using reference petrol. The parent vehicle(s), equipped with the retrofit system, shall comply with the limit values according to the type approval of the original vehicle(s) including the deterioration factors applied during the type approval of the original vehicle(s).

~~The requirements regarding emissions of the vehicle(s) equipped with the~~

~~retrofit system, and with the two reference gases, shall be deemed to be fulfilled if the results meet the following conditions for each regulated pollutant (CO, HC + NO<sub>x</sub>) or (CO, HC, NO<sub>x</sub>) according to the requirements the petrol parent vehicle had to comply with at the date of its approval:~~

- ~~(1)  $(MA + MB)/2 < 0.85S + 0.4G$   
(2)  $MA$  and  $MB < G$~~

~~where:~~

~~MA: mean value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>)  $\frac{4}{4}$  or the sum of two pollutants (HC + NO<sub>x</sub>) obtained from the three Type I tests with the retrofit system and with LPG A,~~

~~MB: mean value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>)  $\frac{4}{4}$  or the sum of two pollutants (HC + NO<sub>x</sub>) obtained from the three Type I tests with the retrofit system and with LPG B,~~

~~S: mean value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>)  $\frac{4}{4}$  or the sum of two pollutants (HC + NO<sub>x</sub>) obtained from the three Type I tests with the reference petrol,~~

~~G: limit value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>)  $\frac{4}{4}$  or the sum of two pollutants (HC + NO<sub>x</sub>) according to the type approval of the vehicle(s) divided by the deterioration factors.~~

6.1.2.5.4.1.4. Notwithstanding the requirements of paragraph 6.1.2.4.1.3., for each pollutant or combination of pollutants, one of the three test results may exceed, by not more than 10 per cent, the limit prescribed, provided that the arithmetical mean of the three results is below the prescribed limit. Where the prescribed limits are exceeded for more than one pollutant, it is immaterial whether this occurs in the same test or in different tests.

~~Notwithstanding the provisions of paragraphs 6.1.2.5.1.1. to 6.1.2.5.1.3., for non-intrusive retrofit system as defined in paragraph 2.1.5., the Type I test shall be carried out only with each LPG reference fuel.~~

6.1.2.4.1.5. The number of emission tests prescribed in paragraph 6.1.2.4.1.3. may be reduced under the following conditions:

- (a) one test is required if the result obtained for each pollutant subject to limitation is less than or equal to 0.7 the emission limit (i.e.  $V1 \leq 0.70 G$ ),  
(b) two tests are required if, for each pollutant subject to limitation the following requirements are met:

$$V1 \leq 0.85 G \text{ and } V1 + V2 \leq 1.70 G \text{ and } V2 \leq G$$

where:

V1: value of the emission of one pollutant obtained from the first test of the Type I performed;

- V2:** value of the emission of one pollutant obtained from the second test of the Type I performed;
- G:** limit value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>) according to the type approval of the vehicle(s) divided by the deterioration factors.

**6.1.2.4.1.6** Subject to the requirements of paragraph 6.1.2.4.1.8., the tests shall be repeated three times with each reference LPG. The parent vehicle, equipped with the retrofit system, shall comply with the limit values according to the type approval of the original vehicle(s) including the deterioration factors applied during the type approval of the original vehicle(s).

If the parent vehicle complies with Regulation No. 83, 05 series of amendments, or with Directive 98/69/EC, or with Regulation No. 49, 04 series of amendments, or with Directive 1999/96/EC, the vehicle shall not use petrol for more than a maximum of 90 seconds during each test.

For vehicles complying with later series of amendments to Regulations Nos. 83 and 49, or later amending Directives or European Regulations, this period shall not exceed 60 seconds.

~~6.1.2.5.1.4.1. Subject to the requirements of paragraph 6.1.2.5.1.4.2. the tests shall be repeated three times.~~

~~The test vehicle(s) with each reference LPG shall comply with the limits values according to the type approval of the vehicle(s) including the deterioration factors applied during the type approval of the vehicle(s).~~

**6.1.2.4.1.7.** Notwithstanding the requirements of paragraph 6.1.2.4.1.6., for each pollutant or combination of pollutants, one of the three test results may exceed, by not more than 10 per cent, the limit prescribed, provided that the arithmetical mean of the three results is below the prescribed limit. In this case the prescribed limits may be exceeded for more than one pollutant in the same test or in different tests.

**6.1.2.4.1.8.** The number of emission tests prescribed in paragraph 6.1.2.4.1.6. on each LPG reference fuel may be reduced under the following conditions:

- (a) one test is required if the result obtained for each pollutant or for the combined emission of two pollutants subject to limitation is less than or equal to 0.7 the emission limit (i.e.  $M1 \leq 0.70 G$ ),
- (b) two tests are required if, for each pollutant or for the combined emission of two pollutants subject to limitation the following requirements are met:

$$M1 \leq 0.85 G \text{ and } M1 + M2 \leq 1.70 G \text{ and } M2 \leq G$$

where:



- M1: value of the emission of one pollutant obtained from the first test of the Type I performed,  
M2: value of the emission of one pollutant obtained from the second test of the Type I performed,  
G: limit value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>) or the sum of two pollutants (HC + NO<sub>x</sub>) according to the type approval of the vehicle(s) divided by the deterioration factors.

6.1.2.5.4.2. Specific requirements on the Type II test (carbon monoxide emission test at idling speed) for vehicles having a maximum mass exceeding 3,500 kg:

6.1.2.5.4.2.1. One LPG retrofit system sample, as described in paragraph 2. of this Regulation, installed into the parent vehicle, as described in paragraph 2. of this Regulation, shall be submitted to the Type II test procedures described in Regulation No. 83.

6.1.2.5.4.2.2. **Notwithstanding the provisions of Annex 5 of Regulation No. 83, 05 series of amendments, the Type II test shall be performed at the request of the system manufacturer with only one LPG reference fuel chosen at the discretion of the type approval technical service responsible for the test.**

6.1.2.5.4.3. Calculation of the CO<sub>2</sub> emissions and fuel consumption (for M1 and N1 category of vehicles).

6.1.2.5.4.3.1. Tests shall be performed together with those specified in paragraph 6.1.2.4. according to the test procedures in force during the initial type-approval of the vehicle<sup>9</sup> on each parent vehicle with the following fuels, if applicable:

- (i) reference petrol.
- (ii) reference LPG A.
- (iii) reference LPG B.

The dynamometer setting shall be that specified in paragraph 6.1.2.4.2.

The mean of CO<sub>2</sub> emissions shall be calculated as follows:

$$CO_{2LPG} = 1/n \sum_{i=1}^n (CO_{2Ai} + CO_{2Bi}) / 2$$

<sup>9</sup> According to Regulation No. 101 series of amendments or Directive amending Directive 80/1268/EEC or Regulation amending Regulation 692/2008 implementing Regulation 715/2007 under which the initial type-approval of the vehicle with regard to CO<sub>2</sub> emissions and fuel consumption was granted.

**Formatted:** Font: (Default)  
Times New Roman, 12 pt, Font  
color: Auto, English (U.S.)

**Formatted:** Justified, Indent:  
Left: 0 cm, Hanging: 2.5 cm,  
Automatically adjust right  
indent when grid is defined, No  
widow/orphan control, Adjust  
space between Latin and Asian  
text, Adjust space between  
Asian text and numbers, Tabs:  
2.5 cm, Left + 3.25 cm, Left +  
3.5 cm, Left + 4 cm, Left +  
4.7 cm, Left + 5 cm, Left +  
11.22 cm, Left + 11.8 cm, Left  
+ 12.7 cm, Left + 13.97 cm,  
Left + 15.24 cm, Left + 16.51  
cm, Left

**Formatted:** Font: (Default)  
Times New Roman, 12 pt, Font  
color: Auto, English (U.S.)

**Formatted:** Font: (Default)  
Times New Roman, 12 pt, Font  
color: Auto, English (U.S.)

**Deleted:** The emissions of CO<sub>2</sub>  
are calculated according to  
Regulation No. 101 for each parent  
vehicle, if applicable.¶

**Formatted:** Font: (Default)  
Times New Roman, 12 pt, Font  
color: Auto, English (U.S.)

$$CO_{2\text{petrol}} = 1/n \sum_{i=1}^n CO_{2\text{petrol},i}$$

where:

- i: number of parent vehicles (i = 1 to n)  
CO<sub>2Ai</sub>: mean value of the emissions of CO<sub>2</sub> obtained from the three Type I tests with the retrofit system and with LPG A for vehicle No. i,  
CO<sub>2Bi</sub>: mean value of the emissions of CO<sub>2</sub> obtained from the three Type I tests with the retrofit system and with LPG B for vehicle No. i;  
CO<sub>2petrol,i</sub>: mean value of the emissions of CO<sub>2</sub> obtained from the three Type I tests with reference petrol for vehicle No. i.

6.1.2.5.4.3.2. The mean fuel consumption shall be calculated in the same way as for the mean of CO<sub>2</sub> emissions, as defined in paragraph 6.1.2.5.3.1.

6.1.2.5.4.3.3. The ratios of CO<sub>2</sub> emissions and fuel consumption shall be calculated as follows:

$$K_{CO_2} = CO_{2LPG} / CO_{2\text{petrol}}$$

$$K_{\text{Cons}} = \text{Cons}_{LPG} / \text{Cons}_{\text{petrol}}$$

For each vehicle of the family, the official values of CO<sub>2</sub> emissions are multiplied by the above ratios.

~~6.1.2.5.3.4. Notwithstanding the provisions of paragraphs 6.1.2.5.3.1. and 6.1.2.5.3.2., for non-intrusive system, as defined in paragraph 2.1.5. of this Regulation, the value of the petrol CO<sub>2</sub> emission and the fuel consumption may be the official values of the vehicle No. i.~~

6.1.2.6.5. Exhaust emissions (M<sub>2</sub>, M<sub>3</sub>, N<sub>2</sub> and N<sub>3</sub> categories of vehicles)

**This paragraph is reserved for the specific requirements for emissions of diesel engines approved according to Regulation No. 49 and equipped with a retrofit LPG system (dual fuel) if required.**

~~The parent engine(s) are submitted to the tests indicated in Regulation No. 49 5 as follows:~~

~~Measurements of emissions in the 13-mode cycle with each fuel:~~

~~(i) reference diesel fuel,~~

---

~~5 According to Regulation No. 49, the series of amendments in force during the initial type approval of the engine.~~

~~(ii) reference diesel fuel and LPG.~~

~~The emissions of CO, HC, NO<sub>x</sub> and particulates are calculated according to Regulation No. 49 5/.~~

~~The test engine(s) with the reference diesel fuel shall comply with the limit values according to the type approval of the engine(s) applied during the type approval.~~

~~The requirements regarding emissions of the engine(s) equipped with the retrofit system, and with the LPG, shall be deemed to be fulfilled if the results meet for each regulated pollutant (CO, HC, NO<sub>x</sub> and particulates) the following conditions:~~

~~(1)  $M < 0.85S + 0.4G$~~

~~(2)  $M < G$~~

~~M: value of the emissions of one pollutant obtained from the 13 mode test with the retrofit system and with LPG,~~

~~S: value of the emissions of one pollutant obtained from the 13 mode test with the reference diesel fuel,~~

~~G: limit value of the emissions of one pollutant according to the type approval of the engine(s)~~

### 6.1.3. Power requirements

The parent vehicle(s) or engine(s) are submitted to the tests as follows:

**6.1.3.1. One LPG retrofit system sample as described in paragraph 2. of this Regulation, installed in the parent vehicle(s) or on the parent engine(s) shall be submitted to the test procedures of paragraph 6.1.3.2. or 6.1.3.3. The measured engine power with LPG shall be lower than that measured with petrol + 5 per cent.**

6.1.3.2. Chassis dynamometer method:

The maximum engine power at the roller, is measured on a chassis dynamometer on each parent vehicle with the following fuels:

- (i) reference petrol,
- (ii) reference LPG A or B,

The reference fuels shall be those used during the type-approval of the retrofit system.

**Deleted:** wheels

**Formatted:** Font: (Default)  
Times New Roman, 12 pt, Font  
color: Auto, English (U.S.)

**Formatted:** Justified, Indent:  
Left: 2.5 cm, Automatically  
adjust right indent when grid is  
defined, No widow/orphan  
control, Adjust space between  
Latin and Asian text, Adjust  
space between Asian text and  
numbers, Tabs: 2.5 cm, Left

**Formatted:** Font: (Default)  
Times New Roman, 12 pt, Font  
color: Auto, English (U.S.)

The mean of power measurements shall be calculated as follows:

$$\text{Power}_{\text{petrol}} = 1/n \sum_{i=1}^n \text{Power}_{\text{petrol}.i}$$

$$\text{Power}_{\text{LPG}} = 1/n \sum_{i=1}^n \text{Power}_{\text{LPG}.i}$$

where:  
i - number of parent

vehicles (i = 1 to n),

Power<sub>petrol</sub> - mean value of maximum power measured with petrol,

Power<sub>LPG</sub> - mean value of maximum power measured with LPG.

**Formatted:** Font: (Default) Times New Roman, 12 pt, Font color: Auto, English (U.K.)

**Formatted:** Justified, Indent: Hanging: 0.05 cm, Automatically adjust right indent when grid is defined, No widow/orphan control, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

**Formatted:** Font: (Default) Times New Roman, 12 pt, Font color: Auto, English (U.K.)

The ratio of engine power shall be calculated as follows:

$$K_{\text{power}} = \text{Power}_{\text{LPG}} / \text{Power}_{\text{petrol}}$$

For each vehicle of the family, the official values of engine power are multiplied by the above ratio.

#### 6.1.3.3. Engine dynamometer method:

The maximum power at the crankshaft is measured on an engine dynamometer according to Regulation No. 85<sup>10</sup> for each parent vehicle(s) with the following fuels:

- (i) commercial petrol,
- (ii) commercial LPG,

**Deleted:** or diesel fuel

**Formatted:** English (U.K.)

The mean of power measurements shall be calculated as follows:

$$\text{Power}_{\text{petrol}} = 1/n \sum_{i=1}^n \text{Power}_{\text{petrol}.i}$$

$$\text{Power}_{\text{LPG}} = 1/n \sum_{i=1}^n \text{Power}_{\text{LPG}.i}$$

**Formatted:** Default Paragraph Font

**Formatted:** Automatically adjust right indent when grid is defined, No widow/orphan control, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tabs: 0 cm, Left + 4.7 cm, Left + 11.22 cm, Left + 11.8 cm, Left + 12.7 cm, Left + 13.97 cm, Left + 15.24 cm, Left + 16.51 cm, Left

<sup>10</sup> According to Regulation No. 85, the series of amendments in force during the type approval of the retrofit system according to this Regulation.

**Formatted:** Font: (Default) Times New Roman, 12 pt, Not Bold, Font color: Auto, English (U.K.), Not Superscript/ Subscript

where:

i - number of parent vehicles (i = 1 to n),

Power<sub>petrol</sub> - mean value of maximum power measured with petrol,

Power<sub>LPG</sub> - mean value of maximum power measured with LPG.

Formatted: Indent: First line:  
0 cm

The ratio of engine power shall be calculated as follows:

$$K_{\text{power}} = \text{Power}_{\text{LPG}} / \text{Power}_{\text{petrol}}$$

For each vehicle of the family, the official values of engine power are multiplied by the above ratio.

~~6.1.3.4. Notwithstanding the provisions of paragraph 6.1.3.1., with regard to the way to calculate the mean of maximum power on petrol in paragraphs 6.1.3.2. and 6.1.3.3., for non-intrusive system, as defined in paragraph 2.1.5. of this Regulation, the value of maximum power on petrol of the vehicle No. i may be the official value.~~

6.1.4. OBD requirements and tests for vehicles retrofitted with LPG retrofit system.

6.1.4.1. For the purposes of this paragraph, the following definitions apply:

6.1.4.1.1. "original emission-related component" means any component in the air inlet, exhaust or evaporative system which supplies an input to or receives an output from the petrol controller.

6.1.4.1.2. "LPG emission-related component" means any component in the air inlet or in the exhaust system which supplies an input to or receives an output from the LPG controller.

6.1.4.2. In the case that there is a need, to fit properly the LPG retrofit system in the vehicle, it is allowed to simulate the right operation of the original emission-related components which are not in use on LPG mode.

6.1.4.3. The LPG retrofit system, as described in paragraph 2. of this Regulation, installed into the parent vehicle(s), shall comply with the requirements and tests in force with regard to OBD during the initial type-approval of the vehicle<sup>6</sup> on both petrol and LPG modes. Tests shall be performed on one parent vehicle only and, in the case of LPG, with one of the reference LPG A or B.

Deleted: of Annex 11 of  
Regulation No. 83, 05 series of  
amendments

6.1.4.4. Specific OBD requirements and tests for "master-slave" retrofit system:

6.1.4.4.1. Notwithstanding the requirements of the paragraph 6.1.4.3., a "Master-slave" retrofit system shall fulfil the following requirements:

- (a) The petrol ECU shall remain activated for engine management in both petrol and LPG modes
- (b) during petrol operations the petrol OBD system shall remain the only on-board diagnostic system of the vehicle
- (c) during LPG operations the petrol OBD system shall continue to monitor original emission related components with the exception of those which are not in use
- (d) during LPG operations the LPG ECU shall only monitor for the LPG emission-related components as well as their electrical connections;

6.1.4.4.2. Notwithstanding the requirements of paragraph 6.1.4.3., the LPG retrofit system shall be submitted to the following tests, which, in the case of Type I tests, shall be performed according to procedures in force during the initial type-approval of the vehicle<sup>6</sup>.

Deleted: Annex 11, Appendix 1, of Regulation No. 83, 05 series of amendments.

6.1.4.4.2.1. The following tests shall be carried out on one parent vehicle, equipped with the LPG retrofit system:

- (a) the LPG ECU shall follow the petrol ECU on fuel strategies (e.g. injection). This can be demonstrated by a monitoring (diagnostic) programme, while modifying the signal of one of the petrol system's sensors with an impact on the injection time,
- (b) during a Type I test on petrol the original MI shall activate due to the electrical disconnection of any original emission-related component,
- (c) during a Type I test on LPG the original MI shall activate due to the electrical disconnection of any original emission-related component, which is in use during LPG operations.

6.1.4.4.2.2. The following tests shall be carried out on the parent vehicle(s), equipped with the LPG retrofit system, only on LPG operating mode:

- (a) during a Type I test, electrical disconnection of one LPG emission-related component,
- (b) during a Type I, test replacement of one LPG emission-related component with a deteriorated and defective one or electronic simulation of such a failure.

The original MI or automatic switch from LPG mode to petrol mode shall activate before the end of the tests under any of the conditions above.

6.1.4.4.2.3. Fault codes due to malfunctions of the LPG emission-related components and their electrical connections shall be stored in the LPG ECU.

6.1.4.4.2.4. The system manufacturer shall provide specific instructions as to read out the LPG fault codes referred to in paragraph 6.1.4.4.2.3.

6.2. PART II - CNG retrofit system specifications:

- 6.2.1. Requirements for the installation of specific equipment for the use of compressed natural gas (CNG) in the propulsion system of a vehicle
- 6.2.1.1. A CNG retrofit system shall consist at least of the following components:
- 6.2.1.1.1. Components indicated in Regulation No. 110 and defined as necessary,
- 6.2.1.1.2. Installation manual,
- 6.2.1.1.3. End-user manual.
- 6.2.1.2. The CNG retrofit system may also include components indicated as optional in Regulation No. 110.
- 6.2.1.3. The CNG retrofit system installed in the vehicle, in a proper way as defined in the above installation manual, shall comply with the installation requirements of Regulation No. 110. Concerning the fixation of the fuel container, the requirements of Regulation No. 110 shall be deemed to be met if the requirements of Annex 5 to the present Regulation are satisfied.
- 6.2.2. Pollutants emissions and CO<sub>2</sub> emissions (for category M<sub>1</sub> and N<sub>1</sub> vehicles only)
- 6.2.2.1. One CNG retrofit system sample, as described in paragraph 2 of this Regulation, installed into the parent vehicle as described in paragraph 2. of this Regulation, shall be submitted to the test procedures described in Regulations Nos. 83 5/ and No. 101, or No. 49 6/, where applicable, in the limits of the requirements of paragraphs 6.2.2.5. and 6.2.2.6.
- The vehicles and/or the engines are also submitted to a maximum power comparison test, as described in Regulation No. 85 for engines or defined in paragraph 6.2.3. below for vehicles.
- ~~6.2.2.2. In order to prove that the retrofit system is "non-intrusive", as defined in paragraph 2.1.5., the system manufacturer shall provide data and/or engineering evaluations which adequately demonstrate that the original air and petrol feed process to the engine is not affected by the installation of the retrofit system.~~
- 6.2.2.3.2. Fuel requirements by the engine, the type of fuels normally used by the engine:

---

5/ According to Regulation No. 83, the series of amendments in force during the initial type approval of the vehicle.

6/ According to Regulation No. 49, the series of amendments in force during the initial type approval of the engine.

- (a) CNG only (**mono-fuel**)
- (b) both unleaded petrol or CNG (**bi-fuel**)
- (c) both diesel fuel or diesel fuel and CNG (**dual fuel**)  
(provisions for dual fuel have still to be defined).

6.2.2.4.3. **"Pollutants"** means:

Formatted: English (U.S.)

- (i) carbon monoxide
- (ii) hydrocarbons assuming a ratio
  - CH<sub>1,85</sub> for petrol
  - CH<sub>1,86</sub> for diesel fuel
  - CH<sub>4</sub> for CNG
  - CH (to be defined) for dual fuel
- (iii) oxides of nitrogen, the latter being expressed in nitrogen dioxide (NO<sub>2</sub>) equivalent
- (iv) particulates, etc.

6.2.2.5.4. Exhaust emissions (M<sub>1</sub> and N<sub>1</sub> categories of vehicles and CO<sub>2</sub> emissions M<sub>1</sub> category vehicles):

6.2.2.5.4.1. Specific requirements on the Type I test (verifying the average exhaust emissions after a cold start) as defined in Regulation No. 83, 05 series of amendments (for vehicles having the maximum mass not exceeding 3,500 kg):

6.2.2.5.4.1.1. ~~Three m~~ Measurements of tailpipe emissions shall be performed after a cold start with each fuel:

- (i) reference petrol,
- (ii) reference G20 fuel,
- (iii) reference G25 fuel.

The emissions of CO, HC, and NO<sub>x</sub> ~~and HC + NO<sub>x</sub>~~ are calculated according Regulation No. 83. 4/

6.2.2.4.1.2. **Setting of the dynamometer**

**With the agreement of the type approval authority, one of the following methods may be used:**

6.2.2.4.1.2.1. **Using of coast-down factors/coefficients of the original vehicle:**

**In case coast-down coefficients of the original vehicle used during the type approval are used, the following conditions shall apply:**

- (a) the parent vehicle mass shall be measured with the retrofit system installed on the vehicle including the CNG tank fully filled up or shall be calculated as the sum of the original vehicle reference mass and the mass of the retrofit system with the CNG tank fully filled up,



- (b) the inertia mass of the parent vehicle shall be determined according to the mass of the retrofitted vehicle,
- (c) the rolling resistance of the parent vehicle shall correspond to the original vehicle value proportionally adjusted to the parent vehicle mass measured or calculated as above:

$$f_0' = f_0 + (\text{abs}(f_0)) * (p/m)$$

where

$f_0'$  = rolling resistance of the parent vehicle  
 $f_0$  = rolling resistance of the original vehicle  
 $m$  = reference mass of the original vehicle  
 $p$  = retrofit system mass

- (d) the other coefficients of the resistance of the parent vehicle shall be equal to that of the original vehicle.

6.2.2.4.1.2.2. Using of the table values:

- (a) the parent vehicle mass shall be measured with the retrofit system installed on the vehicle including the CNG tank fully filled up or shall be calculated as the sum of the original vehicle reference mass and the mass of the retrofit system with the CNG tank fully filled up
- (b) the inertia mass of the parent vehicle shall be determined according to the mass of the retrofitted vehicle,
- (c) the coefficient a shall be the one corresponding to the reference mass of the retrofitted vehicle,
- (d) the coefficient b shall be the one corresponding to the reference mass of the original vehicle.

~~6.2.2.5.1.2. The test vehicle(s) equipped with the retrofit system, and with the reference petrol shall comply with the limit values according to the type approval of the vehicle(s) including the deterioration factors applied during the type approval of the vehicle(s).~~

~~This condition is deemed to be met if the emissions values for each pollutant or combination of pollutants obtained in each test with reference petrol are less than the limits.~~

~~However, one of the three test values obtained may exceed, by not more than 10 per cent, the limit prescribed, provided that the arithmetical mean of the three values is below this limit.~~

~~Where the prescribed limits are exceeded for more than one pollutant or combination of pollutants, it is immaterial whether this occurs in the same test or different tests.~~

~~6.2.2.5.1.3. The requirements regarding emissions of the vehicle(s) equipped with the retrofit system, and with the two reference gases, shall be deemed to be fulfilled if the results meet the following conditions for each regulated pollutant (CO, HC + NO<sub>x</sub>) or (CO, HC, NO<sub>x</sub>) according to the requirements the petrol parent vehicle had to comply with at the date of its approval:~~

~~(1)  $(MA + MB)/2 < 0.85S + 0.4G$~~

~~(2)  $MA \text{ and } MB < G$~~

~~where:~~

~~MA: mean value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>)  $\frac{1}{2}$  or the sum of two pollutants (HC + NO<sub>x</sub>) obtained from the three Type I tests with the retrofit system and with G<sub>20</sub>~~

~~MB: mean value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>)  $\frac{1}{2}$  or the sum of two pollutants (HC + NO<sub>x</sub>) obtained from the three Type I tests with the retrofit system and with G<sub>25</sub>~~

~~S: mean value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>)  $\frac{1}{2}$  or the sum of two pollutants (HC + NO<sub>x</sub>) obtained from the three Type I tests with the reference petrol,~~

~~G: limit value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>)  $\frac{1}{2}$  or the sum of two pollutants (HC + NO<sub>x</sub>) according to the type approval of the vehicle(s) divided by the deterioration factors.~~

6.2.2.4.1.3. Subject to the requirements of paragraph 6.2.2.4.1.5. the tests shall be repeated three times using reference petrol. The parent vehicle(s), equipped with the retrofit system, shall comply with the limit values according to the type approval of the original vehicle(s) including the deterioration factors applied during the type approval of the original vehicle(s).

6.2.2.4.1.4. Notwithstanding the requirements of paragraph 6.2.2.4.1.3., for each pollutant or combination of pollutants, one of the three test results may exceed, by not more than 10 per cent, the limit prescribed, provided that the arithmetical mean of the three results is below the prescribed limit. In this case the prescribed limits may be exceeded for more than one pollutant in the same test or in different tests.

6.2.2.4.1.5. The number of emission tests prescribed in paragraph 6.2.2.4.1.3. may be reduced under the following conditions:

- (a) one test is required if the result obtained for each pollutant subject to limitation is less than or equal to 0.7 the emission limit (i.e.  $V1 \leq 0.70 G$ ),
- (b) two tests are required if, for each pollutant subject to limitation the following requirements are met:

$$V1 \leq 0.85 G \text{ and } V1 + V2 \leq 1.70 G \text{ and } V2 \leq G$$

where:

- V1:** value of the emission of one pollutant obtained from the first test of the Type I performed;
- V 2:** value of the emission of one pollutant obtained from the second test of the Type I performed;
- G:** limit value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>) according to the type approval of the vehicle(s) divided by the deterioration factors.

**6.2.2.4.1.6** Subject to the requirements of paragraph 6.2.2.4.1.8., the tests shall be repeated three times with each reference CNG. The parent vehicle(s), equipped with the retrofit system, shall comply with the limit values according to the type approval of the original vehicle(s) including the deterioration factors applied during the type approval of the original vehicle(s).

If the parent vehicle(s) complies with Regulation No. 83, 05 series of amendments, or with Directive 98/69/EC, or with Regulation No. 49, 04 series of amendments, or with Directive 1999/96/EC, the vehicle shall not use petrol for more than a maximum of 90 seconds during each test.

For vehicles complying with later series of amendments to Regulations Nos. 83 and 49, or later amending Directives or European Regulations, this period shall not exceed 60 seconds.

**6.2.2.4.1.7.** Notwithstanding the requirements of paragraph 6.2.2.4.1.6., for each pollutant or combination of pollutants, one of the three test results may exceed, by not more than 10 per cent, the limit prescribed, provided that the arithmetical mean of the three results is below the prescribed limit. In this case the prescribed limits may be exceeded for more than one pollutant in the same test or in different tests.

~~6.2.2.5.1.4. Notwithstanding the provisions of paragraphs 6.2.2.5.1.1. to 6.2.2.5.1.3., for non-intrusive retrofit system as defined in paragraph 2.1.5., the Type I test shall be carried out only with each CNG reference fuel.~~

~~6.2.2.5.1.4.1. Subject to the requirements of paragraph 6.2.2.5.1.4.2. the tests shall be repeated three times.~~

~~————— The test vehicle(s) with each reference CNG shall comply with the limits values according to the type approval of the vehicle(s) including the deterioration factors applied during the type approval of the vehicle(s).~~

**6.2.2.4.1.8.** The number of emission tests prescribed in paragraph 6.2.2.4.1.6. on each CNG reference fuel may be reduced under the following conditions:  
(a) one test is required if the result obtained for each pollutant subject to limitation is less than or equal to 0.7 the emission limit (i.e.  $M1 \leq 0.70 G$ ),

**(b) two tests are required if, for each pollutant subject to limitation the following requirements are met:**

$$M1 \leq 0.85 G \text{ and } M1 + M2 \leq 1.70 G \text{ and } M2 \leq G$$

where:

M1: value of the emission of one pollutant obtained from the first test of the Type I performed;

M2: value of the emission of one pollutant obtained from the second test of the Type I performed;

G: limit value of the emissions of one pollutant (CO/HC/NO<sub>x</sub>) ~~or the sum of two pollutants (HC + NO<sub>x</sub>)~~ according to the type approval of the vehicle(s) divided by the deterioration factors.

6.2.2.5.4.2. Specific requirements on the Type II test (carbon monoxide emission test at idling speed) for vehicles having a maximum mass exceeding 3,500 kg:

6.2.2.5.4.2.1. One CNG retrofit system sample, as described in paragraph 2. of this Regulation, installed into the parent vehicle, as described in paragraph 2. of this Regulation, shall be submitted to the type II test procedures described in Regulation No. 83.

6.2.2.5.4.2.2. Notwithstanding the provisions of Annex 5 of Regulation No. 83, 05 series of amendments, the Type II test shall be performed at the request of the system manufacturer with only one CNG reference fuel chosen at the discretion of the type approval technical service responsible for the test.

6.2.2.5.4.3. Calculation of the CO<sub>2</sub> emissions and fuel consumption (for M1 and N1 category of vehicles)

6.2.2.5.4.3.1. The emissions of CO<sub>2</sub> are calculated according to Regulation No. 101 for each parent vehicle, if applicable.

The mean of CO<sub>2</sub> emissions shall be calculated as follows:

$$CO_{2CNG} = 1/n \sum_{i=1}^n (CO_{2G20i} + CO_{2G25i}) / 2$$
$$CO_{2petrol} = 1/n \sum_{i=1}^n CO_{2petrol.i}$$

where:

i: number of parent vehicles (i = 1 to n)

CO<sub>2G20</sub>: mean value of the emissions of CO<sub>2</sub> obtained from the three Type I tests with the retrofit system and with CNG G20 for vehicle No. i,

CO<sub>2G25</sub>: mean value of the emissions of CO<sub>2</sub> obtained from the three Type I tests with the retrofit system and with CNG G25 for vehicle No. i;

CO<sub>2petrol.i</sub>: mean value of the emissions of CO<sub>2</sub> obtained from the three Type I

tests with reference petrol for vehicle No. i.

- 6.2.2.5.4.3.2. The mean fuel consumption shall be calculated in the same way as for the mean of CO<sub>2</sub> emissions, as defined in paragraph 6.2.2.5.3.1.
- 6.2.2.5.4.3.3. The ratios of CO<sub>2</sub> emissions and fuel consumption shall be calculated as follows:

$$K_{CO_2} = CO_{2CNG} / CO_{2petrol}$$

$$K_{Cons} = Cons_{CNG} / Cons_{petrol}$$

For each vehicle of the family, the official values of CO<sub>2</sub> emissions and fuel consumption are multiplied by the above ratios.

~~6.2.2.5.3.4. Notwithstanding the provisions of paragraphs 6.2.2.5.3.1. and 6.2.2.5.3.2., for non-intrusive system, as defined in paragraph 2.1.5. of this Regulation, the value of the petrol CO<sub>2</sub> emission and the fuel consumption may be the official values of the vehicle No. i.~~

- 6.2.2.6.5. Exhaust emissions (M<sub>2</sub>, M<sub>3</sub>, N<sub>2</sub> and N<sub>3</sub> categories of vehicles)

This paragraph is reserved for the specific requirements for emissions of diesel engines approved according to Regulation No. 49 and equipped with a retrofit CNG system (dual fuel) if required.

~~The parent engine(s) are submitted to the tests indicated in Regulation No. 49 5/ as follows:~~

~~measurements of emissions in the 13-mode cycle with each fuel:~~

- ~~(i) reference diesel fuel,~~
- ~~(ii) reference diesel fuel and CNG.~~

~~The emissions of CO, HC, NO<sub>x</sub> and particulates are calculated according to Regulation No. 49. 5/~~

~~The test engine(s) with the reference diesel fuel shall comply with the limit values according to the type approval of the engine(s) applied during the type approval.~~

~~The requirements regarding emissions of the engine(s) equipped with the retrofit system, and with the CNG, shall be deemed to be fulfilled if the~~

---

~~5/~~ According to Regulation No. 49, the series of amendments in force during the initial type approval of the engine.

~~results meet for each regulated pollutant (CO, HC, NOx and particulates) the following conditions:~~

~~(1)  $M < 0.85S + 0.4G$~~

~~(2)  $M < G$~~

~~where:~~

~~M: value of the emissions of one pollutant obtained from the 13-mode test with the retrofit system and with CNG,~~

~~S: value of the emissions of one pollutant obtained from the 13-mode test with the reference diesel fuel,~~

~~G: limit value of the emissions of one pollutant according to the type approval of the engine(s).~~

6.2.3. Power requirements

The parent vehicle(s) or engine(s) are submitted to the tests as follows:

6.2.3.1. One CNG retrofit system sample as described in paragraph 2. of this Regulation, installed in the parent vehicle(s) or on the parent engine(s) shall be submitted to the test procedures of paragraph 6.2.3.2. or 6.2.3.3. The measured power with CNG shall be lower than that measured with petrol + 5 per cent.

6.2.3.2. Chassis dynamometer method:

The maximum power at the wheels is measured on a chassis dynamometer on each parent vehicle with the following fuels:

- (i) reference petrol,
- (ii) reference fuel G20 or G25,

The mean of power measurements shall be calculated as follows:

$$\text{Power}_{\text{petrol}} = 1/n \sum_{i=1}^n \text{Power}_{\text{petrol},i}$$

$$\text{Power}_{\text{CNG}} = 1/n \sum_{i=1}^n \text{Power}_{\text{CNG},i}$$

The ratio of engine power shall be calculated as follows:

$$K_{\text{power}} = \text{Power}_{\text{CNG}} / \text{Power}_{\text{petrol}}$$

For each vehicle of the family, the official values of engine power are multiplied by the above ratio.

6.2.3.3. Engine dynamometer method:

The maximum power at the crankshaft is measured on an engine dynamometer according to Regulation No. 85 for each parent vehicle(s) with the following fuels:

- (i) commercial petrol or diesel fuel,
- (ii) commercial CNG,

The mean of power measurements shall be calculated as follows:

$$\text{Power}_{\text{petrol}} = 1/n \sum_{i=1}^n \text{Power}_{\text{petrol}.i}$$
$$\text{Power}_{\text{CNG}} = 1/n \sum_{i=1}^n \text{Power}_{\text{CNG}.i}$$

The ratio of engine power shall be calculated as follows:

$$K_{\text{power}} = \text{Power}_{\text{CNG}} / \text{Power}_{\text{petrol}}$$

For each vehicle of the family, the official values of engine power are multiplied by the above ratio.

~~6.2.3.4. Notwithstanding the provisions of paragraph 6.2.3.1., with regard to the way to calculate the mean of maximum power on petrol in paragraphs 6.2.3.2. and 6.2.3.3., for non-intrusive system, as defined in paragraph 2.1.5. of this Regulation, the value of maximum power on petrol of the vehicle(s) No. i may be the official value.~~

6.2.4. OBD requirements and tests for vehicles retrofitted with CNG retrofit system.

6.2.4.1. For the purposes of this paragraph, the following definitions apply:

6.2.4.1.1. "original emission-related component" means any component in the air inlet, exhaust or evaporative system which supplies an input to or receives an output from the petrol controller;

- 6.2.4.1.2. "CNG emission-related component" means any component in the air inlet or in the exhaust system which supplies an input to or receives an output from the CNG controller.
- 6.2.4.2. In the case that there is a need, to fit properly the CNG retrofit system in the vehicle, it is allowed to simulate the right operation of the original emission-related components which are not in use on CNG mode.
- 6.2.4.3. The CNG retrofit system, as described in paragraph 2. of this Regulation, installed into the parent vehicle(s), shall comply with the requirements and tests of Annex 11 of Regulation No. 83, 05 series of amendments on both petrol and CNG modes.
- 6.2.4.4. Specific OBD requirements and tests for "master-slave" retrofit system:
- 6.2.4.4.1. Notwithstanding the requirements of paragraph 6.2.4.3., a "Master-slave" retrofit system shall fulfil the following requirements:
- (a) the petrol ECU shall remain activated for engine management in both petrol and CNG modes
  - (b) during petrol operations the petrol OBD system shall remain the only on-board diagnostic system of the vehicle
  - (c) during CNG operations the petrol OBD system shall continue to monitor the original emission related components with the exception of those which are not in use
  - (d) during CNG operations the CNG ECU shall only monitor for the CNG emission-related components as well as their electrical connections;
- 6.2.4.4.2. Notwithstanding the requirements of paragraph 6.2.4.3., the CNG retrofit system shall be submitted to the following tests, which, in the case of Type I tests, shall be performed according to Annex 11, Appendix 1, of Regulation No. 83, 05 series of amendments.
- 6.2.4.4.2.1. The following tests shall be carried out on one parent vehicle, equipped with the CNG retrofit system:
- (a) the CNG ECU shall follow the petrol ECU on fuel strategies (e.g. injection and ignition strategies (e.g. spark plug advance)). This can be demonstrated by a monitoring (diagnostic) programme, while modifying the signal of one of the petrol system's sensors with an impact on the injection time and on ignition spark plug advance
  - (b) during a Type I test on petrol the original MI shall activate due to the electrical disconnection of any original emission-related component.
  - (c) during a Type I test on CNG the original MI shall activate due to the electrical disconnection of any original emission-related component, which is in use during CNG operations.



- 6.2.4.4.2.2. The following tests shall be carried out on the parent vehicle(s), equipped with the CNG retrofit system, only on CNG operating mode:
- (a) during a Type I test, electrical disconnection of one CNG emission-related component;
  - (b) during a Type I, test replacement of one CNG emission-related component with a deteriorated and defective one or electronic simulation of such a failure.

The original MI or automatic switch from CNG mode to petrol mode shall activate before the end of the tests under any of the conditions above.

- 6.2.4.4.2.3. Fault codes due to malfunctions of the CNG emission-related components and their electrical connections shall be stored in the CNG ECU.
- 6.2.4.4.2.4. The system manufacturer shall provide specific instructions as to read out the CNG fault codes referred to in paragraph 6.2.4.4.2.3.

## 7. INSTRUCTION MANUALS

### 7.1. Installation manual for the retrofit installation on the vehicle

#### 7.1.1. Scope

The scope of this paragraph is to list the minimum requirements which shall be contained in the installation manual.

#### 7.1.2. List of reference standards:

#### 7.1.3. General requirements

7.1.3.1. The installation manual has the purpose to guide the installer through the correct procedures which shall be observed while assembling the LPG/CNG systems.

7.1.3.2. The installation manual shall be prepared by the retrofit system manufacturer.

7.1.3.3. The installation manual is part of the retrofit system and shall therefore be provided for each conversion kit.

7.1.3.4. The installation manual must be written in the language of the country to which the conversion retrofit will be delivered, or at least in English.

7.1.3.5. The installation manual can be divided in two parts:

- Part I: (i) Part containing the description of the sample of the retrofit system.  
(ii) Part containing the list of components indicated by the retrofit manufacturer as alternatives.

Part II: (i) Part containing installation instructions for the specific vehicle.

- 7.1.3.6. Installation manual of the parent vehicle(s) has to be submitted to the authority that grants the type approval.
- 7.1.3.7. Installation manual of the vehicles belonging to the family has to be filed by the retrofit system manufacturer for a time to be determined in accordance with the authority that grants the type approval.
- 7.1.4. Contents of Part I, section (i) of installation manual
  - 7.1.4.1. Retrofit system description
    - 7.1.4.1.1. Operational principles of the retrofit system
    - 7.1.4.1.2. Operational principles of each component of the retrofit system"
  - 7.1.4.2. Proper assembly check
    - 7.1.4.2.1. The installation manual shall contain the detailed procedures and actions which must be taken by the installer to check whether the system has been assembled in order to safely perform and to abide by the installation instructions.
  - 7.1.4.3. Start-up procedures
    - 7.1.4.3.1. The installation manual shall contain the start-up operations which must be performed by the installer.
  - 7.1.4.4. Service instructions
    - 7.1.4.4.1. The installation manual shall contain the maintenance schedule in which all the ordinary service (type) which the single components as well as the system must undergo through their working life (time in km covered by the vehicle) will be specified.
    - 7.1.4.4.2. The installation manual must specify the expertise necessary for the installation/service of the system.
  - 7.1.4.5. System malfunction
    - 7.1.4.5.1. The installation manual shall contain the actions which must be taken in case the system malfunctions.
  - 7.1.4.6. Diagnosis
    - 7.1.4.6.1. If a diagnosis system is included in the conversion kit, the installation manual

shall contain a detailed description of such a system together with the corrective actions which may be taken in case of malfunctioning.

- 7.1.5. Contents of Part II of installation manual
- 7.1.5.1. Retrofit system identification
  - 7.1.5.1.1. Retrofit system approval number
  - 7.1.5.1.2. Vehicle manufacturer
  - 7.1.5.1.3. Vehicle category
  - 7.1.5.1.4. Vehicle type
  - 7.1.5.1.5. Engine type
  - 7.1.5.1.6. Engine displacement
  - 7.1.5.1.7. Transmission type
  - 7.1.5.1.8. Vehicle model
  - 7.1.5.1.9. Type of conversion retrofit (LPG or CNG)
  - 7.1.5.1.10. Assembly instruction number
  - 7.1.5.1.11. General scheme of the retrofit system containing the following information of each component:
    - (a) identification number
    - (b) manufacturer's code
    - (c) type approval, if it exists
    - (d) for the containers: capacity/manufacturer/type/date of expiry or replacement date, if it exists
  - 7.1.5.1.12. Description (including drawings, if applicable) of the fitting devices of the container installation on the vehicle.
- 7.1.5.2. Installation instructions

- 7.1.5.2.1. Assembly instructions of all components together with diagrams or photographs showing clearly the layout of the single components within the engine compartment.
- 7.1.5.2.2. Diagram or photograph showing the exact position where the installer shall place the retrofit system type approval plate (contained in the conversion kit).
- 7.1.5.2.3. Clear wiring diagram of the electrical system containing the mechanical components to which the wires shall be connected.

## 7.2. End-User Manual

### 7.2.1. Scope

To specify the minimum requirements of the end-user manual for LPG/CNG systems maintenance.

### 7.2.2. General requirements

7.2.2.1. The user manual has the purpose to inform the end-user about the characteristics and safety features of the installed LPG/CNG systems.

7.2.2.2. The user manual shall be prepared by the manufacturer of the retrofit system.

7.2.2.3. The manufacturer of the system shall include all the necessary information that is needed for correct use and safe operation of the LPG/CNG systems.

7.2.2.4. The user manual shall be considered as an integral part of the system and therefore be delivered with the LPG/CNG systems.

7.2.2.5. The user manual shall be written in the language of the country to which the system is delivered.

7.2.2.6. The user manual shall indicate reference to the product type and version and production year for which it is applicable.

7.2.2.7. Information shall be given for relevant extreme ambient conditions.

### 7.2.3. Contents of the end-user manual

#### 7.2.3.1. Technical specifications

The user manual shall contain at least the following information:

- (a) Operating characteristics
- (b) Performance under normal operating conditions
- (c) Extreme ambient conditions.

7.2.3.2. Safety instructions

The user manual shall give warning for dangers to health and safety categorised in the following way:

- (a) SUGGESTIONS for optimal use of the system
- (b) ATTENTION for possible problems due to misuse
- (c) WARNING for damage to persons or goods when procedures are not followed.

If and when safety symbols are used, they shall be in accordance with the international system, SI and their purpose must be clearly specified in the user manual.

The user manual shall indicate proper actions to be taken in case the vehicle is repainted and put in a hot drying cabin.

7.2.3.3. LPG/CNG systems description

All the components of the LPG/CNG systems shall be clearly described for their purpose, use and function.

7.2.3.4. First use and adjustment of the LPG/CNG systems

The user manual shall contain all the necessary information to the end user about initial running in and or adjustment of the system when needed.

7.2.3.5. Operating of the LPG/CNG systems

7.2.3.5.1. Filling of the LPG/CNG systems

The user manual shall indicate the sequence of operations needed to fill up the LPG/CNG containers. Particular attention must be paid to the maximum filling level of the 80 per cent in case of LPG.

7.2.3.5.2. Switch-over procedure

The user manual shall clearly describe the method of switching over from one to the other alternative fuel by giving the sequence of operations.

7.2.3.5.3. Opening/closing of manual valves

When fitted, the user manual shall indicate the proper procedure to operate the manual valves.

7.2.3.5.4. Level indicator

The user manual shall state the location of the level indicator, for example at the dashboard or at the container. Its read-out has to be clearly explained to the user, giving particular attention to the 80 per cent filling level in case of LPG.

7.2.3.5.5. Maintenance

If maintenance is required, the user manual shall state the frequency and type of maintenance to be carried out.

7.2.3.5.6. Defects and repair

The user manual shall indicate which actions have to be taken in the case of a defect of the system.

When the system is equipped with a diagnosis system the user manual shall describe this system and indicate proper actions to be taken.

7.2.3.5.7. Scrapping of the product

The user manual shall give proper indication about precautions to be taken when the system has to be removed from the vehicle.

8. MODIFICATION AND EXTENSION OF APPROVAL OF A RETROFIT SYSTEM TYPE

8.1. Every modification of the installation of the specific retrofit system for the use of LPG or CNG in the propulsion system of the vehicle shall be notified to the authority, which granted the retrofit system type approval. The authority may then either:

Deleted: equipment

8.1.1. Consider that the modifications made are unlikely to have an appreciably adverse effect and that in any case the retrofit system still complies with the requirements, or

8.1.2. Require a further test report from the technical service responsible for conducting the tests.

8.2. In both cases described in paragraphs 8.1.1. and 8.1.2. above, the authority shall be presented in the updated installation manual.

Formatted: Justified, Indent: Left: 0 cm, Hanging: 2.5 cm, Automatically adjust right indent when grid is defined, No widow/orphan control, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers, Tabs: 2.5 cm, Left + 3.25 cm, Left + 4.25 cm, Left + 6.1 cm, Left + 11.22 cm, Left + 11.8 cm, Left + 12.7 cm, Left + 13.97 cm, Left + 15.24 cm, Left + 16.51 cm, Left

Formatted: Font: (Default) Times New Roman, 12 pt, Not Italic, English (U.K.)

Formatted: Font: (Default) Times New Roman, 12 pt, Not Italic, English (U.K.)

Formatted: Font: (Default) Times New Roman, 12 pt, Not Italic, English (U.K.)

Formatted: Font: (Default) Times New Roman, 12 pt, Not Italic, English (U.K.)

8.3. With regard to the Type 1 tests, as described in paragraphs 6.1.2.4.1 and 6.2.2.4.1, the type-approval shall be extended only to retrofit system that implies parent vehicle's with a reference mass requiring the use of the next two higher equivalent inertia categories or any lower equivalent inertia category.

Comment: This is an adaptation of what is already foreseen in the case of extension of vehicles approval with different reference masses (see par 3.1.1.1. of Annex I of Commission Regulation (CE) No 692/2008 par. 7.1.1.1. of Regulation No 83). Obviously, the adaptation takes into account that the object of the Regulation No 115 is the retrofit system – and not the vehicle - whose mass is added to the parent vehicle reference mass to obtain the reference mass of the retrofitted vehicle according to the new par.s 6.1.2.4.1.2 and 6.2.2.4.1.2.

~~8.4.~~ Confirmation or refusal of approval, specifying the alteration, shall be communicated by the procedure specified in paragraph 5.3. above to the Parties to the 1958 Agreement applying this Regulation.

Deleted: 1

Deleted: 3

~~8.5.~~ The competent authority issuing the extension of approval shall assign a series number for such an extension and inform thereof the other Parties to the 1958 Agreement applying to this Regulation by means of a communication form conforming to the model in Annexes 1A and/or 1B to this Regulation.

Deleted: 4

## 9. CONFORMITY OF PRODUCTION

The conformity of production procedures shall comply with those set out in the Agreement, appendix 2 (E/ECE/324 - E/ECE/TRANS/505/Rev.2).

## 10. PENALTIES FOR NON-CONFORMITY OF PRODUCTION

10.1. The approval granted in respect of a type of retrofit system pursuant to this Regulation may be withdrawn if the requirements laid down in paragraph 9 above are not complied with.

10.2. If a Party to the Agreement applying this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation, by means of a communication form conforming to the models in Annexes 1A and/or 1B to this Regulation.

## 11. PRODUCTION DEFINITELY DISCONTINUED

11.1. If the holder of the approval completely ceases to manufacture a type of retrofit system approved in accordance with this Regulation, he shall so inform the authority which granted the approval. Upon receiving the relevant communication, that authority shall inform thereof the other Parties to the 1958 Agreement applying this Regulation by means of a communication form conforming to the model in Annexes 1A and/or 1B to this Regulation.

## 12. NAMES AND ADDRESSES OF TECHNICAL SERVICES RESPONSIBLE FOR CONDUCTING APPROVAL TESTS, AND OF ADMINISTRATIVE DEPARTMENTS

- 12.1. The Parties to the Agreement applying this Regulation shall communicate to the United Nations Secretariat the names and addresses of the technical services responsible for conducting approval tests and of the administrative departments which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval, issued in other countries, are to be sent.



Annex 1A

COMMUNICATION

(maximum format: A4 (210 x 297 mm))



issued by: Name of administration:

.....  
.....  
.....

concerning: 2/ APPROVAL GRANTED  
APPROVAL EXTENDED  
APPROVAL REFUSED  
APPROVAL WITHDRAWN  
PRODUCTION DEFINITELY DISCONTINUED

of a type of LPG retrofit system pursuant to Regulation No. 115

Deleted: equipment

Approval No.: .....

Extension No.: .....

1. LPG retrofit system considered:

Deleted: equipment

Container

Accessories fitted to the container 2/

80 per cent stop valve

Level indicator

Pressure relief valve (discharge valve)

Pressure relief device

Remote controlled service valve with excess flow valve

With/without LPG fuel pump 2/

Multivalve, including the following accessories: .....

Ventilation housing

Power supply bushing (pump/actuators) 2/

Fuel pump 2/

Vaporiser/pressure regulator 2/

Shut-off valve 2/

Non-return valve 2/

Gas tube pressure relief valve 2/

Service coupling 2/

Flexible hose 2/

Remote filling point 2/

Gas injection device or injector 2/

Gas dosage unit 2/

Gas mixing piece 2/

- Electronic control unit 2/
- Pressure/temperature sensor 2/
- LPG filter unit 2/
- 2. Trade name or mark .....
- 3. Manufacturer's name and address .....
- 4. Name and address of manufacturer's representative, if applicable .....
- .....
- 5. Submitted for approval on .....
- 6. Technical service responsible for conducting approval tests .....
- .....
- 7. Date of report issued by that service .....
- 8. No. of report issued by that service .....
- 9. Approval granted/refused/extended/withdrawn 2/ .....
- 10. Reason(s) of extension (if applicable) .....
- 11. Vehicle types in which the retrofit system can be installed (M<sub>1</sub> and N<sub>1</sub> categories), or vehicle types in which the retrofit system can be installed (other categories of vehicles) and, if applicable, CO<sub>2</sub> and power ratios (see Addendum to this annex) .....
- .....
- 11.1. Emission requirements:  
**Has the retrofit system demonstrated to be "non-intrusive": yes/no 2/**  
Regulation No. 83, ..... series of amendments 3/  
Regulation No. 49, ..... series of amendments 3/
- 11.2. OBD requirements:  
Has the retrofit system demonstrated to be "master-slave": yes/no 2/
- 11.1. Emission requirements:  
Regulation No. 83, ..... series of amendments 3/ approval A/B/C 2/  
Regulation No. 49, ..... series of amendments 3/
- 12. Place .....
- 13. Date .....
- 14. Signature .....
- 15. The documents filed with the application or extension of approval can be obtained upon request.

---

1/ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).  
2/ Strike out what does not apply.  
3/ Amendment in force at the time of the initial type approval of the vehicle or engine.

Annex 1A - Addendum

ADDENDUM TO THE COMMUNICATION CONCERNING A TYPE OF LPG RETROFIT SYSTEM PURSUANT TO REGULATION No. 115

Deleted: EQUIPMENT

(Approval No. .... Extension No. ....)

1. Vehicles on which the retrofit system has been tested:

Deleted: equipment

Vehicle No.	1	2	n
Make:			
<u>Manufacturer:</u>			
Type:			
Category, <u>class:</u>			
Emission limits:			
<u>Number of cylinders:</u>			
<u>Fuel feed and combustion process*:</u>			
Power:			
<u>Pollution control system type**:</u>			

Formatted: Indent: Left: -0.02 cm, No bullets or numbering, Tabs: -0.27 cm, List tab + Not at 3.81 cm

\* Injection: direct or indirect, single point or multi-point.

\*\* Specify the type of catalyst (three-way, oxidation, deNOx), air injection (with/without), EGR (with/without).

Formatted: English (U.K.)

Deleted:

Formatted: English (U.K.)

Deleted: -

2. Test results:

Ratio CO<sub>2LPG</sub> / CO<sub>2 petrol</sub> : 2 / .....

Ratio Power<sub>LPG</sub> / Power<sub>petrol (or diesel)</sub> : .....

3. Vehicles type(s) for which the retrofit system type is qualified:

Deleted: equipment

<u>Category class</u>	Fuel			Petrol (or diesel) <u>1</u> /					LPG			
	Vehicle type	Engine type	Power (kW)	CO <u>3</u> / (g/km)	HC <u>3</u> / (g/km)	NO <sub>x</sub> <u>3</u> / (g/km)	CO <sub>2</sub> <u>2</u> / (g/km)	Power (kW)	CO <u>3</u> / (g/km)	HC <u>3</u> / (g/km)	NO <sub>x</sub> <u>3</u> / (g/km)	CO <sub>2</sub> <u>2</u> / (g/km)

Formatted Table

1/ Strike out what does not apply.

- 2/ Applicable to vehicles of category M<sub>1</sub> and N<sub>1</sub> only.
- 3/ Applicable only to parent vehicle(s)"

Annex 1B

COMMUNICATION  
(maximum format: A4 (210 x 297 mm))



issued by: Name of administration:

.....  
.....  
.....

concerning: 2/ APPROVAL GRANTED  
APPROVAL EXTENDED  
APPROVAL REFUSED  
APPROVAL WITHDRAWN  
PRODUCTION DEFINITELY DISCONTINUED

of a type of CNG retrofit equipment pursuant to Regulation No. 115

Approval No.....

Extension No.....

1. CNG equipment comprising:
  - Container
  - Accessories fitted to the container 2/
    - Level or pressure indicator
    - Pressure relief valve (discharge valve)
    - Remote-controlled automatic valve with excess flow valve
    - Pressure relief device
    - Gas-tight housing
  - Pressure regulator 2/
  - Automatic valve 2/
  - Check valve 2/
  - Flexible fuel line or hose 2/
  - Filling unit 2/
  - Gas/air mixer (injector)
  - Flow gas adjuster
  - Gas/air mixer (carburettor)
  - Electronic control unit 2/
  - Pressure/temperature sensor 2/
  - CNG filter 2/
2. Trade name or mark .....
3. Manufacturer's name and address .....
4. Name and address of manufacturer's representative, if applicable .....
5. Submitted for approval on .....

- 6. Technical service responsible for conducting approval tests .....
- 7. Date of report issued by that service .....
- 8. No. of report issued by that service .....
- 9. Approval granted/refused/extended/withdrawn 2/ .....
- 10. Reason(s) of extension (if applicable) .....
- 11. Vehicle types in which the retrofit system can be installed (M<sub>1</sub> and N<sub>1</sub> categories), or vehicle types in which the retrofit system can be installed (other categories of vehicles) and, if applicable, CO<sub>2</sub> and power ratios (see Addendum to this annex) .....
- 11.1. Emission requirements:  
  - ~~Has the retrofit system demonstrated to be "non-intrusive": yes/no 2/~~
  - Regulation No. 83, ..... series of amendments 3/
  - Regulation No. 49, ..... series of amendments 3/
- 11.2. OBD requirements:  
  - Has the retrofit system demonstrated to be "master-slave": yes/no 2/
- 12. Place: .....
- 13. Date: .....
- 14. Signature: .....
- 15. The documents filed with the application or extension of approval can be obtained upon request.

1/ Distinguishing number of the country which has granted/extended/refused/withdrawn approval (see approval provisions in the Regulation).

2/ Strike out what does not apply.

3/ Amendment in force at the time of the initial type approval of the vehicle or engine.

Annex 1B - Addendum

ADDENDUM TO THE COMMUNICATION CONCERNING A TYPE  
OF CNG RETROFIT EQUIPMENT PURSUANT TO REGULATION No. 115

(Approval No. .... Extension No. ....)

1. Vehicles on which the retrofit equipment has been tested:

Vehicle No.	1	2	n
Make:			
Type:			
Category:			
Emission limits:			
Power:			
Pollution control system type:			

2. Test results:

Ratio  $CO_{2CNG}/CO_{2\text{ petrol}}$  : 2/ .....

Ratio  $Power_{CNG}/Power_{\text{ petrol (or diesel)}}$  : .....

3. Vehicles type(s) for which the retrofit equipment type is qualified:

Fuel		Petrol (or diesel) <u>1/</u>					CNG				
Vehicle type	Engine type	Power (kW)	CO <u>3/</u> (g/km)	HC <u>3/</u> (g/km)	NO <sub>x</sub> <u>3/</u> (g/km)	CO <sub>2</sub> <u>2/</u> (g/km)	Power (kW)	CO <u>3/</u> (g/km)	HC <u>3/</u> (g/km)	NO <sub>x</sub> <u>3/</u> (g/km)	CO <sub>2</sub> <u>2/</u> (g/km)


1/ Strike out what does not apply.

2/ Applicable to vehicles of category M<sub>1</sub> and N<sub>1</sub> only.

3/ Applicable only to parent vehicle(s)"

Annex 2A

ARRANGEMENT OF THE LPG RETROFIT SYSTEM TYPE APPROVAL MARK



a = 8 mm min.

The above approval mark affixed to the plate of LPG retrofit system, shows that it has been approved in Italy (E 3), pursuant to Regulation No. 115 under approval number 000000. The symbol "#" indicates the LPG retrofit system, the first two digits of the approval number indicate that approval was granted in accordance to the requirement of Regulation No. 115 in its original form.

<b>#115R-000000</b>	
NAME OR TRADE MARK: .....	
TYPE: LPG/CNG	Date: .....
<ul style="list-style-type: none"> <li>• VAPORIZER / REGULATOR .....</li> <li>• GAZ FUELLING SYSTEM .....</li> <li>• SAFETY DEVICE .....</li> <li>• CONTAINER.....</li> <li>• .....</li> <li>• .....</li> <li>• .....</li> </ul>	

AEGPL proposes to eliminate the list of components because at the moment of the inspection (when required by the national rules) the authority is provided with the approval documents detailing all the components and related technical information. Only the type-approval number of the whole system is needed.  
On the plate, the “name or trade mark” wording should be replaced by “TRADE NAME OR MARK”

Formatted: Justified


The above plate, with approval mark and some technical information on the retrofit system, has



to be fixed permanently on the body of the vehicle.

Annex 2B

ARRANGEMENT OF THE CNG RETROFIT SYSTEM TYPE APPROVAL MARK

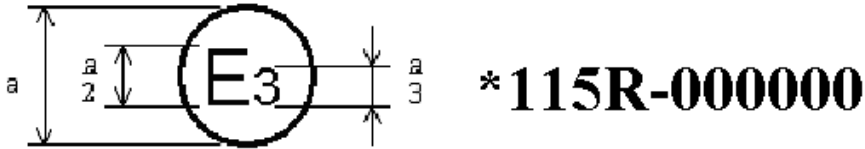

a = 8 mm min

The above approval mark affixed to the plate of CNG retrofit system, shows that it has been approved in Italy (E 3), pursuant to Regulation No. 115, under approval number 000000. The symbol "\*" indicates the CNG retrofit system, the first two digits of the approval number indicate that approval was granted in accordance to the requirement of Regulation No. 115 in its original form.

	
NAME OR TRADE MARK:.....	
TYPE: LPG/CNG	Date: .....
<ul style="list-style-type: none"> <li>• VAPORIZER / REGULATOR .....</li> <li>• GAZ FUELLING SYSTEM .....</li> <li>• SAFETY DEVICE .....</li> <li>• CONTAINER.....</li> <li>• .....</li> <li>• .....</li> <li>• .....</li> </ul>	

The above plate, with approval mark and some technical information on the retrofit system, has to be fixed permanently on the body of the vehicle.

Annex 3A

COMPLETE LIST OF INFORMATION FOR THE PURPOSE OF THE LPG  
RETROFIT SYSTEM INSTALLED ON VEHICLE TYPE APPROVAL

1. Description of the parent vehicle
  - 1.1. Name and address of the manufacturer .....
  - 1.2. Category and identification type.....
  - 1.3. Chassis identification number.....
  - 1.4. Certification number.....
  - 1.5. Internal combustion engine identification type.....
    - 1.5.1. Working principle and thermodynamic cycle .....
    - 1.5.2. Naturally aspirated or pressure charged.....
    - 1.5.3. Displacement .....
    - 1.5.4. Catalyst system type .....
    - 1.5.5. Ignition system type .....
2. Description of the LPG retrofit system
  - 2.1. Trade name or mark.....
  - 2.2. Identification type .....
  - 2.3. Drawing / flow-charts of the installation in the vehicle .....
  - ~~2.4.~~ **"Non-intrusive" system: yes/no 1/**
  - ~~2.5.4.~~ "Master-slave" system: yes/no 1/
  - ~~2.6.5.~~ Vaporiser/pressure regulator(s)
    - ~~2.6.5.1.~~ Make(s) .....
    - ~~2.6.5.2.~~ Type(s) .....
    - ~~2.6.5.3.~~ Certification number .....
    - ~~2.6.5.4.~~ Identification .....
    - ~~2.6.5.5.~~ Drawings .....
    - ~~2.6.5.6.~~ Number of main adjustment points .....
    - ~~2.6.5.7.~~ Description of principle of adjustment through main adjustment points .....
    - ~~2.6.5.8.~~ Number of idle adjustment points .....
    - ~~2.6.5.9.~~ Description of principle of adjustment through idle adjustment points .....
    - ~~2.6.5.10.~~ Other adjustment possibilities: if so and which (description and drawings) .....
    - ~~2.6.5.11.~~ Operating pressure(s): 2/ ..... kPa
  - ~~2.7.6.~~ Mixing piece: yes/no 1/
    - ~~2.7.6.1.~~ Number .....
    - ~~2.7.6.2.~~ Make(s) .....
    - ~~2.7.6.3.~~ Type(s) .....
    - ~~2.7.6.4.~~ Drawings .....
    - ~~2.7.6.5.~~ Place of installation (include drawing(s)) .....
    - ~~2.7.6.6.~~ Adjustment possibilities .....
    - ~~2.7.6.7.~~ Operating pressure(s): 2/ ..... kPa
  - ~~2.8.7.~~ Gas dosage unit: yes/no 1/
    - ~~2.8.7.1.~~ Number .....
    - ~~2.8.7.2.~~ Make(s) .....

Deleted: holder

2.8.7.3.	Type(s) .....	
2.8.7.4.	Drawings .....	
2.8.7.5.	Place of installation (include drawing(s)) .....	
2.8.7.6.	Adjustment possibilities .....	
2.8.7.7.	Operating pressure(s): <u>2/</u> .....	kPa
2.9.8.	Gas injection device(s) or injector(s): yes/no <u>1/</u>	
2.9.8.1.	Make(s) .....	
2.9.8.2.	Type(s) .....	
2.9.8.3.	Identification .....	
2.9.8.4.	Operating pressure(s): <u>2/</u> .....	kPa
2.9.8.5.	Drawings of installation .....	
2.10.9.	Electronic control unit	
2.10.9.1.	Make(s) .....	
2.10.9.2.	Type(s) .....	
2.10.9.3.	Place of installation .....	
2.10.9.4.	Adjustment possibilities .....	
2.11.10.	LPG container	
2.11.10.1.	Make(s) .....	
2.11.10.2.	Type(s) (include drawings) .....	
2.11.10.3.	Number of containers .....	
2.11.10.4.	Capacity .....	litres
2.11.10.5.	LPG fuel pump in container: yes/no <u>1/</u> .....	
2.11.10.6.	Certification number .....	
2.11.10.7.	Drawings of the installation of the container .....	
2.12.11.	LPG container accessories	
2.12.11.1.	<u>80 per cent stop valve:</u>	
2.12.11.1.1.	Make(s) .....	
2.12.11.1.2.	Type(s) .....	
2.12.11.1.3.	Operating principle: float/other <u>1/</u> (include description or drawings)	
2.12.11.2.	<u>Level indicator:</u>	
2.12.11.2.1.	Make(s) .....	
2.12.11.2.2.	Type(s) .....	
2.12.11.2.3.	Operating principle: float/other <u>1/</u> (include description or drawings)	
2.12.11.3.	<u>Pressure relief valve (discharge valve):</u>	
2.12.11.3.1.	Make(s) .....	
2.12.11.3.2.	Type(s) .....	
2.12.11.4.	<u>Pressure relief device:</u>	
2.12.11.4.1.	Make(s) .....	
2.12.11.4.2.	Type(s) .....	
2.12.11.5.	<u>Remote-controlled service valve with excess flow valve:</u>	
2.12.11.5.1.	Make(s) .....	
2.12.11.5.2.	Type(s) .....	
2.12.11.6.	<u>Multi-valve: yes/no <u>1/</u></u>	
2.12.11.6.1.	Make(s) .....	
2.12.11.6.2.	Type(s) .....	

2. <del>12</del> .11.6.3.	Multi-valve description (include drawings) .....	
2. <del>12</del> .11.7.	<u>Ventilation housing:</u> .....	
2. <del>12</del> .11.7.1.	Make(s) .....	
2. <del>12</del> .11.7.2.	Type(s) .....	
2. <del>12</del> .11.8.	<u>Power supply bushing (fuel pump/actuators):</u>	
2. <del>12</del> .11.8.1.	Make(s) .....	
2. <del>12</del> .11.8.2.	Type(s) .....	
2. <del>12</del> .11.8.3.	Drawings .....	
2. <del>13</del> .12.	Fuel pump (LPG): yes/no <u>1</u> /	
2. <del>13</del> .12.1.	Make(s) .....	
2. <del>13</del> .12.2.	Type(s) .....	
2. <del>13</del> .12.3.	Pump mounted in LPG container: yes/no <u>1</u> /	
2. <del>13</del> .12.4.	Operating pressure(s): <u>2</u> / .....	kPa
2. <del>14</del> .13.	Shut-off valve/ non-return valve/gas tube pressure relief valve: .....	yes/no <u>1</u> /
2. <del>14</del> .13.1.	Make(s) .....	
2. <del>14</del> .13.2.	Type(s) .....	
2. <del>14</del> .13.3.	Description and drawings .....	
2. <del>14</del> .13.4.	Operating pressure(s): <u>2</u> / .....	kPa
2. <del>15</del> .14.	Filling point: <u>1</u> /	
2. <del>15</del> .14.1.	Make(s) .....	
2. <del>15</del> .14.2.	Type(s) .....	
2. <del>15</del> .14.3.	Description and drawings .....	
2. <del>16</del> .15.	Flexible fuel hose(s)/pipes:	
2. <del>16</del> .15.1.	Make(s) .....	
2. <del>16</del> .15.2.	Type(s) .....	
2. <del>16</del> .15.3.	Description .....	
2. <del>16</del> .15.4.	Operating pressure(s): <u>2</u> / .....	kPa
2. <del>17</del> .16.	Pressure and temperature sensor(s): <u>1</u> /	
2. <del>17</del> .16.1.	Make(s) .....	
2. <del>17</del> .16.2.	Type(s) .....	
2. <del>17</del> .16.3.	Description .....	
2. <del>17</del> .16.4.	Operating pressure(s): <u>2</u> / .....	kPa
2. <del>18</del> .17.	LPG filter unit(s): <u>1</u> /	
2. <del>18</del> .17.1.	Make(s) .....	
2. <del>18</del> .17.2.	Type(s) .....	
2. <del>18</del> .17.3.	Description .....	
2. <del>18</del> .17.4.	Operating pressure(s): <u>2</u> / .....	kPa
2. <del>19</del> .18.	Service coupling(s) (mono-fuel vehicle without limp-home system): <u>1</u> /	
2. <del>19</del> .18.1.	Make(s) .....	
2. <del>19</del> .18.2.	Type(s) .....	
2. <del>19</del> .18.3.	Description and drawings installation .....	
2. <del>20</del> .19.	Connection to LPG system for heating system (allowed for M <sub>2</sub> and M <sub>3</sub> categories of vehicles): yes/no <u>1</u> /	
2. <del>20</del> .19.1.	Make(s) .....	
2. <del>20</del> .19.2.	Type(s) .....	

- 2.20.19.3. Description and drawings of installation .....
- 2.21.20. Further documentation
- 2.21.20.1. Description of the LPG **equipment** and the physical safeguarding of the catalyst at switch-over from petrol to LPG or back.
- 2.21.20.2. System lay-out (electrical connections, vacuum connections compensation hoses, etc.)
- 2.21.20.3. Drawing of the symbol
- 2.21.20.4. Adjustment data
- 2.22.21. Cooling system: (liquid/air) 1/
- 2.22.21.1. System description/drawings with regard to the LPG **equipment**

Formatted: Highlight

Formatted: Highlight

**3 Description of each vehicle/engine for which the retrofit system is qualified**

Formatted: Space After: 0 pt

**3.1. Name and address of the manufacturer.....**

**3.2. Category and class .....**

**3.3. Emission requirements**

*- for M1, N1 vehicle: Regulation 83, .....series of amendments, level A (2000), B (2005); Directive 70/220/EEC as amended by Directive ..... level A (2000), B (2005).*

*-for M2, M3, N2, N3 vehicle: Regulation 49, .....series of amendments, row A (2000), B1 (2005), B2 (2008), C (EEV); Directive 88/77/EEC as amended by Directive ..... row A (2000), B1 (2005), B2 (2008), C (EEV).*

**3.4. Maximum net power.....**

**3.5. Number of cylinders**

**3.6. Fuel feed and combustion process (direct or indirect, single-point or multi-point).**

**3.7. Catalyst type, (three-way, oxidation, deNOx).....**

**3.7.1. Air injection (with or without).....**

**3.7.2. Exhaust gas recirculation (with or without).....”**

Deleted: engine

Deleted: or direct injection

Formatted: Font: (Default) Arial, 11 pt, English (U.S.)

Deleted:

Deleted: ¶

1/ Strike out what does not apply.

2/ Specify the tolerance.

Annex 3B

COMPLETE LIST OF INFORMATION FOR THE PURPOSE OF THE CNG RETROFIT  
SYSTEM INSTALLED ON VEHICLE TYPE APPROVAL

1. Description of the parent vehicle
  - 1.1. Name and address of the manufacturer .....
  - 1.2. Category and identification type .....
  - 1.3. Chassis identification number .....
  - 1.4. Certification number .....
  - 1.5. Internal combustion engine identification type .....
  - 1.5.1. Working principle and thermodynamic cycle .....
  - 1.5.2. Naturally aspirated or pressure charged .....
  - 1.5.3. Displacement .....
  - 1.5.4. Catalyst system type .....
  - 1.5.5. Ignition system type .....
2. Description of the CNG retrofit system
  - 2.1. Trade name or mark holder .....
  - 2.2. Identification type .....
  - 2.3. Drawing / flow-charts of the installation in the vehicle .....
  - ~~2.4. "Non-intrusive" system: yes/no 1/~~
  - 2.5.4. "Master-slave" system: yes/no 1/
  - 2.6.5. Pressure regulator(s)
    - 2.6.5.1. Make(s) .....
    - 2.6.5.2. Type(s) .....
    - 2.6.5.3. Certification number .....
    - 2.6.5.4. Identification .....
    - 2.6.5.5. Drawings .....
    - 2.6.5.6. Number of main adjustment points .....
    - 2.6.5.7. Description of principle of adjustment through main adjustment points .....
    - 2.6.5.8. Number of idle adjustment points .....
    - 2.6.5.9. Description of principle of adjustment through idle adjustment points .....
    - 2.6.5.10. Other adjustment possibilities: if so which (description and drawings) .....
    - 2.6.5.11. Operating pressure(s): 2/ ..... kPa
  - 2.7.6. Gas / air mixer (carburettor): yes/no 1/
    - 2.7.6.1. Number .....
    - 2.7.6.2. Make(s) .....
    - 2.7.6.3. Type(s) .....
    - 2.7.6.4. Drawings .....
    - 2.7.6.5. Place of installation (include drawing(s)) .....
    - 2.7.6.6. Adjustment possibilities .....
    - 2.7.6.7. Operating pressure(s): 2/ ..... kPa
  - 2.8.7. Flow gas adjuster: yes/no 1/
    - 2.8.7.1. Number .....
    - 2.8.7.2. Make(s) .....

- 2-~~8~~.7.3. Type(s) .....
- 2-~~8~~.7.4. Drawings .....
- 2-~~8~~.7.5. Place of installation (include drawing(s)) .....
- 2-~~8~~.7.6. Adjustment possibilities .....
- 2-~~8~~.7.7. Operating pressure(s): 2/ ..... kPa
- 2-~~9~~.8. Gas /air mixer (injector): yes/no 1/
- 2-~~9~~.8.1. Make(s) .....
- 2-~~9~~.8.2. Type(s) .....
- 2-~~9~~.8.3. Identification .....
- 2-~~9~~.8.4. Operating pressure(s): 2/ ..... kPa
- 2-~~9~~.8.5. Drawings of installation .....
- 2-~~10~~.9. Electronic control unit
- 2-~~10~~.9.1. Make(s) .....
- 2-~~10~~.9.2. Type(s) .....
- 2-~~10~~.9.3. Place of installation .....
- 2-~~10~~.9.4. Adjustment possibilities .....
- 2-~~11~~.10. CNG container
- 2-~~11~~.10.1. Make(s) .....
- 2-~~11~~.10.2. Type(s) (include drawings) .....
- 2-~~11~~.10.3. Number of containers .....
- 2-~~11~~.10.4. Total capacity ..... litres
- 2-~~11~~.10.5. Certification number .....
- 2-~~11~~.10.6. Drawings of the installation of the container .....
- 2-~~12~~.11. CNG container accessories
- 2-~~12~~.11.1. Level or pressure indicator:
- 2-~~12~~.11.1.1 Make(s) .....
- 2-~~12~~.11.1.2. Type(s) .....
- 2-~~12~~.11.2. Pressure relief valve (discharge valve) 1/:
- 2-~~12~~.11.2.1. Make(s) .....
- 2-~~12~~.11.2.2. Type(s) .....
- 2-~~12~~.11.3. Pressure relief device:
- 2-~~12~~.11.3.1. .... Make(s)
- 2-~~12~~.11.3.2. .... Type(s)
- 2-~~12~~.11.4. Remote controlled automatic valve with excess flow valve:
- 2-~~12~~.11.4.1. .... Make(s)
- 2-~~12~~.11.4.2. .... Type(s)
- 2-~~12~~.11.5. Gas-tight housing:
- 2-~~12~~.11.5.1. .... Make(s)
- 2-~~12~~.11.5.2. .... Type(s)
- 2-~~13~~.12. Automatic valve/check valve: yes/no 1/
- 2-~~13~~.12.1. Make(s) .....
- 2-~~13~~.12.2. Type(s) .....
- 2-~~13~~.12.3. Description and drawings .....
- 2-~~13~~.12.4. Operating pressure(s): 2/ ..... kPa
- 2-~~14~~.13. Filling unit: 1/



- 2.~~14~~.13.1. Make(s) .....
- 2.~~14~~.13.2. Type(s).....
- 2.~~14~~.13.3. Description and drawings.....
- 2.~~15~~.14. Flexible fuel lines or hose(s):
- 2.~~15~~.14.1 Make(s) .....
- 2.~~15~~.14.2. Type(s).....
- 2.~~15~~.14.3. Description .....
- 2.~~15~~.14.4. Operating pressure(s): 2/ ..... kPa
- 2.~~16~~.15. Pressure and temperature sensor(s): 1/
- 2.~~16~~.15.1. Make(s) .....
- 2.~~16~~.15.2. Type(s).....
- 2.~~16~~.15.3. Description .....
- 2.~~16~~.15.4. Operating pressure(s): 2/ ..... kPa
- 2.~~17~~.16. CNG filter: 1/
- 2.~~17~~.16.1. Make(s) .....
- 2.~~17~~.16.2. Type(s).....
- 2.~~17~~.16.3. Description .....
- 2.~~17~~.16.4. Operating pressure(s): 2/ ..... kPa
- 2.~~18~~.17. Service coupling(s) (mono-fuel vehicle without limp-home system): 1/
- 2.~~18~~.17.1. Make(s) .....
- 2.~~18~~.17.2. Type(s).....
- 2.~~18~~.17.3. Description and drawings installation.....
- 2.~~19~~.18. Connection to CNG system for heating system (allowed for M<sub>2</sub> and M<sub>3</sub> category of vehicles only): yes/no 1/
- 2.~~19~~.18.1. Make(s) .....
- 2.~~19~~.18.2. Type(s).....
- 2.~~19~~.18.3. Description and drawings installation.....
- 2.~~20~~.19. Further documentation
- 2.~~20~~.19.1. Description of the CNG equipment and the physical safeguarding of the catalyst at switch-over from petrol to CNG or back.
- 2.~~20~~.19.2. System lay-out (electrical connections, vacuum connections compensation hoses, etc.)
- 2.~~20~~.19.3. Drawing of the symbol
- 2.~~20~~.19.4. Adjustment data
- 2.~~21~~.20. Cooling system: (liquid/air) 1/
- 2.~~21~~.20.1. System description/drawings with regard to the CNG equipment .....

1/ Strike out what does not apply.

2/ Specify the tolerance.

Annex 4

DESCRIPTION OF THE LEAKAGE TEST PROCEDURES FOR  
CNG/LPG SYSTEMS INSTALLED ON VEHICLES

1. Scope

To describe the procedures to be undertaken by the installer to verify the gas tightness of the system.
2. The installation of the system shall be done in accordance with the installation manual provided by the retrofit system manufacturer, Part I and II.
3. Leakage test procedure for LPG systems
  - 3.1. When the installation has been completed, the installer shall follow the proper assembly check, paragraph 7.1.4.2. and the start-up procedures described in paragraph 7.1.4.3. After that the system has been filled-up with LPG; it is necessary to check with a gas detector or a leakage fluid detector all the fittings and connections of the system. The solenoid valves must be in open position in order to subject all the components of the system to the service pressure. No evidence of leakage is permitted.
4. Leakage test procedures for CNG systems
  - 4.1. When the installation has been completed, the installer shall follow the proper assembly check, paragraph 7.1.4.2. and the start-up procedures described in paragraph 7.1.4.3. After that the system has been filled-up with CNG, at the service pressure; it is necessary to check with a gas detector or a leakage fluid detector all the fittings and connections of the system. The solenoid valves must be in open position in order to subject all the components of the system to the service pressure. No evidence of leakage is permitted.

Annex 5

PRESCRIPTIONS CONCERNING THE FIXATION OF LPG AND CNG CONTAINER(S)

1. The requirements of Regulation No. 67, 01 series of amendments, concerning the fixation of LPG container(s) or those of Regulation No. 110 concerning the fixation of CNG container(s) shall be deemed to be met if the container is secured to the motor vehicle by at least:
  - 1.1. two straps per container,
  - 1.2. four bolts, and
  - 1.3. appropriate washers or plates if the body panels at that location are single thickness;

Assuming that the material grade is Fe 370, the fixing bolts shall be of class 8.8, and have the dimensions specified in Table 1 below:

Table 1

Container content [litres]	Minimum dimensions of the washers or plates [mm]	Minimum dimensions of the container straps [mm]	Minimum diameter of bolts [mm]
up to 85	round: 30 x 1.5 round: 25 x 2.5	20 x 3 30 x 1.5	8
85 - 100	round: 30 x 1.5 round: 25 x 2.5	30 x 3 20 x 3 */	10 8 */
100 - 150	round: 50 x 2 round: 30 x 3	50 x 6 50 x 3 **/	12 10 **/
more than 150	shall meet the provisions of Regulation No. 67, 01 series of amendments, for LPG containers, or Regulation No. 110 for CNG containers		

\*/ In this case the container shall be secured by at least three container straps.

\*\*/ In this case the container shall be secured by at least four container straps.

2. If the container is installed behind a seat, a total clearance of at least 100 mm, in the longitudinal direction of the vehicle, shall be provided. This clearance may be divided between the container and the rear panel of the vehicle and between the seat and the container.
3. If the container straps also carry the mass of the fuel container, at least three container straps shall be provided.
4. The container straps shall ensure that the fuel container will not slide, rotate or be dislodged.

5. A protective material such as felt, leather or plastic shall be interposed between the fuel container and the container straps. However, at the location of the fixation of the washers or plates to the vehicle body no compressible material should be present.
6. Container frame
  - 6.1. If the container is secured to the motor vehicle by a container frame, the container frame, the container straps, washers, or plates and bolts used shall meet the provisions of paragraphs 1. to 5. above.
  - 6.2. If the cylindrical container is installed longitudinally to the vehicle, a transverse connection shall be present at the front of the container frame to prevent slipping of the container. This transverse connection shall be:
    - 6.2.1. at least of the same thickness as the container frame,
    - 6.2.2. at least 30 mm high and its top is at least 30 mm above the bottom of the container,
    - 6.2.3. as close as possible, or even within, the domed end of the container.

By "installed longitudinally" it is meant that the axis of the cylindrical fuel container makes an angle of no more than 30 degrees with the longitudinal centre plane of the vehicle."