

# Designer Vent Free Fireboxes

LIFETIME  
MONESSEN  
LIMITED  
WARRANTY



*GSTF36 See-Thru Vent Free Firebox shown above with optional polished brass louvers and DST Gas Logs.  
GSTF36 See-Thru Vent Free Firebox shown beside with optional brushed pewter arch, frame and fire screen doors; and DST Gas Logs.*

Save  
on Home  
Heating with a  
99% Heat  
Efficient  
Vent-Free  
Fireplace

## GSTF36 See-Thru, GPF36 Peninsula and GRCF36/GLCF36 Vent Free Fireboxes

### GSTF36 See-Thru Features:

- Full size 36" hearth opening and 24" depth
- Two fireplaces in one
- Standard black louvers for circulating installation
- Radiant face panels included to convert a circulating fireplace into a radiant fireplace in seconds
- Cottage clay firebrick is standard
- Includes black hood, junction box and thermal sensor for blower accessory
- Smartline field-installed accessories include brass and pewter louvers; decorative arched fronts, frames, firescreen doors and filigree panels in gold tone, brushed pewter and black; and a variable thermostat controlled blower

- Limited lifetime warranty
- CSA design certified

*Heat with  
Personality.*

**MONESSEN**  
**HEARTH SYSTEMS**

# DESIGNER SERIES



*GFP36 Peninsula Vent Free Firebox shown with optional DST Gas Logs.*

## **GFP36 Peninsula Features:**

- Full size 36" hearth opening and 24" depth
- Contemporary peninsula design offers a three-sided viewing area for a dramatic way to divide or accent any room
- Standard glass end panel
- Standard black louvers for circulating installation
- Radiant face panels included to convert a circulating fireplace to a radiant fireplace in seconds
- Cottage clay firebrick is standard
- Includes black hood, junction box and thermal sensor for blower accessory
- Smartline field installed accessories include brass louvers, pewter louvers, brass hood and a variable thermostat controlled blower
- Lifetime limited warranty
- CSA design certified




## **GRCF36/GLCF36 Corner**

### **Features:**

- Full size 36" hearth opening and 24" depth with standard wire mesh screens
- Right and left corners offer maximum versatility
- Stylish modern appearance enhances the look of any room; providing several options for adding a fireplace to a room with limited wall space
- Standard black louvers for circulating installation only
- Cottage clay firebrick is standard
- Includes black hood, junction box and thermal sensor for blower accessory
- Smartline field installed accessories include brass louvers, pewter louvers, brass hood and a variable speed blower
- Limited lifetime warranty
- CSA design certified

*GLCF36 Corner Vent Free Firebox shown with optional DST Gas Logs.*

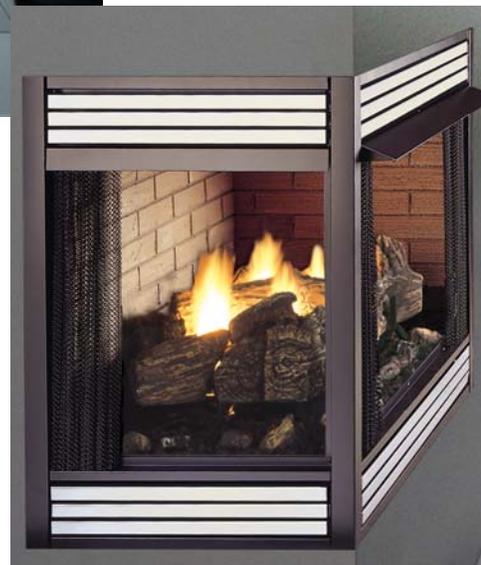

*Corner Firebox shown with optional pewter louvers and DST Gas Logs.*



*DST Vent Free Gas Logs - Side A*



*DST Vent Free Gas Logs - Side B*

### **DST Multi-Sided Gas Log Features:**

- Multi-sided designer yellow flame burner and fiber ceramic log set for use with See-Thru, Peninsula and Corner Fireboxes
- 38,000 Btu dual burner system
- 30" artistically crafted multi-log design
- Millivolt control valve with on/off switch and variable flame height control
- Matchless piezo ignition and safety pilot system
- Limited lifetime warranty
- CSA design certified

# OPTIONAL ACCESSORIES & SPECIFICATIONS

Product Specifications												
Model	Width		Height		Depth		Minimum Hearth Area			Hearth Opening (Sq. In.)	Radiant or Circulating	Design Certified
	Actual	Framing	Actual	Framing	Actual	Framing	A	B	C			
GSTF36	39-1/2"	40"	37-3/4"	38"	23-3/4"	22-1/2"	36"	20-1/4"	21-1/2"	774	Both	CSA
GPF36	39-1/2"	39"	37-3/4"	38"	23-3/4"	22-1/2"	36"	20-1/4"	21-1/2"	774	Both	CSA
G(R/L)CF36	39-1/2"	39"	37-3/4"	38"	23-3/4"	23-1/8"	36"	20-1/4"	21-1/2"	774	Circulating	CSA


## OPTIONAL ACCESSORIES



Brass Louvers



Pewter Louvers



Brass Hood



Variable Thermostat Controlled Forced Air Blower

- Decorative arched fronts, frames, firescreen doors and filigree available in gold tone, brushed pewter and black (GSTF36 Only)

## GAS LOGS ACCESSORIES

- Decorative Fiber Ceramic Embers and Cinders
- Extra Volcanic Rock
- Stainless Steel Flexible Gas Connector
- Damper Clamps

### For Remote Operation:



On/Off Hand-Held Remote Control with Receiver.



On/Off Hand-Held Remote Control with 90 min. countdown timer with Receiver.



On/Off Thermostat Hand-Held Remote Control with Receiver.



Hand-Held Programmable Thermostat Remote Control with Receiver.



On/Off Thermostat Hand-Held Remote Control with 3-Speed Blower Control with Receiver.



Touch Light™ Table Top/Wall Mount TLM On/Off and TLT Thermostat Remote Control with Receiver.



Programmable Wireless Wall Thermostat with receiver.

## REGULATORY APPROVAL

The DST series of vent free gas logs have been tested and approved by CSA as an unvented room heater to the latest ANSI Z21.11 and I.A.S. US5-95 requirements. These units also comply with ANSI Z21.60-1991 "Decorative Gas Appliances" for solid-fuel burning fireplaces. These gas logs are intended for installation into solid-fuel burning fireplaces, or CSA approved unvented fireplaces and are also approved for installation in an aftermarket manufactured (mobile) home, where not prohibited by state or local codes.

The Designer Series fireboxes have been tested and approved to the Z21-91 standard for ventless firebox enclosures.

# MONESSEN HEARTH SYSTEMS

149 Cleveland Drive • Paris, Kentucky 40361  
www.monessenhearth.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.

© 2006 Monessen Hearth Systems, Inc.




MADE IN U.S.A.



VFDesigner-MHS4506

## Minimum Hearth Area



Note: Please see Product Specification Chart above.

## Gas Log Minimum Hearth Area (refer to drawing)


	A	B	C
DST Gas Logs	36"	20-1/4"	21-1/2"

## Optional Gas Log Product Specifications

Model	Log Size	Fuel Type	Millivolt Control	Approx. Heating Area (Sq. Ft.)	Approx. Cost to Operate* Per Hour (Low-High)
DST30NV	30"	NG	24,000-38,000	1,300	24¢-38¢
DST30PV	30"	LP	31,000-38,000	1,300	31¢-38¢

\* Based on 2003 Dept. of Energy National Average Energy Cost for lowest and highest Btu operation.

## Vent Free Fireplace Framing Dimensions



	GSTF36	GPF36	G(R/L)CF
A	19"	19"	21"
B	22-1/2"	22-3/4"	-
B²	-	-	23-1/8"
C	40"	-	-
C²	-	39"	39"
D	38"	38"	38"

Please refer to the installation manual for more detailed framing instructions.

### Warning:

- It is recommended that the screen be used during operation of this log set. Always ensure the screen has adequate spaces to allow for passage of combustion air to the gas log set.
- Correct installation of the ceramic fiber logs, proper location of the heater and periodic cleaning are necessary to avoid potential service problems with sooting.
- Keep small children and animals away from the open flame of the gas log set at all times.
- There may be a start-up odor associated with the heating of the logs. The odor should diminish in 2-3 hours of operation with the burner at its highest setting with the fan in the off position.

Sold by: