#### TROUBLESHOOTING

- When the image does not appear on the screen, check the power source for the monitor and camera.
  Make sure that the voltage and polarity are properly connected and correctly supplied.
- When the image is too dim, check if the lens is stained.If dirty, clean the lens with a clean soft cloth. If clean, adjust the back focus of the lens.
- 3. When the camera does not work properly, the camera housing is too hot or black lines appear on the screen, check if you have connected the camera to a proper power source. If there is no problem with the power connection, turn the camera off immediately and contact our service department for assistance.
- 4. When the screen blinks too much, check if the camera is facing directly toward the sun or a fluorescent light. If so, adjust the angle or location of the camera.

#### WARRANTY

- Products are supplied with 3 year limited warranty from the date of purchase.
  We will repair or replace the defective item with a new or factory rebuilt replacement
- Transportation of the product to our service center is the responsibility of the user.Repaired or replaced product will be returned prepaid during the warranty period.
- 3. This warranty applies to the original purchaser only.
- This warranty will be invalid if unauthorized repair or modifications are made to the unit or in any case of accident, misuse or damage caused by improper installation or altered serial numbers.
- 5. The liability of the company has limited the cost of repair/replacement of the unit under warranty.
- If you need warranty service, please return the product to your distributor/dealer. Proof of pruchase may be required.

#### WARRANTY CARD

PRODUCT NAME				WARRANTY YEAR	
DATE OF PURCHASE	/ DAY /M /Y			2.VEAD	
WARRANTY DATE				3 YEAR	
ADDRESS OF CUSTOMER		NAME			
		TEL			
CONTACT		NAME			
		AGENT			
		TEL			

- Please read the instruction manual again before asking for the A/S
- Please explain exacity what the problem you have is,




## **User's Manual**

## lkegami

# MINI CORNER MOUNT CAMERA

1/3" Sony Super HADII CCD

ICD-E11












#### **FEATURES**

- High Resolution 630TV Lines
- Fixed Board Lens (Options)
- Corner Mount Camera (IP66)
- 0 Lux for Infrared Lighting Conditions


Ikegami Electronics (U.S.A.), Inc. 37 Brook Avenue, Maywood, N. J. 07607-1195 ph: (201) 368-9171 fax (201) 569-1626 [URL: www.ikegami.com]

## SETTING & INSTALLATION




## **SPECIFICATIONS**

ITEM		NTSC	PAL		
Total Pixels		811(H) x 508(V)	795(H) x 596(V)		
Effective Pixels		768(H) x 494(V)	752(H) x 582(V)		
Sensor		1/3" Sony Super HADII CCD			
Scanning System		2:1 Interlace			
Frequency		Horizontal :15.734KHzVertical : 59.94Hz   Horizontal :15.625KHzVertical : 50.00			
Resolution		More than 630 TV Lines			
	Video Output	1.0Vp-p Composite Signal ( 75ohm )			
	AGC	ON			
	S/N (Y signal)	52dB or more (AGC OFF)			
Ε	Min.Illumination	0 Lux for Infrared Lighting Conditions			
L	White Balance	ATW			
Ε	Electronic shutter speed	1/60s - 1/100,000s	1/50s - 1/100,000s		
С	3D-DNR	ON			
Т	D&N Selection	EXT			
R	BLC	OFF			
- 1	D-WDR	OFF			
С	HLM	OFF			
Α	Defect Pixel Compensation	OFF			
L	IR SMART	OFF			
	Motion Detection	OFF OFF			
	Privacy Masking				
	MIRROR	OFF			
	SHARPNESS	OFF			
IR LEDs		6 IR LEDs			
Lens Mount		2.97mm Fixed Board Lens			
Operating temperature/Humidity		-10°C∼+50°C / 0∼80% RH			
Power Supply		DC12V 110mA (CDS ON : 170mA)			
Dimensions		120(H) x 120(W) x 90(D)mm			
Weight		Аррх. 320g			

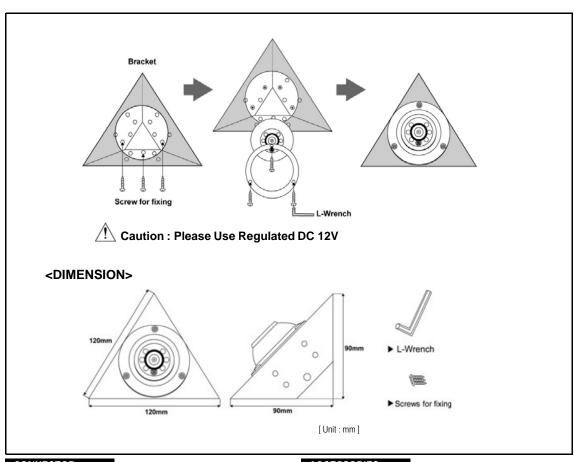

### CONNECTOR



### ACCESSORIES

