



HEAT & GLO™
Where everything comes together




NorthStar™
EPA Phase II
Woodburning Fireplace


NorthStar Specifications

MODEL	HEIGHT		FRONT WIDTH		BACK WIDTH		DEPTH		VIEWING AREA
	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	
NorthStar	43-13/16"	43-7/8"	40"	42"	40"	42"	23-1/8"	24"	29-1/4" x 16-3/4"

Top View
Corner Installation

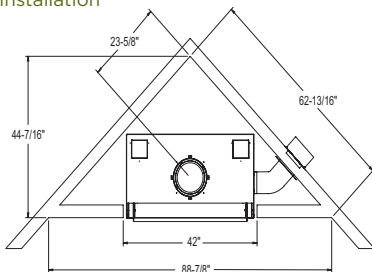




Top View

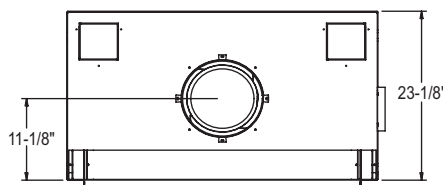

Front View

Side View

Framing

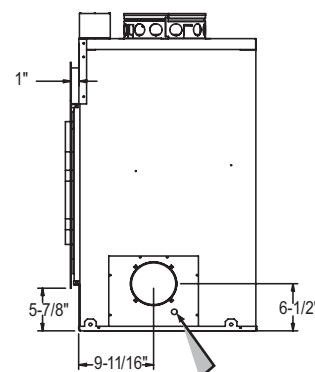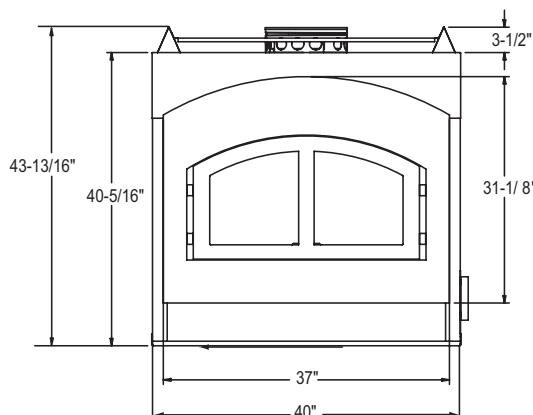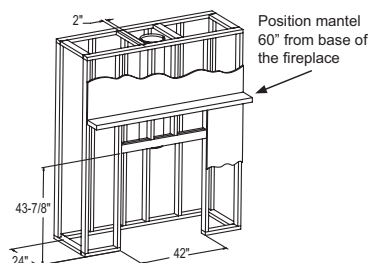

Dimensions above are in inches, and for reference only. We recommend measuring individual units at installation. Assumes the use of 1/2" Sheetrock. NOTE: Combustible material should not be installed over the face of the fireplace. Make sure you do NOT cover the decorative door opening.

Product information is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury. Actual product appearance, including flame, may differ from product images.

NorthStar™

Meets the strictest environmental standards in the country. Now you can love the environment and love a woodburning fireplace, all at the same time. Certified to the EPA Phase II criteria, NorthStar can be installed in areas where conventional woodburning fireplaces are banned. It burns clean. Burns efficient. In fact, it delivers over 50,000 Btus of heat per hour for up to 10 hours with over 77.8% efficiency.*

- **EPA Certified to 51,400 Btu/hour**—Actual output up to 70,000 Btu/hour; environmentally friendly—can operate in woodburning-restricted areas. Generous heat output.
- **Air-tight ceramic glass doors**—Maintain energy efficiency and clean burn.
- **Cast iron door and grilles**
- **Fully insulated firebox**—Keeps warm air in and cold air out.
- **Dual blowers standard**—Heat circulation, maximum air flow
- **Arched steel face**
- **Firebrick lining**—Authentic masonry look and enhanced heat radiation.
- **Optional Heat Zone kit**

* Btu's of cord wood fuel are to be used as a guideline only and may differ due to type of wood and moisture content.

For warranty details, go to www.heatnglo.com.

For complete information on this model, please contact us at:

Decorative Fronts

The doors are available in all black or black with brushed nickel trim.



Black with brushed nickel trim

Heat Zone®

Heat Zone climate control system turns your fireplace into a flexible, energy-saving heat source by transferring excess heat from your fireplace to other areas of your home.

HEAT&GLO

Where everything comes together

A brand of Hearth & Home Technologies, Inc.

20802 Kensington Boulevard, Lakeville, MN 55044

Web: heatnglo.com

Phone: (888) 427-3973 (952) 985-6000

E-mail: info@heatnglo.com



HNG-1035U-1206