

BUSINESS AND HOME SECURITY

PORTABLE COLOR LCD DIGITAL WIRELESS MONITORING SYSTEM

Ultra Digital Wireless



FEATURES

- 2.4" Color LCD Monitor/Receiver
- Latest Ultra Digital Wireless Technology Provides Excellent Image Quality and Clarity
- Secure signal ensures complete privacy
- Interference free
- Connect to any TV/Monitor/VCR/DVD Recorder
- Listen in with Exceptional Sound Clarity
- True Portability with Receiver's Rechargeable Battery
- Camera Can be Battery Operated for True Portable Wireless Operation
- Up to 450ft (150m) Wireless Transmission Range**
- Night Vision Allows for Low Light Viewing up to 15ft from Camera***
- Safety Warning Feature Notifies You When out of Range
- Audio Level Indicator and Alarm
- Convenient Receiver Charging Cradle and Belt Clip Included

*Additional cameras sold separately.


**Maximum outdoor open space transmission range. Actual range including indoor use dependent upon building materials and other obstructions in path of wireless signal

***IR illumination range of 15ft (5m) under ideal conditions. Objects at or beyond this range may be partially or completely obscured, depending on the camera application

EXPANDIBLE UP TO
FOUR CAMERAS



CONNECTS TO ANY TV

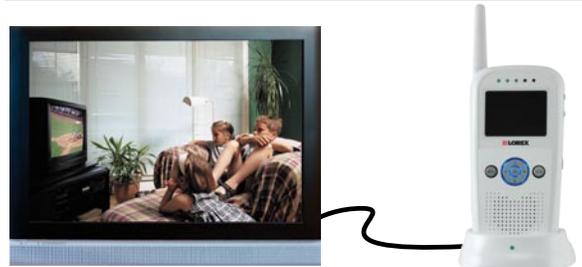

 **LOREX**[®]

www.lorexctv.com

LW2002W Series

PORTABLE COLOR LCD DIGITAL WIRELESS MONITORING SYSTEM

SPECIFICATIONS

General

Transmission Frequency:	ISM 2,400~2,482 MHz
Transmission Power:	14dBm
Unobstructed Effective Range:	450ft / 150m
Spread Spectrum:	FHSS
Modulation Mode:	GFSK
Operating Temperature:	14 ~ 104° Fahrenheit / - 10 ~ +40° Celsius
Operating Humidity:	<85%

Camera

Imaging Sensor Type:	CMOS
Picture Total Pixels:	640 x 480pxl (NTSC)
Minimum Illumination:	0Lux (IR on)
Night Video Distance:	15ft / 5m
View Angle:	50°
Image Resolution:	640 x 480 @ 30fps
Consumption Current (Max.):	360mA
Power Supply:	DC + 9V
Dimensions (W x D x H):	83x65x135mm / 3.3x2.6x5.3"
Weight:	140g / 0.3lbs

Receiver

LCD Screen Type:	2.36" TFT-LCD
Effective Pixels:	320 x 240
Receiving Sensitivity:	<.81dBm
Consumption Current (Max.):	400mA
Power Supply:	DC + 9V
Dimensions (W x D x H):	73x33x195mm / 2.9x1.3x7.7"
Weight:	180g / 0.4lbs



PRODUCT INFORMATION

UPC:	LW2002W (NTSC version) - 7-78597-12002-8
	LW2002WF (Universal Package) - 7-78597-22002-5
	LW2002WP (PAL version) - 7-78597-62002-3
Package Weight:	0.94kg / 2.0lbs
Package Dimensions:	298mm/11.73"(w) x 81mm/3.19"(d) x 235mm/9.25"(h)
Package Cube:	0.005cbm / 0.20cbf

CONTENTS

LW2002W/ LW2002WF/ LW2002WP	1 x 2.4" LCD receiver 1 x Indoor camera with night vision 1 x Power adaptor for receiver 1 x Power adaptor for camera 1 x Receiver Charging Cradle 1 x RCA Video Cable
--	---

ACCESSORIES

LW2002BAC1	black accessory camera
UPC:	7-78597-42002-9
Package Dimensions:	215mm/8.5"(w) x 74mm/2.9"(d) x 91mm/3.6"(h)
Package Weight:	0.36kg / 0.8lb
LW2002WAC1	white accessory camera
UPC:	7-78597-52002-6
Package Dimensions:	215mm/8.5"(w) x 74mm/2.9"(d) x 91mm/3.6"(h)
Package Weight:	0.36kg / 0.8lb



Lorex Technology Inc.

300 Alden Road, Markham,
Ontario L3R 4C1
Canada.

3700 Koppers Street
Baltimore, Maryland 21227,
USA.

©2008 Lorex Technology Inc.
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE
6-26082008