



US005911362A

# United States Patent [19]

[11] Patent Number: **5,911,362**

Wood et al.

[45] Date of Patent: **Jun. 15, 1999**

- [54] **CONTROL SYSTEM FOR A MOBILE MATERIAL DISTRIBUTION DEVICE**
- [75] Inventors: **John E. Wood**, Franklin; **Joel T. Morton**, Springfield, both of Ill.
- [73] Assignee: **DICKEY-john Corporation**, Auburn, Ill.
- [21] Appl. No.: **08/806,610**
- [22] Filed: **Feb. 26, 1997**
- [51] Int. Cl.<sup>6</sup> ..... **B05B 9/06**
- [52] U.S. Cl. .... **239/1; 239/71; 239/127; 239/155; 239/161**
- [58] Field of Search ..... **239/1, 71, 76, 239/146, 147, 155, 156, 157, 124, 161, 163, 172, 127, 318**

Raven Industries, SCS 700 Installation and Service Manual, undated.  
 Raven Industries, SCS 750 Chemical Injection System, undated sales brochure.  
 Micro-Trak Systems, Inc., Flowtrak Sprayer Monitor, 1992 sales brochure.  
 Micro-Trak Systems, Inc., Sprayer Control Systems, 1991 sales brochure.  
 Micro-Trak Systems, Inc., Trak-Net, Modular Control and Monitoring Systems Installation and Operator's Manual, 1992.  
 Hiniker Company, 8100 Control System, undated sales brochure.


*Primary Examiner*—Andres Kashnikow  
*Assistant Examiner*—Lisa A. Douglas  
*Attorney, Agent, or Firm*—Leydig, Voit & Mayer, Ltd.

## [57] ABSTRACT

A control system is provided for efficiently regulating the discharge of material from a mobile material distribution device having a product tank or bin, a boom with at least one boom section, a plurality of outlet ducts (e.g., nozzles and/or distribution ports) associated with each boom section, shut-off valves for selectively enabling each boom section, and a selectively-movable control valve for regulating the flow of material to the boom sections. The control system includes a boom sensing input for monitoring whether the shut-off valves are open or closed (i.e., whether the associated boom sections are enabled or disabled), and a processing system for maintaining a substantially stable pressure level between the control valve and each shutoff valve by positionally locking the control valve at its last controlled position upon receiving a signal from the boom sensing input indicating the shut-off valves are closed. Based information received from the boom sensing input, other feedback sensors, and/or manually entered by the user, the processing system selectively regulates the control valve of the material distribution device so as to precisely regulate the material dispersal rate through the enabled boom sections and to provide the material distribution device with certain useful functions including loading, unloading, and agitation features.

- [56] **References Cited**
- U.S. PATENT DOCUMENTS**
- Re. 35,100 11/1995 Monson et al. .... 111/130
- 2,774,626 12/1956 Gerbracht ..... 239/157
- 3,163,173 12/1964 Kuntz ..... 137/93
- 3,256,901 6/1966 Kline, Jr. .... 137/93
- 3,256,902 6/1966 Porter ..... 137/93
- (List continued on next page.)
- FOREIGN PATENT DOCUMENTS**
- 1583794 2/1981 European Pat. Off. .
- 0414045A1 2/1991 European Pat. Off. .
- 528396 2/1993 European Pat. Off. .
- (List continued on next page.)
- OTHER PUBLICATIONS**
- Midwest Technologies, Inc., The Mid-Tech ISC 3500 Farm Chemical Injection Sprayer Control System, undated sales brochure.
- Raven Industries, SCS 440 Installation and Service Manual, undated.
- Raven Industries, SCS 460 Installation and Service Manual, undated.

**20 Claims, 13 Drawing Sheets**

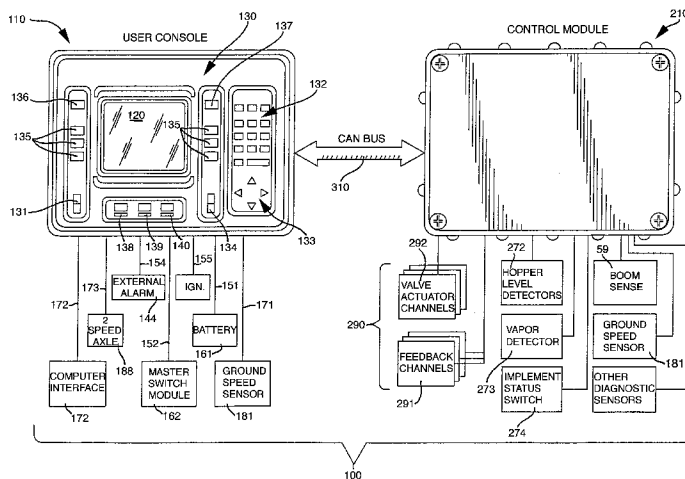



## U.S. PATENT DOCUMENTS

3,638,860	2/1972	Carlyon, Jr. ....	239/127
3,819,298	6/1974	Hadnagy et al. ....	417/44
3,942,082	3/1976	Hadnagy ....	318/51
4,005,803	2/1977	Kent ....	222/57
4,015,366	4/1977	Hall, III ....	239/69
4,093,107	6/1978	Allman et al. ....	239/74
4,138,063	2/1979	Batts ....	239/168
4,210,175	7/1980	Daniels et al. ....	137/564.5
4,274,585	6/1981	Lestradet ....	239/124
4,277,022	7/1981	Holdsworth et al. .	
4,341,350	7/1982	Wemmer ....	239/312
4,350,293	9/1982	Lestradet ....	239/155
4,358,054	11/1982	Ehrat ....	239/155
4,370,996	2/1983	Williams ....	137/99
4,392,611	7/1983	Bachman et al. ....	239/74
4,399,871	8/1983	Adkins et al. ....	166/325
4,422,562	12/1983	Rawson ....	222/55
4,433,640	2/1984	Beck et al. ....	118/323
4,460,127	7/1984	Hofmann ....	239/126
4,523,280	6/1985	Bachman .	
4,530,463	7/1985	Hiniker et al. ....	239/71
4,588,127	5/1986	Ehrat ....	239/156
4,609,014	9/1986	Jurjevic et al. ....	138/45
4,630,773	12/1986	Ortlip ....	239/1
4,638,924	1/1987	Newson ....	239/127
4,648,043	3/1987	O'Leary ....	364/510
4,659,013	4/1987	Ledebuhr et al. ....	239/8
4,663,725	5/1987	Truckenbrod et al. .	
4,692,103	9/1987	Anderson ....	417/547
4,714,196	12/1987	McEachern et al. ....	239/127
4,725,039	2/1988	Kolchinsky ....	251/129
4,803,626	2/1989	Bachman et al. ....	364/424
4,805,088	2/1989	Cross et al. ....	364/172
4,817,870	4/1989	Dalton ....	239/157
4,823,268	4/1989	Giles et al. ....	364/424
4,844,396	7/1989	Norton ....	248/231
4,854,505	8/1989	La Vine, Jr. ....	239/304
4,908,746	3/1990	Vaughn .	
4,917,304	4/1990	Mazzei et al. ....	239/64
4,924,418	5/1990	Bachman et al. ....	364/550
5,004,007	4/1991	Johnson et al. ....	137/501
5,007,588	4/1991	Chow et al. ....	239/318
5,011,112	4/1991	Glamm ....	251/129
5,027,293	6/1991	Pung et al. .	
5,034,894	7/1991	Abe .	
5,069,392	12/1991	Wise et al. ....	239/675
5,096,125	3/1992	Wise et al. ....	239/675
5,100,059	3/1992	Englhard et al. ....	239/310
5,186,396	2/1993	Wise et al. ....	239/675
5,193,469	3/1993	Tochor ....	111/118
5,220,876	6/1993	Monson et al. ....	111/130
5,222,324	6/1993	O'Neill et al. ....	47/1.7
5,260,875	11/1993	Tofte et al. ....	364/424.07
5,278,423	1/1994	Wangler et al. ....	250/561
5,304,093	4/1994	Sharp et al. ....	454/61
5,355,815	10/1994	Monson ....	111/200
5,453,924	9/1995	Monson et al. ....	364/131
5,453,939	9/1995	Hoffman et al. .	
5,478,013	12/1995	Ballu .	
5,491,631	2/1996	Shirana et al. .	
5,520,333	5/1996	Tofte ....	239/155
5,521,842	5/1996	Yamada .	
5,634,039	5/1997	Simon et al. .	
5,704,546	1/1998	Henderson et al. ....	239/1

## FOREIGN PATENT DOCUMENTS

0635960A1	1/1995	European Pat. Off. .
2503417	10/1982	France .
2 571 209	11/1986	France .
2 633 156	12/1989	France .
3309920	9/1984	Germany .
3537 082 A1	10/1985	Germany .
193431	4/1984	Hungary .
02265662	10/1990	Japan .
8505948	5/1984	Sweden .
669885 A5	4/1989	Switzerland .
400807	2/1974	U.S.S.R. .
935048	6/1982	U.S.S.R. .
1507457	9/1989	U.S.S.R. .
2 030474	4/1980	United Kingdom .
2 277 891	11/1994	United Kingdom .
WO 96/31118	10/1996	WIPO .

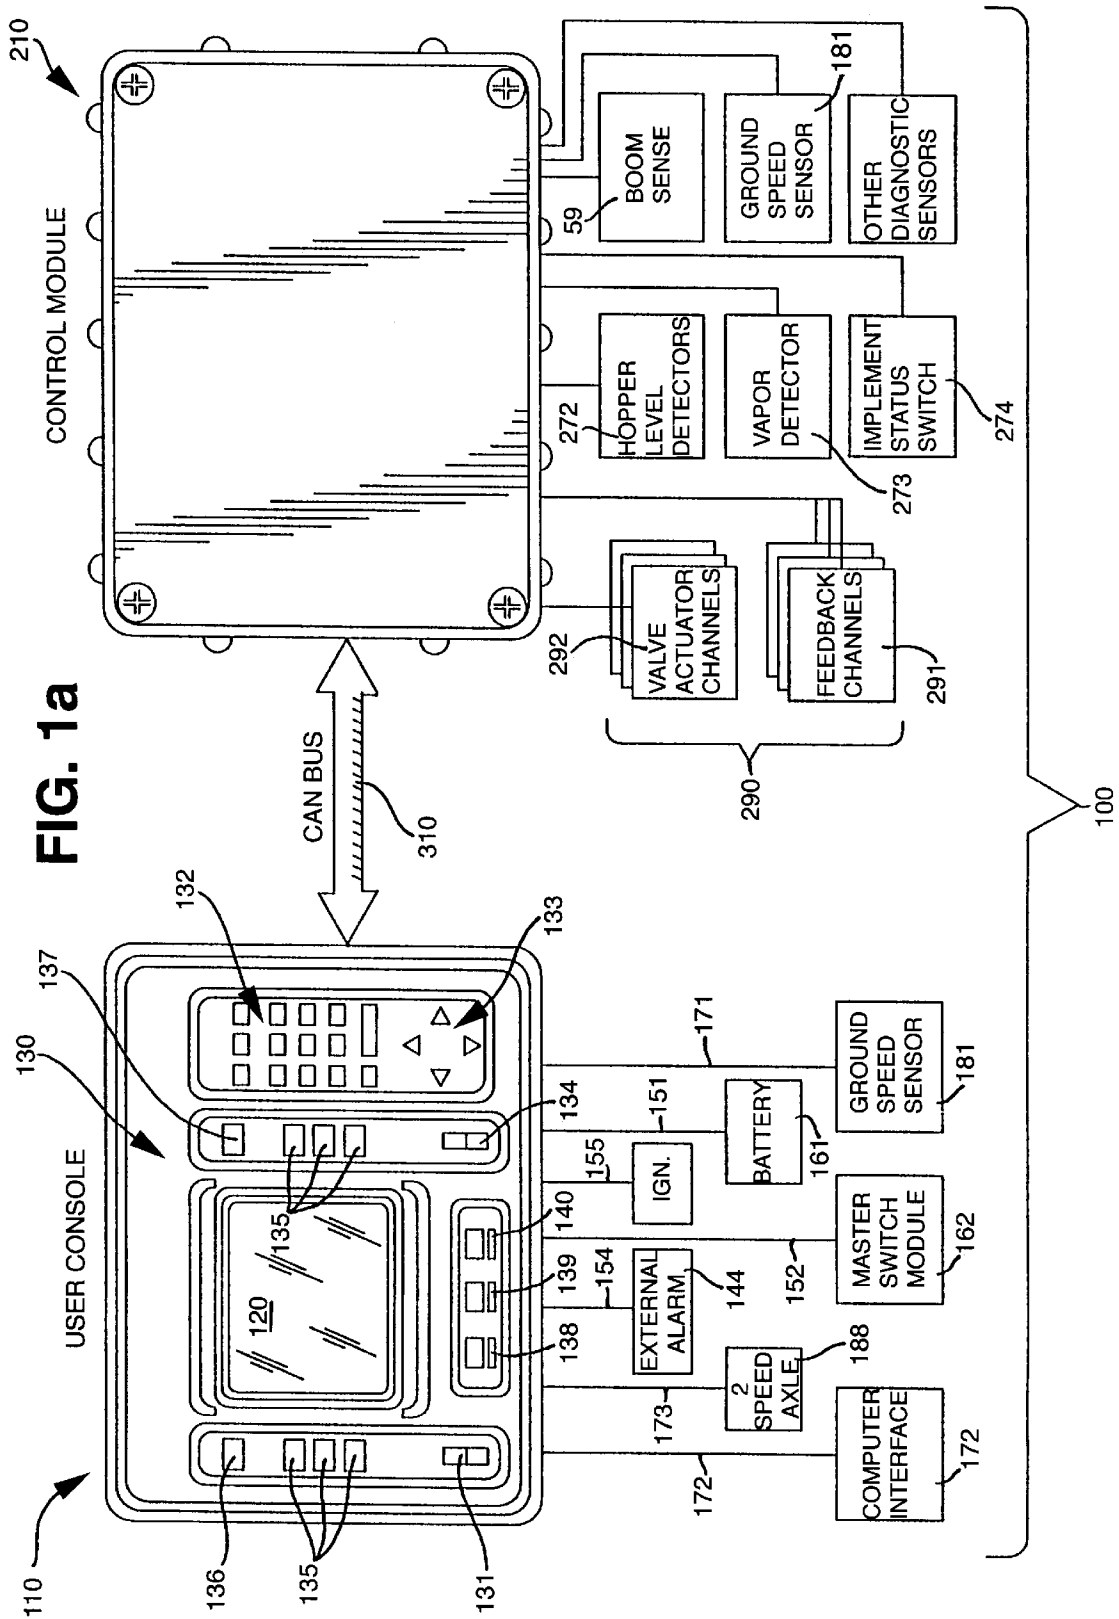

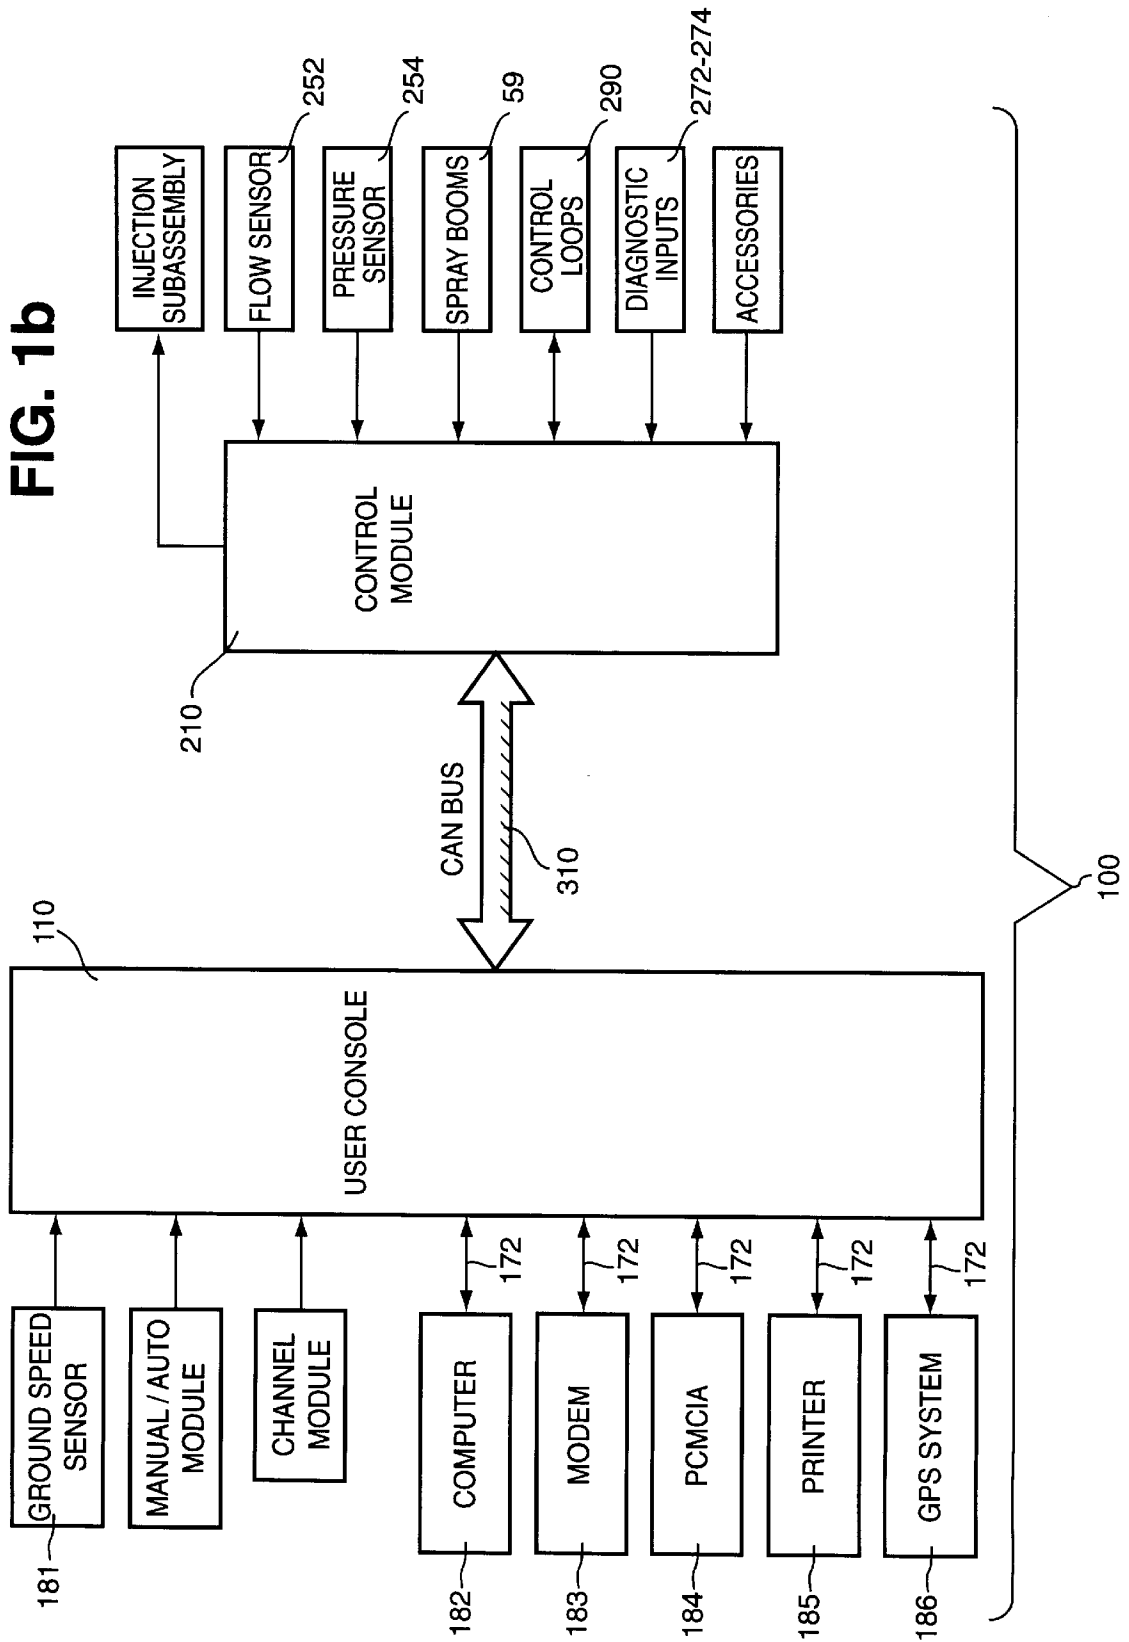

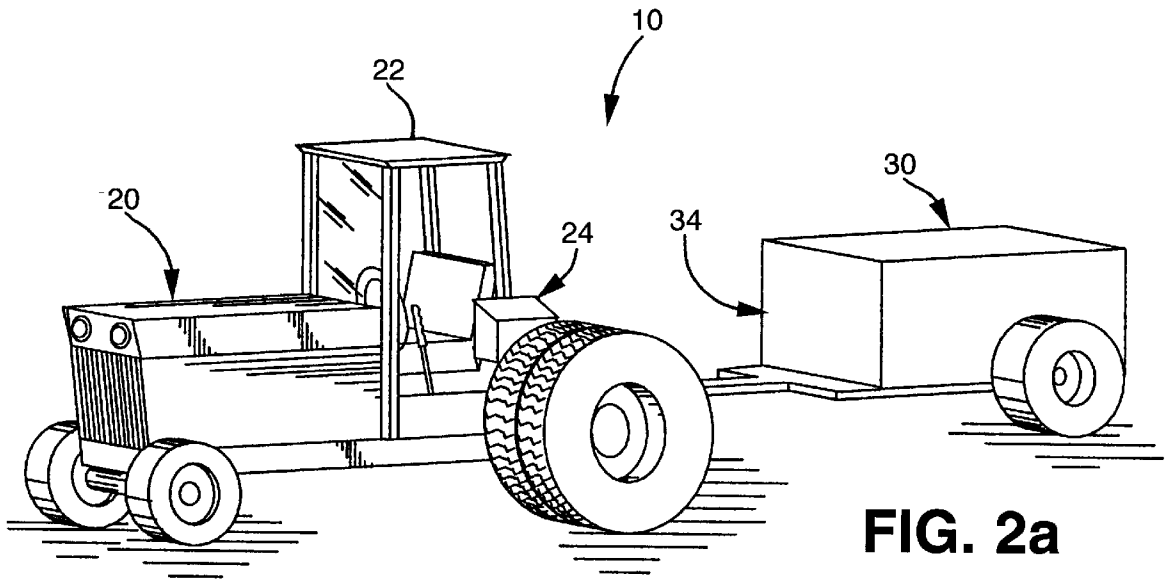
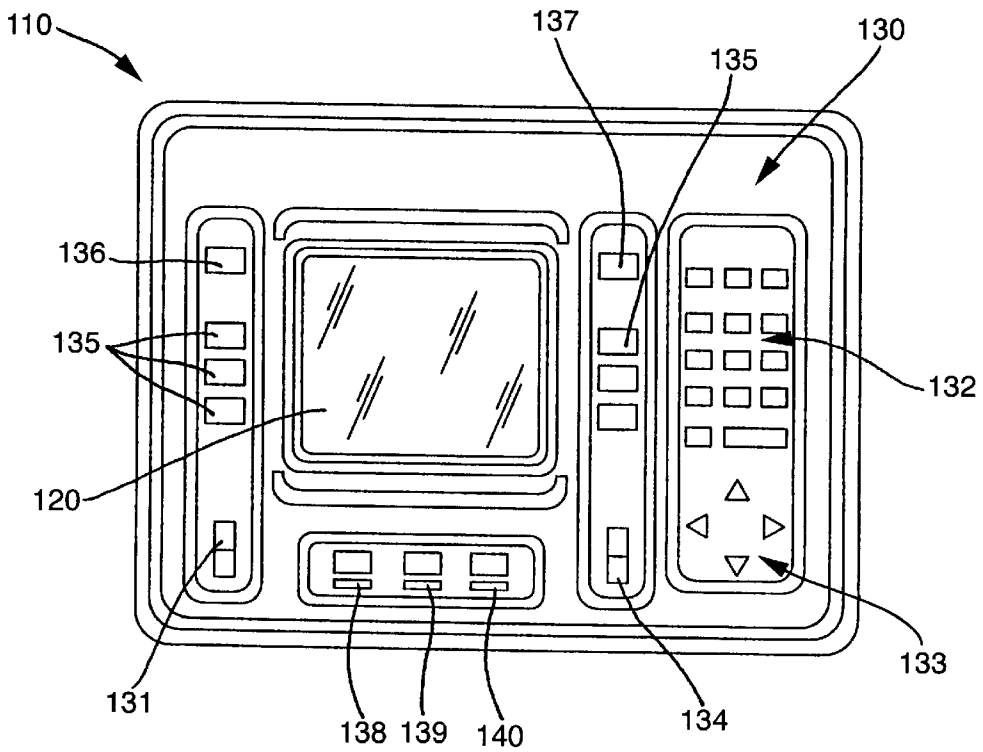


FIG. 3



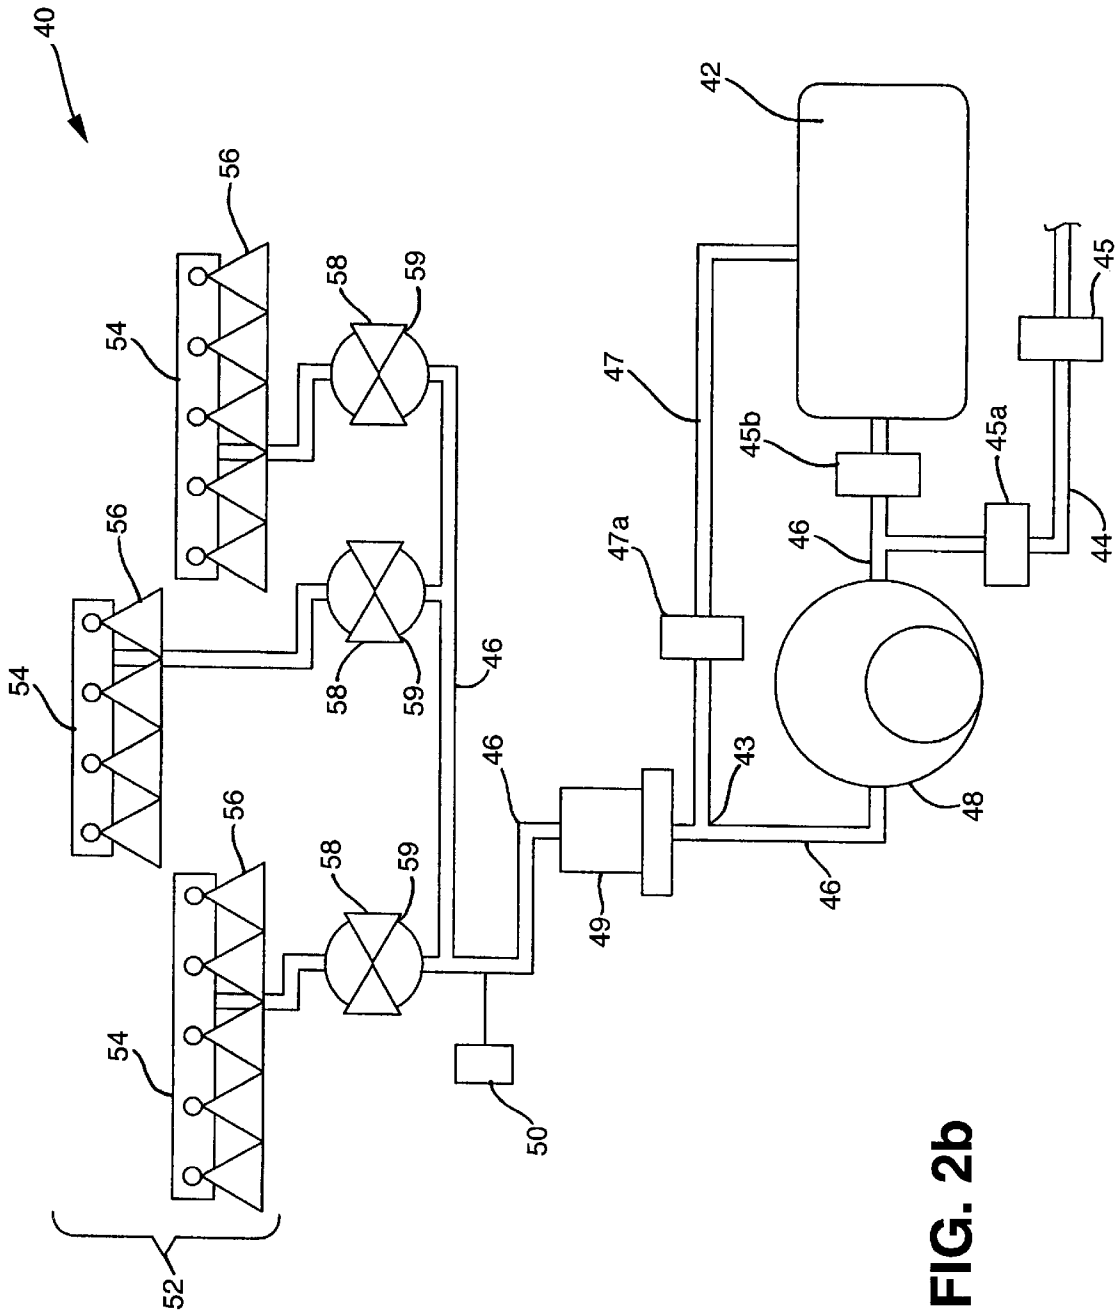


FIG. 2b

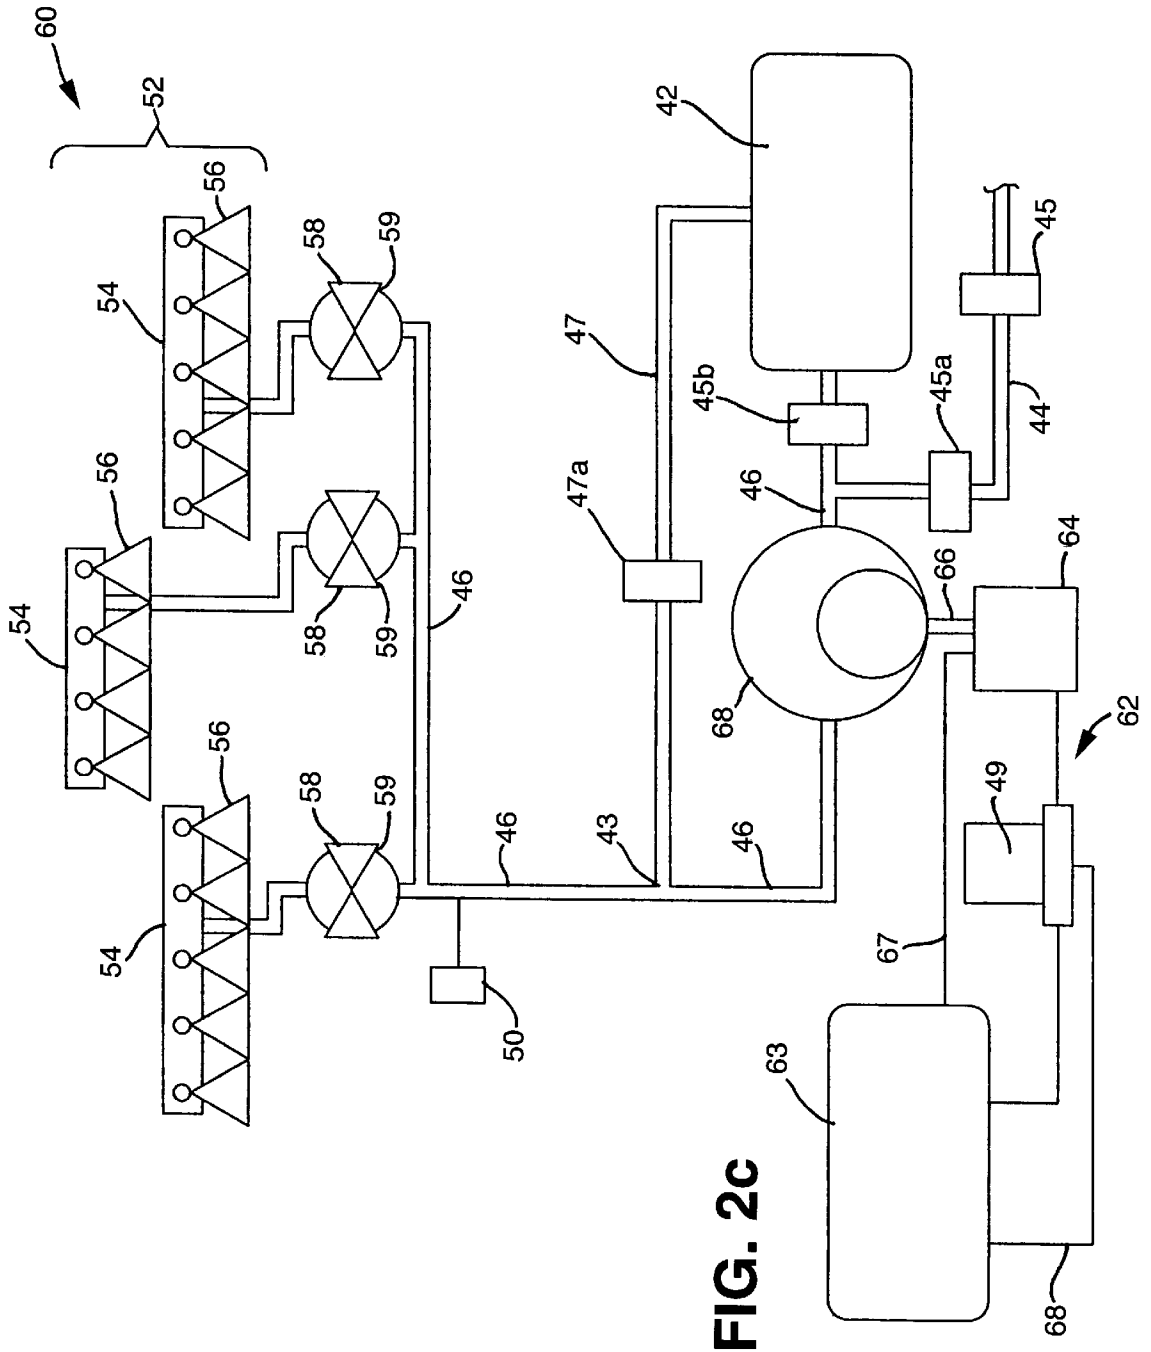


FIG. 2C

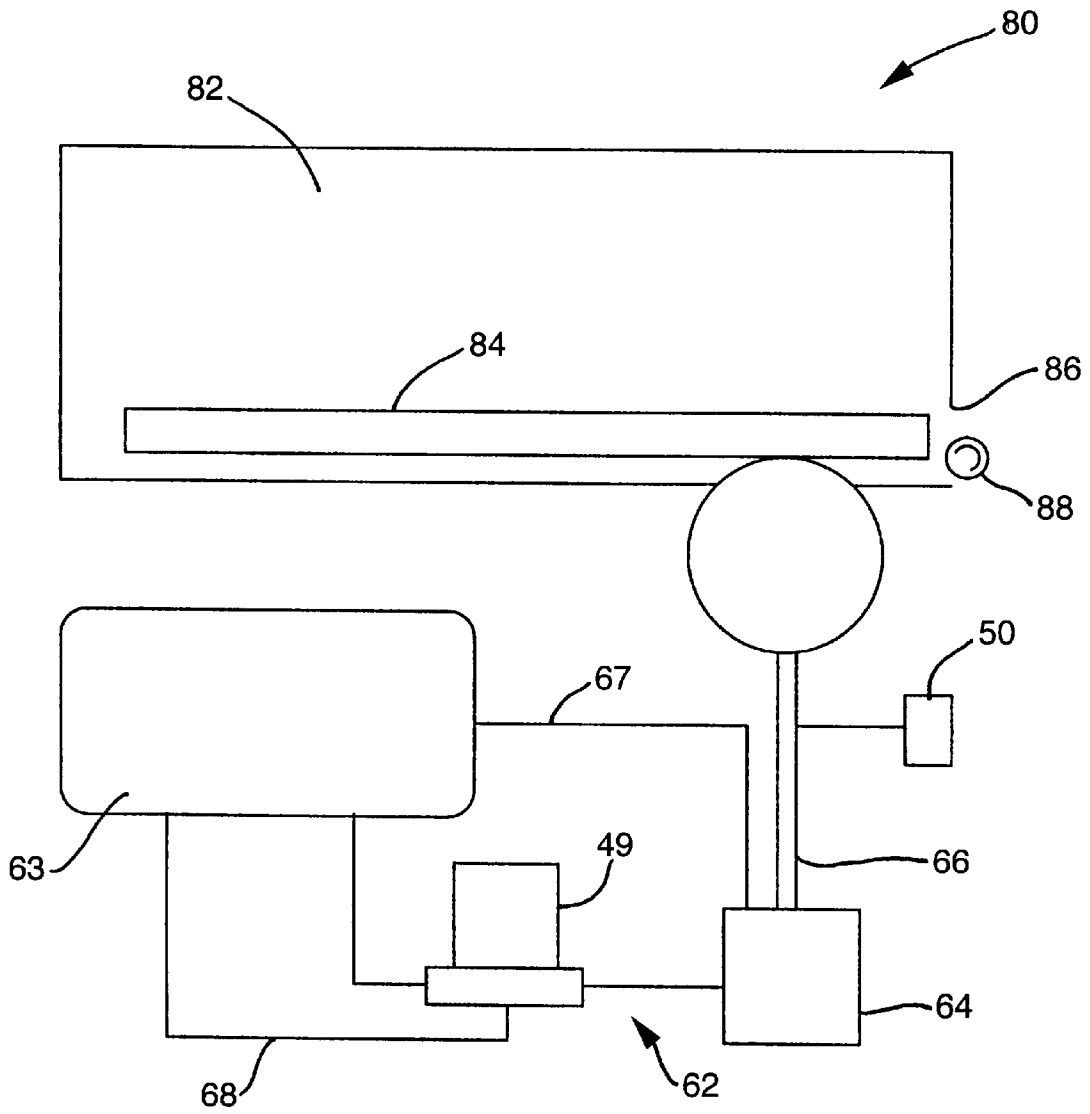
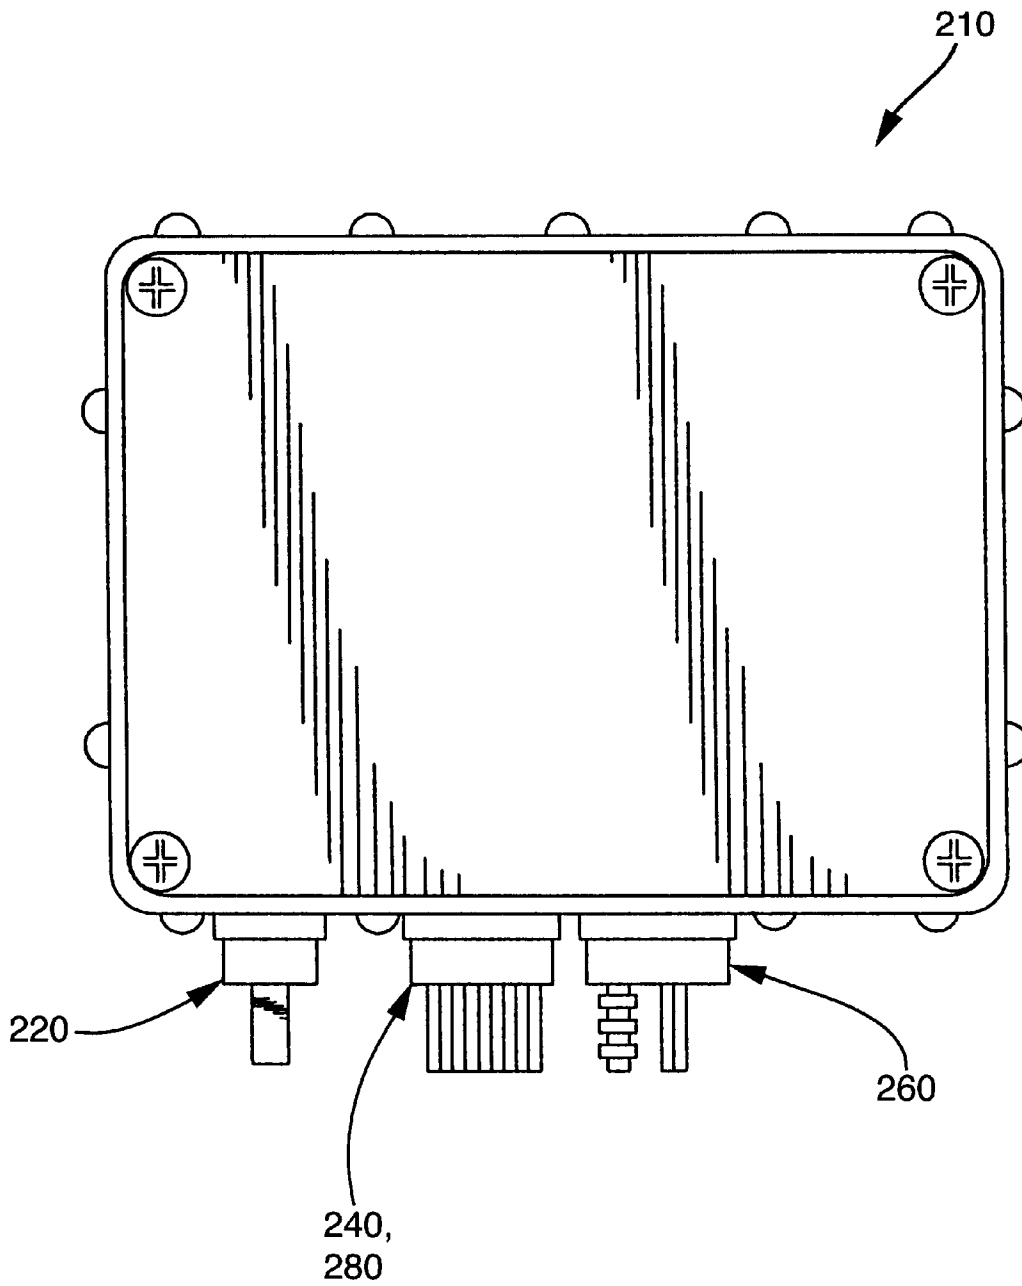


FIG. 2d





**FIG. 4**

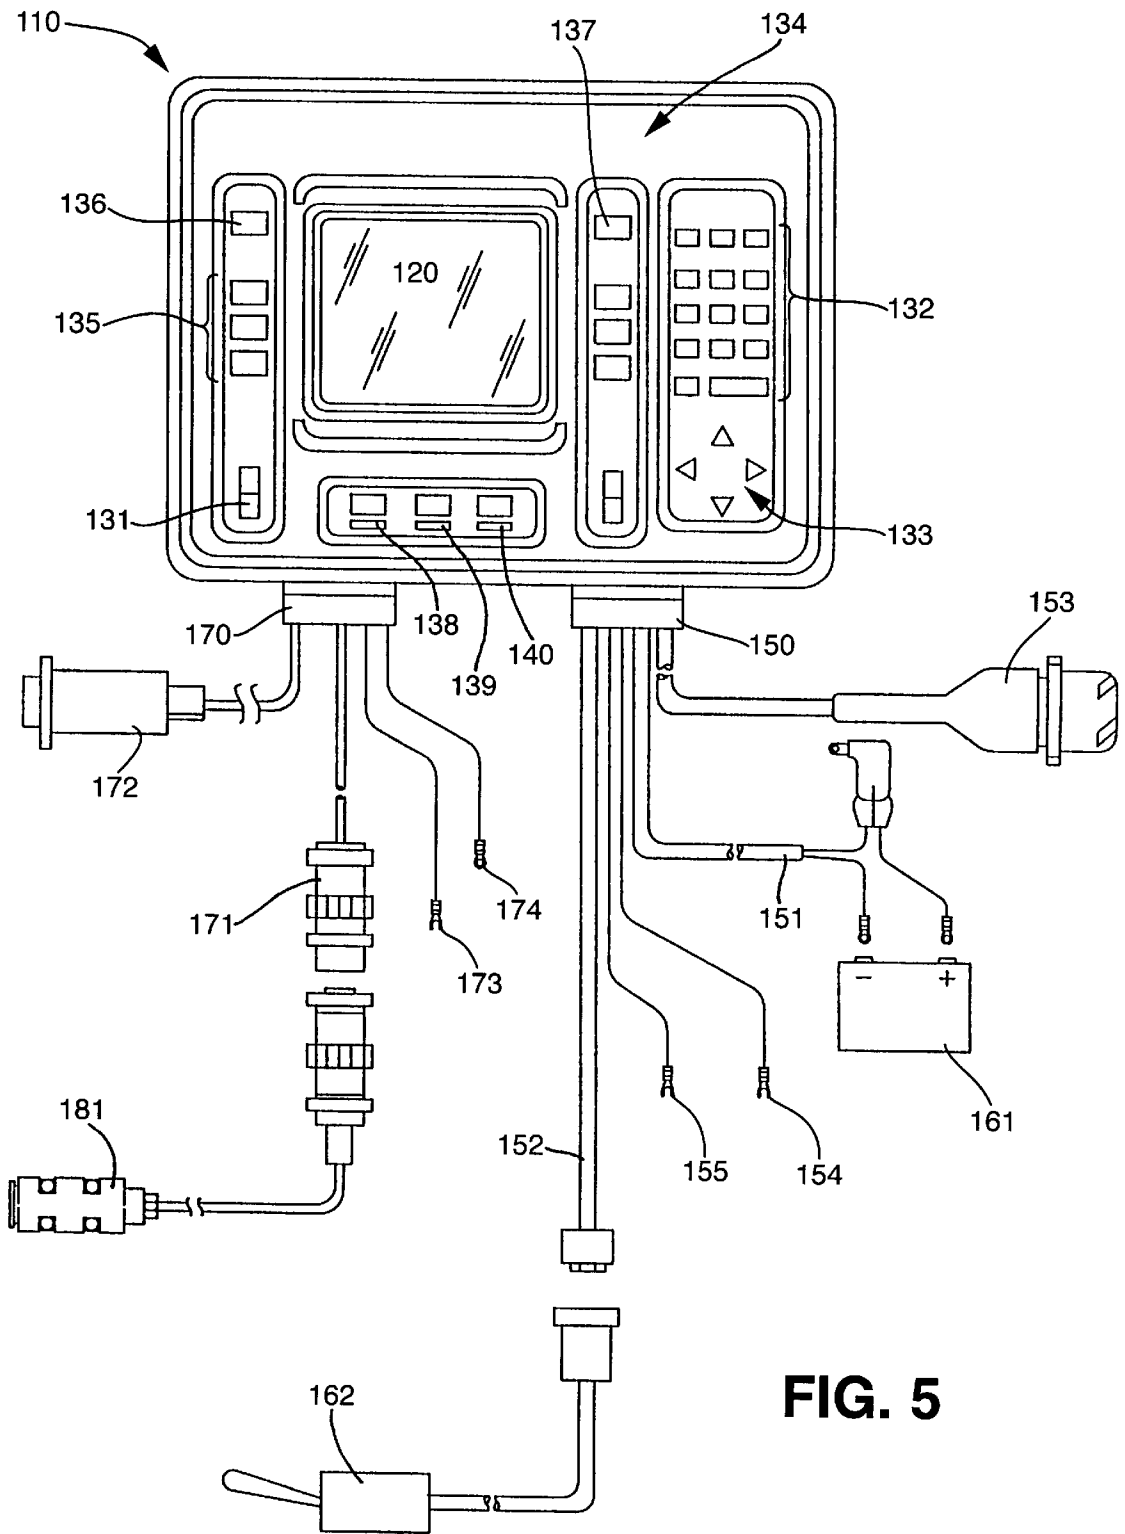


FIG. 5

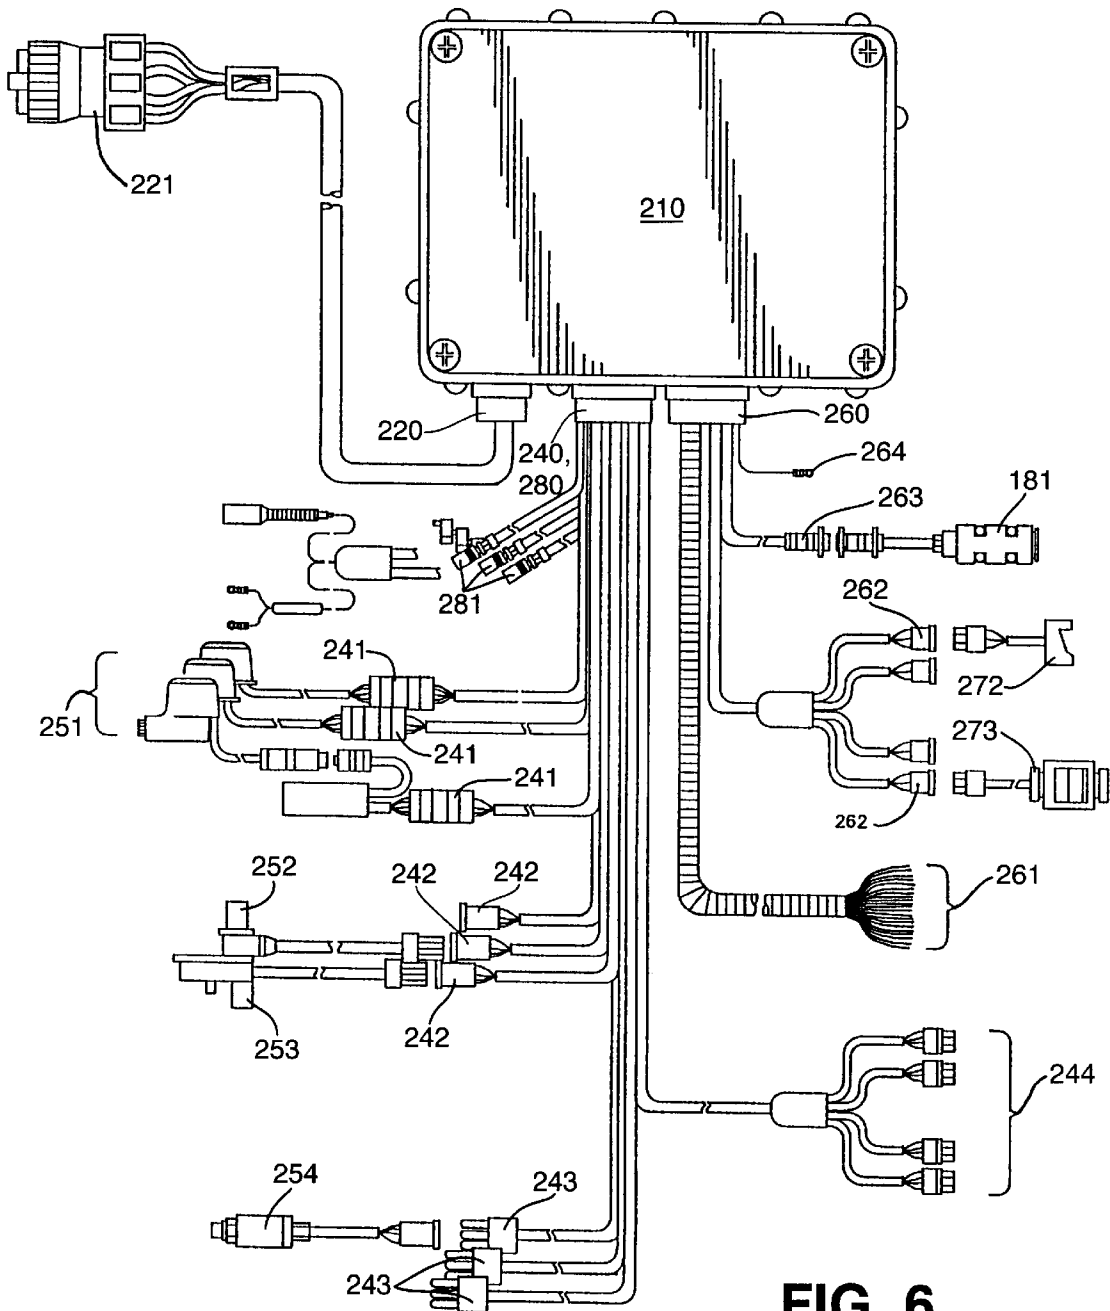
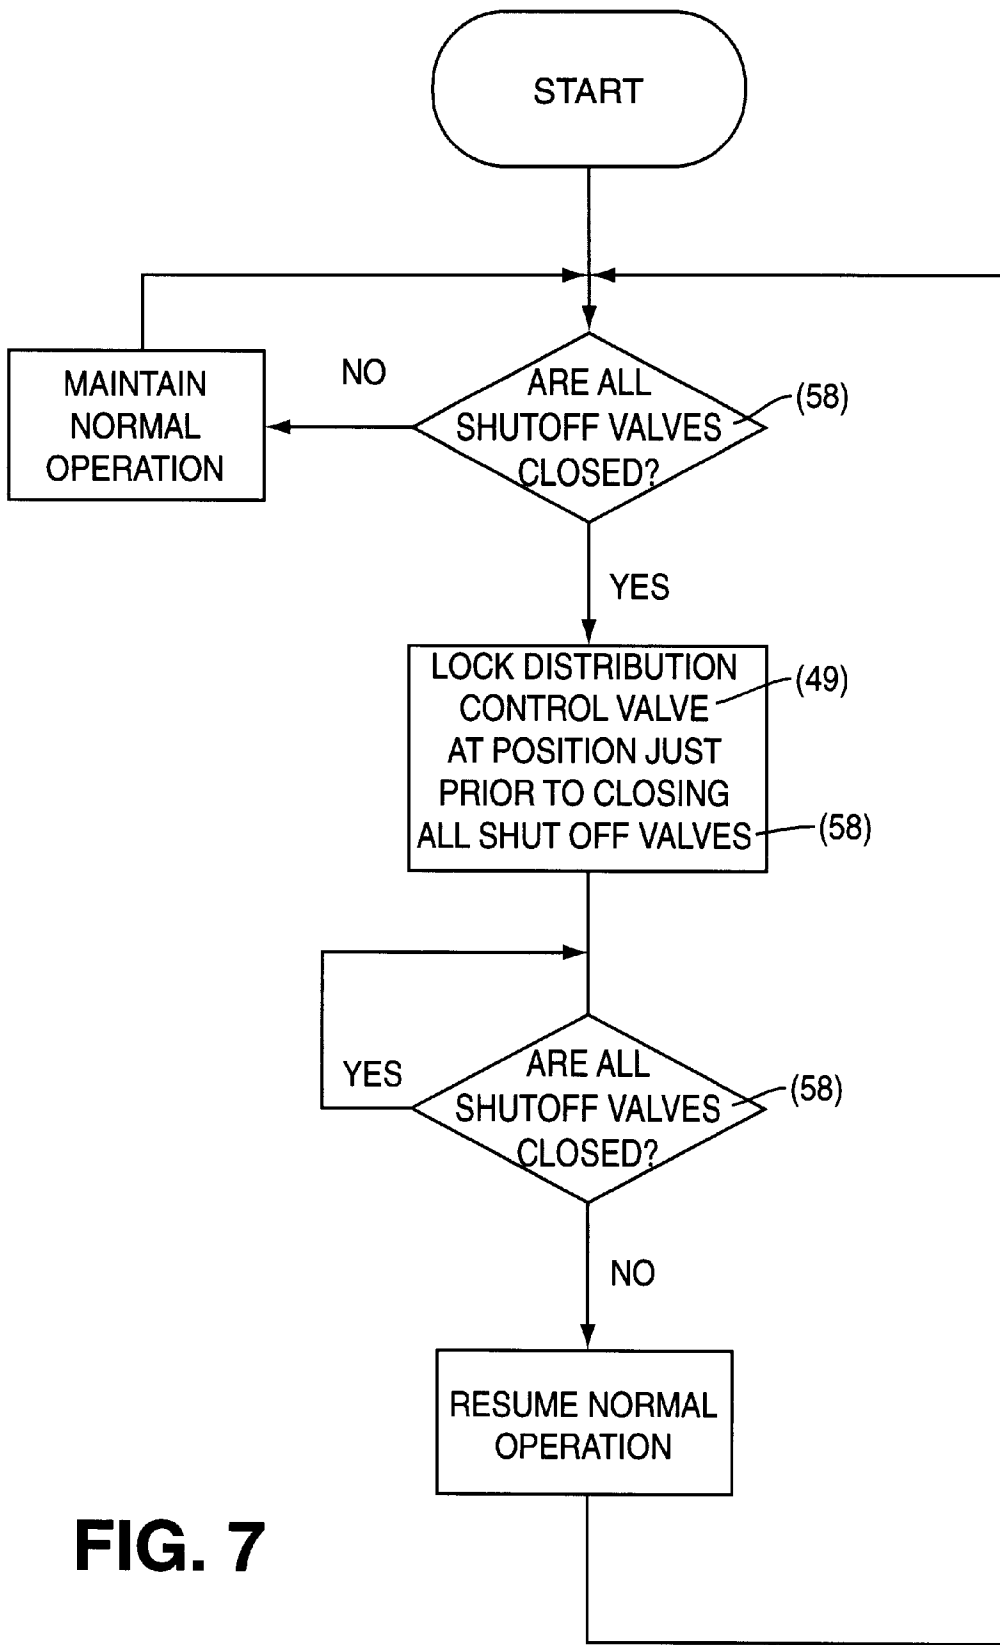


FIG. 6



**FIG. 7**

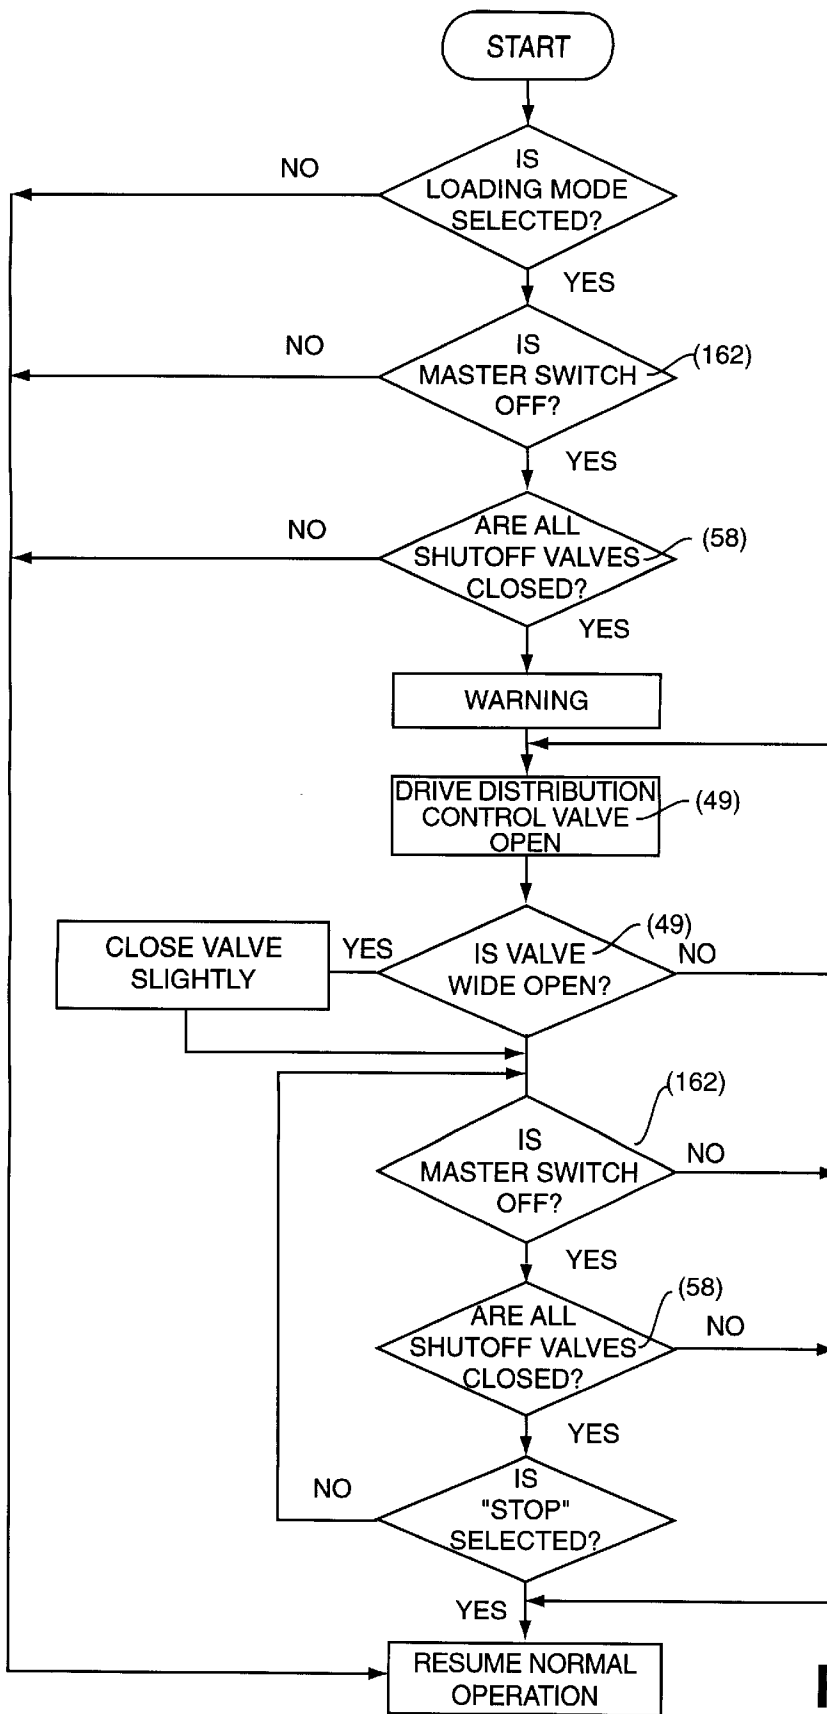


FIG. 8

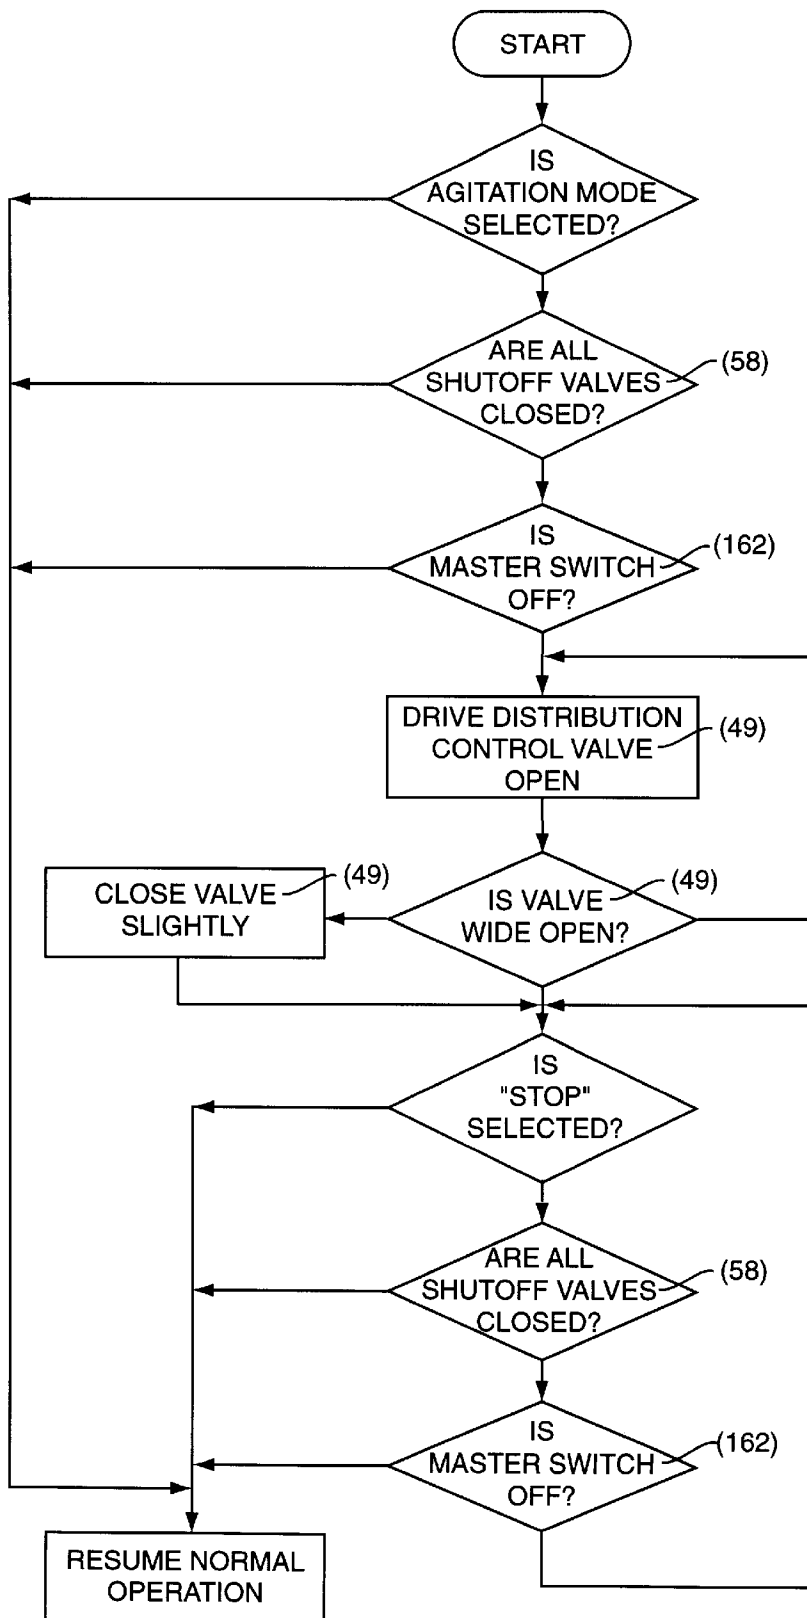


FIG. 9

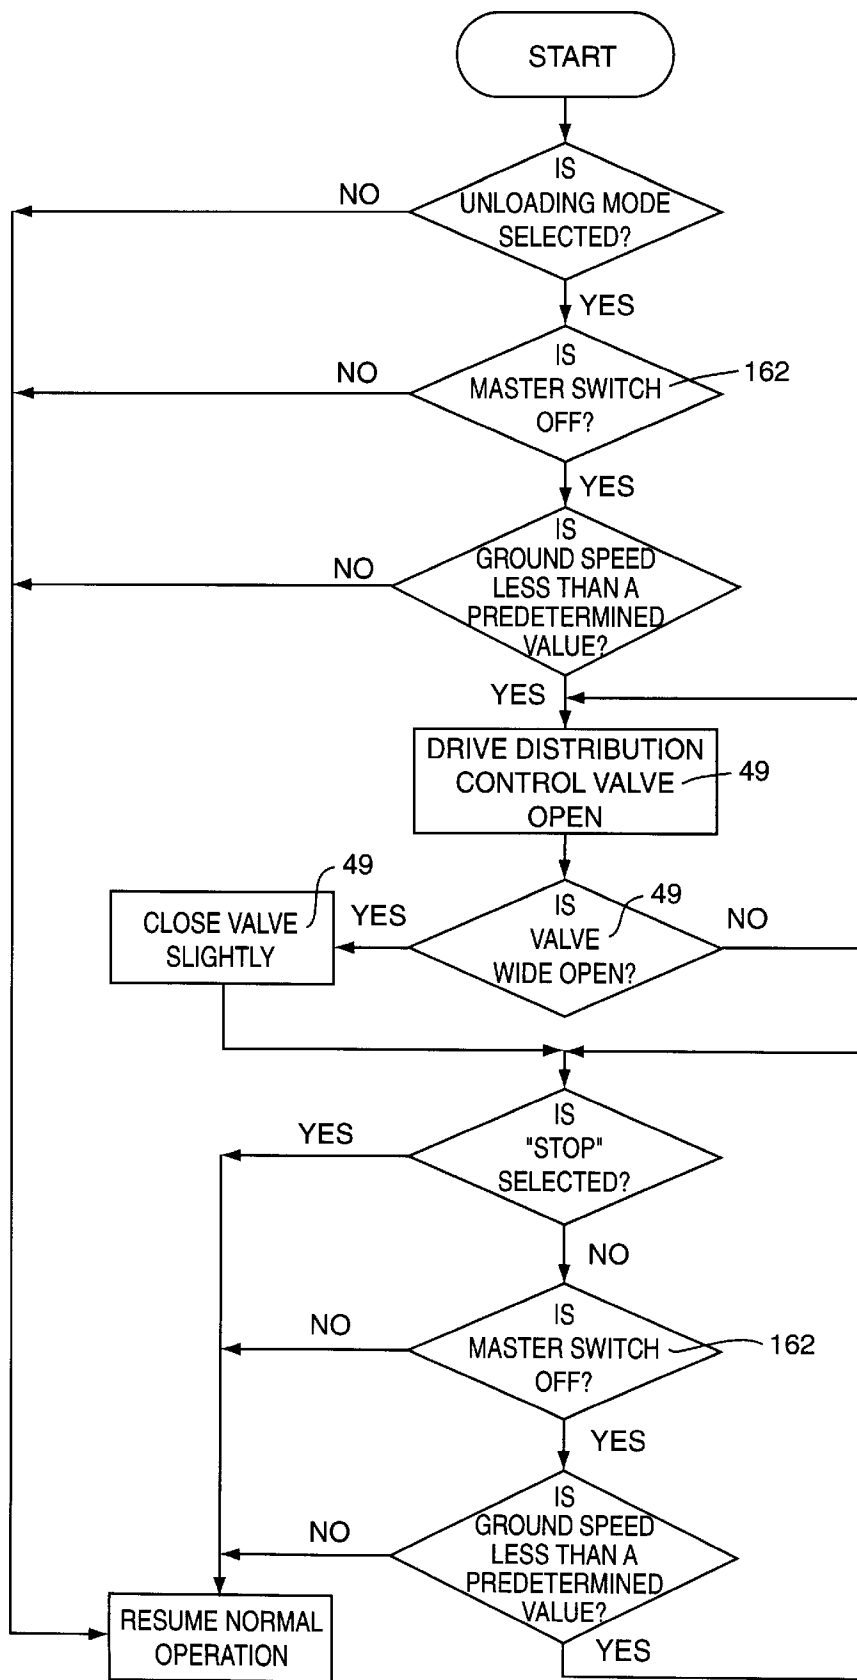


FIG. 10

## CONTROL SYSTEM FOR A MOBILE MATERIAL DISTRIBUTION DEVICE

### FIELD OF THE INVENTION

The present invention relates generally to control systems and, more particularly, to a control system for precisely regulating the discharge of liquid, granular, and/or anhydrous material from a mobile material distribution device such as a farm implement, a public works vehicle, or the like.

### BACKGROUND OF THE INVENTION

Control systems for regulating the operation of mobile material distribution devices—including, for example, farm implements such as sprayers and planters, and public works vehicles such as salt spreaders—have been known in the art for some time. Such prior art control systems are usually used to control the rate at which material is dispersed or distributed from the material distribution device. Some such systems, for example, include microprocessor based control systems wherein the ground speed and field position of the material distribution device, as well as the type of soil and other factors, are continually monitored in order to distribute a controlled amount of material throughout the field.

Such prior art control systems, however, suffer from certain drawbacks. For example, prior art control systems frequently cause an inefficient loading and/or unloading of material from the material distribution device.

In particular, prior art control systems generally cause a misapplication of material when the outlet ducts or nozzles of the material distribution device are momentarily closed by the operator. For instance, when the material distribution device is turning around at the end of a field or is traveling across a section of field which should not be treated, the outlet ducts or nozzles of the material distribution device are momentarily closed by the operator in order to prevent the dispersal of material therefrom. This, in turn, causes some prior art control systems to fully open a product flow control valve which results in an over-pressurization of the product distribution line leading to the outlet ducts or nozzles, and also causes an over-application of material when the outlet ducts or nozzles are subsequently reopened by the operator. In other prior art control systems, an automatic override causes the product flow control valve to completely close which results in an under-pressurization of the product distribution line leading to the outlet ducts or nozzles. This under-pressurization, in turn, results in the loss of pressure and the development of air pockets in the product distribution line, and also causes an under-application of material when the outlet ducts or nozzles are subsequently re-opened by the operator.

Another problem associated with prior art control systems is that when the material distribution device is receiving a supply of material from an external supply source such as a nurse truck, an additional pump may be required for loading material into the product tank of the material distribution device. Such a set-up requires numerous plumbing connections which significantly increases the likelihood of material spillage and other accidents.

### OBJECTS OF THE INVENTION

Accordingly, a general object of the present invention is to provide a control system for a mobile material distribution device which allows material to be delivered to and discharged from the material distribution device in an efficient and expedient manner.

A related object of the present invention is to provide a control system which regulates the dispersal of liquid, granular, and anhydrous materials based upon the ground speed of the material distribution device and the desired width of material application.

A further related object of the present invention is to provide a control system which maintains a substantially uniform material dispersal rate through open outlet ducts as the material distribution device traverses a field.

Another general object of the present invention is to provide a control system for a mobile material distribution device with a control valve locking feature which prevents the over-pressurization or under-pressurization of the product distribution lines when the outlet ducts or nozzles of the material distribution device are momentarily closed.

A related object of the present invention is to provide a control system which prevents extreme pressure loss and the development of air pockets in the product distribution lines when the outlet ducts or nozzles of the material distribution device are momentarily closed.

A further related object of the present invention is to provide a control system which prevents the misapplication of material when the outlet ducts or nozzles of the material distribution device are momentarily closed and then subsequently re-opened.

An additional object of the present invention is to provide a control system with a loading feature which enables liquid material to be safely and reliably delivered to the material distribution device from an external supply vehicle.

A further object of the present invention is to provide a control system with an unloading feature which provides for the automatic discharge of excess granular material from the material distribution device in a safe and reliable manner.

An additional object of the present invention is to provide a control system with an agitation feature which allows liquid material to be selectively agitated while en route to an application site or while the material distribution device is traversing a field.

Still another object of the present invention is to provide a control system having the foregoing features and characteristics which is reliable, durable, and convenient to use.

These and other objects, features, and advantages of the present invention will become apparent upon reading the following detailed description of a preferred exemplified embodiment and upon reference to the accompanying drawings.

### SUMMARY OF THE INVENTION

The present invention accomplishes these objects and overcomes the drawbacks of the prior art by providing a control system for a mobile material distribution device which efficiently, expediently, and reliably regulates the discharge of material therefrom. In particular, the control system may be used with a material distribution device having a supply of material contained within a product tank or bin, a boom with at least one boom section, a plurality of outlet ducts (e.g., nozzles and/or distribution ports) associated with each boom section, shut-off valves for selectively enabling each boom section, and a selectively-movable control valve for regulating the flow of material to the boom sections. The control system of the present invention, in turn, includes a boom sensing input comprised of sensors, lines, or the like for monitoring the operational status of each boom section (i.e., whether the shut-off valves are open or closed and the associated boom sections are enabled or



disabled), and a processing system for maintaining a substantially stable pressure level between the control valve and each shut-off valve by positionally locking the control valve at its last controlled position upon receiving a signal from the boom sensing input indicating the shut-off valve associated with each boom section is closed.

In its presently preferred form, the processing system includes a user console, a control module, and a communication link which connects the user console and the control module. More specifically, the user console displays information regarding the control system and the material distribution device and provides a means for entering data into the control system, while the control module receives input signals from the boom sensing input and other feedback sensors associated with the material distribution device and generates output signals which precisely regulate the control valve. A feedback sensor, connected to the control module and disposed along an outlet line leading to the boom in either a downstream or upstream relationship with respect to the control valve, monitors a parameter indicative of material dispersal rate (e.g., pressure and/or flow), while a speed sensor, connected to either the control module or the user console, monitors the ground speed of the material distribution device. Based upon information received from the boom sensing input, the feedback sensor, the ground speed sensor, and/or manually entered by the user, the control system selectively regulates the control valve of the material distribution device so as to precisely control the material dispersal rate through the enabled boom sections and to provide the material distribution device with certain useful functions including loading, unloading, and agitation features.

#### BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, wherein similar reference numerals denote similar elements throughout the several views:

FIG. 1A is a schematic diagram of one embodiment of a control system according to the present invention;

FIG. 1B is a block diagram of the control system depicted in FIG. 1A;

FIG. 2A is a perspective environmental view of a representative mobile material distribution device having an attached product distribution implement and utilizing the control system shown in FIGS. 1A and 1B;

FIG. 2B is a schematic diagram of a first product distribution implement for dispensing liquid material;

FIG. 2C is a schematic diagram of a second product distribution implement for dispensing liquid material;

FIG. 2D is a schematic diagram of a third product distribution implement for dispensing granular material;

FIG. 3 is a face plan view of the user console of the control system depicted in FIG. 1A;

FIG. 4 is a top plan view of the control module of the control system depicted in FIG. 1A;

FIG. 5 is a representative schematic wiring diagram for the user console depicted in FIGS. 1A and 3;

FIG. 6 is a representative schematic wiring diagram for the control module depicted in FIGS. 1A and 4.

FIG. 7 is a flow chart illustrating a control valve locking feature of the present invention;

FIG. 8 is a flow chart illustrating a loading feature of the present invention;

FIG. 9 is a flow chart illustrating an agitation feature of the present invention;

FIG. 10 is a flow chart illustrating an unloading feature of the present invention.

While the present invention will be described and disclosed in connection with certain preferred embodiments and procedures, the intent is not to limit the present invention to these specific embodiments. On the contrary, the intent is to cover all such alternatives, modifications, and equivalents that fall within the spirit and scope of the present invention as defined by the appended claims.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Turning now to the drawings, a control system constructed in accordance with the present invention is generally designated by reference numeral **100**. By connecting certain feedback sensors and actuators associated with a material distribution device **10**—such as that depicted in FIG. 2A—to the control system **100** depicted in FIGS. 1A and 1B, and by inputting certain characteristics concerning the properties and operating characteristics of the material distribution device **10**, the control system **100** of the present invention may be used to monitor and control the operation of virtually any material distribution device **10** having substantially any application.

For example, when properly configured, the control system **100** of the present invention may be used to monitor and control the operation of various material distribution devices **10** including farm implements such as liquid sprayers, granular distributors, anhydrous ammonia applicators, planters, and the like, and public works vehicles such as salt spreaders. Indeed, the control system **100** may be used to monitor and control the application of a wide variety of materials including, for example, liquid and granular fertilizers, pesticides, herbicides, fungicides, chemicals, anhydrous ammonia, sand, salt, cinders, seeds, and the like. In fact, the inventive control system **100** may be used to monitor and control multiple material distribution devices **10** at different times simply by substituting certain component parts and/or by changing certain feedback connections. In the embodiments disclosed herein, the control system **100** is referred to in the context of distribution devices **10** distributing material over a “field.” The term “field” herein means not only a farm field, but also any area of ground over which the distribution device **10** may traverse in distribution material including, for example, roadways.

In view of this flexibility, the control system **100** of the present invention is provided with two primary components, namely, a user console **110** and a control module **210**. As discussed in greater detail below, the user console **110** is primarily an input/output device which not only provides visual information concerning the performance and operation of the control system **100** and the attached material distribution device **10**, but also provides a user-friendly means for inputting information into the control system **100**. The control module **210**, in contrast, is the processing or command center for the control system **100**. In operation, the control module **210** receives information from various feedback sensors (e.g., pressure transducers, flowmeters, application rate sensors, ground speed sensors, product level sensors, and the like) regarding the operation of the material distribution implements **30**, transmits performance information concerning both the control system **100** and the material distribution implement **30** to the user console **110** for display, and generates output signals which precisely regulate one or more product flow distribution control valves of the material distribution device **10**. Together, the user con-

sole **110** and the control module **210** provide a universal modular control system **100** which is capable of controlling a wide variety of machinery.

Although the inventive control system **100** is shown and described herein as a multi-component system comprised the user console **110** and the control module **210**, it will be readily appreciated by those skilled in the art that these two components may alternatively be assimilated into a single housing or unit without departing from the scope or spirit of the present invention.

As shown in FIG. 2A, the material distribution device **10** may comprise a tractor or prime mover **20**, which may have a cab **22**, and one or more attached product distribution implements **30**. Alternatively, the material distribution device **10** may be constructed as a single structure (not shown). In the former case, the control module **210** may either be disposed on the prime mover **20** (e.g., at position **24**) or on the distribution implement **30** (e.g., at position **34**). The product distribution implement **30** has been shown as a non-descript block in FIG. 2A so to emphasize the universality of the inventive control system **100**. Those skilled in the art, however, will understand that the non-descript block of FIG. 2A may represent any material distribution implement **30** that a user wishes to monitor and control.

For example, the product distribution implement **30** shown in FIG. 2A may comprise any or all of the material distribution systems **40**, **60**, and **80** shown in FIGS. 2B, 2C, and 2D, respectively. As will be discussed in greater detail below, the first and second material distribution systems **40** and **60** are specifically adapted to distribute liquid material (e.g., liquid fertilizers, pesticides, herbicides, fungicides, chemicals, and the like), while the third material distribution system **80** is specifically adapted to distribute granular material (e.g., sand, salt, cinders, seeds, granular fertilizers, and the like).

As shown in FIG. 2B, the first exemplary material distribution system **40** has a product supply path which includes a storage tank **42** for containing a supply of liquid material, an outlet or product distribution line **46** for supplying liquid material to one or more downstream booms **52**, a pump **48** for pressurizing liquid material in the product distribution line **46**, an inlet line **44** for supplying liquid material to the product supply path, and a return line **47** for connecting the outlet line **46** and the storage tank **42**. A plurality of valves **45**, **45a**, and **45b** also provided for selectively opening and closing the inlet and outlet lines **44** and **46**, depending on the desired operation. In particular, a manual supply valve **45** is disposed along the inlet line **44**, a second valve **45a** is also disposed along the inlet line, and a third valve **45b** is disposed along the outlet line **46** between the product tank **42** and the pump **48**. Of course, with such a set-up, manual valve **45** would be redundant. In addition, although a pair of valves **45a** and **45b** are shown along inlet line **44**, it will be appreciated by those skilled in the art that a single two-way valve (not shown), disposed at the junction of the inlet and outlet lines **44** and **46**, may alternatively be used for selectively opening either the inlet line **44** or the outlet line **46**. A sparge valve **47a** is also provided along the return line **47** for regulating the flow of material therethrough.

As is customary in the art, the booms **52** include a plurality of outlet ducts disposed along their length for distributing material therefrom. Those skilled in the art will appreciate that booms **52** equipped with nozzles **56** (FIGS. 2B and 2C) are designed to dispense liquid material, while booms **52** equipped with distribution ports **86** (FIG. 2D) are designed to dispense granular material. In any event, for the

purpose of this application, the term "outlet ducts" shall include nozzles **56** for dispensing liquid material, distribution ports **86** for dispensing granular material, and/or any other ducts through which liquid, granular, and/or anhydrous material may be distributed.

Since booms **52** may be very long, sometimes as long as one-hundred feet, they generally include numerous outlet ducts. Typically, these outlet ducts are arranged in groups, as boom sections **54**, so that each boom section **54** may be turned on and off individually. As schematically illustrated in FIG. 2B, for example, each boom section **54** includes an associated shut-off valve **58**, such as a solenoid valve, for selectively activating and deactivating individual boom sections **54**. Although the booms **52** disclosed herein dispenses one type of material, it will be appreciated by those skilled in the art that different booms **52** may be provided to dispense dissimilar materials (e.g., one boom **52** may distribute fertilizer, while another boom **52** may distribute a pesticide). of course, with each additional material, another supply path will also be required.

In order to supply liquid material to the product tank **42** on an as-needed basis, the inlet line **44** of the first distribution system **40** may be attached to an external supply source such as a supply truck (not shown). Alternatively, a hose (not shown) may be provided for linking the external supply source to an opening (not shown) located at or near the top of the product tank **42**. In prior art systems, a supplementary pump (not shown) is commonly used to pump liquid material from the external supply source, through the inlet line **44**, and into the supply tank **42**. In the first material distribution system **40**, however, pump **48** may be advantageously used to pump liquid material from the external supply source, through the inlet line **44**, through the outlet line **46**, through the return line **47**, and into the supply tank **42** without the use of a supplementary pump. As will be described more fully below, this loading operation is accomplished simply by closing shut-off valves **58**, opening valves **45** and/or **45a**, closing valve **45b**, opening valve **47a**, and energizing pump **48**. In such use, pump **48** may either be driven by an independently-operated motor (not shown), or by a power take-off shaft (not shown) from the prime mover **20**. In addition, the pump **48** may either be constant-speed pump or a variable-speed pump and may take almost any form including, for example, a centrifugal pump, a positive displacement pump, an electric pump, a hydraulic pump, a reciprocating pump, a rotary pump, or the like.

In keeping with an important aspect of the present invention, the first material distribution system **40** further includes an actuator valve or product distribution control valve **49** which regulates the material dispersal rate through the outlet ducts or nozzles **56** of the activated boom sections **54** by selectively opening and closing product distribution line **46**. In practicing the invention, the control valve **49** may either be disposed in the outlet line **46**, as shown in FIG. 2B, or be disposed in the return line **47** (not shown) in place of the sparge valve **47a**. In either event, the material dispersal rate through the outlet ducts or nozzles **56** is regulated by selectively opening or closing the control valve **49** a desired amount so as to divert the appropriate flow of material to the activated boom sections **54**. In fact, the material dispersal rate of all three of the material distribution systems **40**, **60**, and **80** are regulated by a similar control valve **49**. Indeed, by controlling this valve **49**, the control system **100** of the present invention may be used to selectively regulate the material dispersal rate of all three material distribution systems **40**, **60**, and **80**. In addition, although the control valves **49** described herein are characterized as servo-based

hydraulic-type valves, it will be readily appreciated by those skilled in the art that other valve-types may alternatively be used—including, for example, pulse-width modulated (“PMW”) valves—without departing from the scope or spirit of the present invention.

As shown in FIG. 2B, the first material distribution system 40 also includes one or more feedback sensors 50 (e.g., pressure transducers, flowmeters, and/or application rate sensors) for monitoring a parameter indicative of material dispersal rate. These feedback sensors 50 are preferably disposed along the product distribution line 46 in either a downstream or upstream relationship with respect to the actuator valve 49. For example, if the feedback sensor 50 comprises a pressure transducer 254, it is preferably located downstream of the actuator valve 49 and upstream of the shut-off valves 58, as shown in FIGS. 2B and 2C. If, however, the feedback sensor 50 comprises a flowmeter 252, it is preferably located upstream of the actuator valve 49 (e.g., between the pump 48 and the actuator valve 49). A series of boom sensors or lines 59 are also provided for monitoring the status of each shut-off valve 58 (i.e., whether these valves 58 are open or closed) and the associated boom sections 54 (i.e., whether these boom sections 54 are enabled or disabled). In use, these boom sensors or lines 59 may either directly sense the status of the valves 58, such as by measuring the position of an operable component of the valve 58 itself, or indirectly sense the status of the valves 58, such as by monitoring the position of the switches which control the valves 58 or by measuring the voltage of an electrical line driving the valve 58.

In operation, the control system 100 of the present invention continuously receives status information from the feedback sensors 50, the boom sensors 59, and other sensors (e.g., ground speed sensors). As will be discussed in greater detail below, the control system 100 utilizes this status information to automatically adjust the actuator valve 49 so as to precisely regulate the material dispersal rate through the outlet ducts or nozzles 56. Indeed, with all three of the material distribution systems 40, 60, and 80, the control system 100 of the present invention utilizes similar feedback information to adjust the actuator valve 49.

Like the first material distribution system 40, the second material distribution system 60 shown in FIG. 2C includes an inlet line 44 with a manual supply valve 45, a storage tank 42 for storing a supply of liquid material, an outlet or product distribution line 46 with pump 68, a return line 47 which connects the outlet line 46 and the storage tank 42, a boom 52 with a plurality of boom sections 54, a plurality of outlet ducts in the form of nozzles 56 arranged along each boom section 54, and a shut-off valve 58 for selectively activating and deactivating each boom section 54. Valves 45a and 45b (or a single two-way valve disposed at the junction of the inlet line 44 and the outlet line 46), and sparge valve 47a are also provided for. The pump 68 of the second material distribution system 60, however, is connected to a hydraulic loop designated generally by reference numeral 62. As shown in FIG. 2C, this hydraulic loop 62 includes a driven hydraulic motor 64 with an associated drive shaft 66, a hydraulic fluid return line 67, a source of hydraulic pressure 63 such as a pump driven by the power take-off shaft of the prime mover 20, an actuator valve 49, and a return line 68 from the actuator valve 49 to the reservoir of the source of hydraulic pressure 63. In operation, the actuator valve 49 regulates the hydraulic motor 64 while the drive shaft 66 of the hydraulic motor 64 drives the pump 68. In this way, the pump 68 of the second material distribution system 60 is a hydraulically-controlled, variable-speed pump.

As with the first material distribution system 40, the actuator valve 49 of the second material distribution system 60 is selectively regulated by the control system 100 of the present invention based upon status information received from feedback sensors 50 and boom sensors 59 as well as any user inputs. The operation of the second material distribution system 60 is slightly different than the operation of the first material distribution system 40, however, because the actuator valve 49 is positioned in the hydraulic loop 62 and not in the product distribution line 46. In particular, when the actuator valve 49 is selectively adjusted by the control system 100, the drive shaft 66 of the hydraulic motor 64 rotates at a proportionally different speed which causes the pump 68 to operate at a proportionally different speed. This change in pump operating speed, in turn, causes a proportional change in the material flow rate through the outlet line 46, the activated boom sections 54, and the affiliated nozzles 56.

The third material distribution system 80 is a hydraulically-controlled material distribution system for granular materials. Like the second material distribution system 60 shown in FIG. 2C, the third material distribution system 80 shown in FIG. 2D includes a hydraulic loop 62 having a source of hydraulic pressure 63, an actuator valve 49, a hydraulic motor 64 with an associated drive shaft 66, a return line 67, and a pressure relief line 68. In use, the actuator valve 49 regulates the hydraulic motor 64 and the rotational speed of the drive shaft 66. As shown in FIG. 2D, the third material distribution system 80 also includes a product hopper or bin 82 for containing a supply of granular material or the like, a product conveyor belt 84 for transporting granular material towards one or more outlet ducts or distribution ports 86 of the product bin 82, and a product spreader 88 arranged in or near the distribution ports 86 for controlling the dispersal of granular material therefrom. The product spreader 88 preferably includes one or more spinners which, upon rotation, provide a substantially uniform dispersal of granular material from the distribution ports 86. A feedback sensor 50, such as a tachometer or the like, is also provided for monitoring the rotational speed of drive shaft 66 or any other parameter indicative of material dispersal rate.

In operation, the material dispersal rate through the distribution ports 86 of the product bin 82 is dependent upon the speed of the product belt 84 which, as described above, is regulated by the drive shaft 66 of the hydraulic motor 64. Since the actuator valve 49 controls the hydraulic motor 64, the actuator valve 49 indirectly controls both the speed of the product belt 84 and the resulting material dispersal rate through the distribution ports 86. Indeed, as will be discussed in further detail below, the actuation control valves 49 of all three material distribution systems 40, 60, and 80 are regulated by the control system 100 of the present invention.

In order to minimize the amount of wiring present in the cab 22 of the prime mover 20, the control module 210 of the inventive control system 100 is preferably located outside of the cab 22. In fact, since the control module 210 is the only component of the control system 100 which is directly connected to the actuator 49 and feedback sensors 50 and of the material distribution device 10, the only portion of the control system 100 which must be disposed within the cab 22 is the user console 110. In this way, the vast majority of the wiring required for electrical communication may be located exterior to the cab 22 by positioning the control module 210 outside of the cab 22 and by connecting the control module 210 to the user console 110 with a single

cable connection, such as a CAN bus **310** (e.g., a “Controller Area Network” bus per Bosch specification CAN 2.0). With this advantageous set-up, the CAN bus **310** is the only connecting cable that must enter the cab **22**. Although, as presently contemplated, the CAN bus **310** is the preferred means for coupling the user console **110** to the control module **210**, those skilled in the art will understand, of course, that other communication means such as fiber optic cables, infrared or radio frequency links, or the like may alternatively be employed without departing from the scope or the spirit of the present invention.

Those skilled in the art will also appreciate that, notwithstanding the foregoing explanation of the advantages of mounting the control module **210** outside of the cab **22**, the control module **210** may alternatively be positioned within the cab **22** without departing from the scope or the spirit of the present invention. In addition, those skilled in the art will further appreciate that the disclosed universal control system **100** may alternatively be assimilated into a single housing or unit or may be used with a cab-less material distribution device **10** without departing from the scope and spirit of the present invention.

In any event, the CAN bus **310** preferably comprises two detachable portions **153** and **221** which may be used to selectively couple the control module **210** to the user console **110**. This ability to separate these two components **110** and **210** is particularly advantageous when the control module **210** is secured on a detachable product distribution implement **30**, (e.g., near position **34** in FIG. 2A), because it permits a user to detach the implement **30** from the prime mover **20** in order to use the prime mover **20** with a second implement (not shown). For example, if the second implement is also provided with a control module **210** (generally in the vicinity of position **34** in FIG. 2A), the second implement may be used with the prime mover **20** simply by connecting the control module **210** of the second implement to the user console **110** of the prime mover **210** via the CAN bus **310**. Thus, if a user employs a single user console **110** and more than one control module **210**, with each control module **210** being mounted on a different product distribution implement **30**, switching between implements **30** does not require extensive wiring changes. Instead, it is only necessary to connect the appropriate control module **210** to the CAN bus connector **153** of the user console **110** and to mechanically secure the selected product distribution implement **30** to the prime mover **20**.

Those skilled in the art will also appreciate that a user may still switch between different product distribution implements **30** with the inventive control system **100** even if only one control module **210** is employed. For example, if the control module **210** is mounted on the prime mover **20**, a user may switch between detachable implements **30** by disconnecting all of the wiring associated with the first implement from the control module **210**, and attaching that wiring to the second implement. After the second implement has been identified to the control system **100** via the user console **110**, the control system **100** will be ready to monitor and control the second implement.

As mentioned above, the user console **110** is an input/output device which communicates with the control system **100** of the present invention. To this end, the user console **110** is preferably provided with a display device portion **120** for providing visible status information concerning the control system **100** and the attached product distribution implement **30**, an input panel portion **130** with a plurality of input devices **131–140** for entering information to the control system **100**, and an annunciator (not shown) for producing

audible sounds. In the preferred embodiment, the display device **120** of the user console **110** comprises a liquid crystal display (“LCD”) panel. However, those skilled in the art will readily appreciate that other display devices capable of providing visual information, such as cathode ray tubes, plasma display panels, or the like, may alternatively be employed without departing from the scope or the spirit of the present invention. In addition, although the user console **20** depicted in FIGS. 1A, 3, and 5 includes a single input panel having a plurality of input devices **131–140**, any number of such input panels and devices may alternatively be employed without departing from the scope or spirit of the invention.

In any event, in the preferred embodiment, the input devices of the input panel **130** comprise: (1) an on/off power switch **131**; (2) an alpha numeric keypad **132** for entering data; (3) a set of directional keys **133** for moving a cursor (not shown) about the visual display panel **120** and for incrementing/de-incrementing certain variables; (4) a contrast control switch **134** for changing the contrast of the LCD panel **120**; (5) a plurality of function keys **135** for selecting from one or more menus displayed on the LCD panel **120**; (6) an escape key **136**; (7) a help key **137**; and (8) three mode selection keys **138**, **139**, and **140** whose functions will be described in greater detail below. The input panel **130** may also be connected to an external alarm **144** which alerts the vehicle operator to certain warning conditions.

In order to process information received through the input panel **130**, the user console **110** is provided with a microprocessor (not shown) having associated memory. The memory is preferably divided into a non-volatile memory portion such as a PROM for storing programmed instructions directing the operation of the microprocessor, and an addressable volatile memory portion for storing temporary data during operation. The programmed instructions contained within the non-volatile memory control the operation of the microprocessor, dictate the images and information which are displayed on the LCD panel **120**, and ascribe meanings to various keystrokes made through the input devices **131–140**.

The microprocessor of the user console **110** is operatively connected to various input and output ports which, for organizational purposes, are preferably grouped into two harness assemblies **150** and **170**. As shown in FIG. 5, these two harness assemblies **150** and **170** include a plurality of interface ports which link the user console **110** to various peripheral devices. For example, the first harness **150** includes: (1) power lead **151** which connects to an external battery or power supply **161**, such as the battery of the prime mover **20**; (2) cable **152** which couples to a master switch module **162**; (3) connector **153** which attaches to connector **221** of the control module **210** to provide the CAN bus **310** communication link between the user console **110** and the control module **210**; (4) ignition switch cable **154** which is preferably hard wired to the ignition system of the prime mover **20**; and (5) auxiliary wire **155** which may be connected to an external alarm **144**. The purpose of the master switch module **162** will be discussed in greater detail below.

The second harness **170** is provided with four cable connections **171–174** which connect to various peripheral devices, communication ports, and sensors. Each cable connection **171–174**, will now be addressed in turn.

As shown in FIG. 5, the first cable connection **171** is attached to a ground speed sensor **181** such as a radar device or drive shaft pick-up. Alternatively, the ground speed sensor **181** may be connected to the control module **210** as

will be discussed in greater detail below. In either event, the ground speed sensor **181** provides the user console **110** with information regarding the speed of the material distribution device **10**.

The second cable connection **172** is a general purpose input/output cable, such as an RS-232 communications port, which may be attached to any of a number of peripheral devices. For example, as shown in FIG. 1B, the RS-232 port **172** may be coupled to a personal computer **182** to provide remote control operation of the control system **100** and the material distribution device **10**. The personal computer **182** may also be used to perform certain diagnostic procedures and to upload and/or download data or programmed instructions (i.e., software) for use by the control system **100**. As shown in FIG. 1B, the RS-232 port **172** may be directly connected to an onboard computer **182** (e.g., a portable computer disposed within the cab **22**), indirectly coupled to an off-board computer (e.g., a desktop computer) via a modem link **183**, or indirectly connected to an onboard computer via a PCMCIA modem card **184**. The RS-232 port **172** may also be advantageously coupled to a printer **185** or other suitable output device. With such a set-up, the control system **100** of the present invention may be used to conveniently print out information concerning the control system **100** and/or the material distribution device **10** it controls (i.e., configuration summary reports), as well as information concerning treatment of the field (i.e., application acreage reports).

As a further example, the RS-232 port **172** may also be coupled to a global positioning system ("GPS") **186** to permit the control system **100** of the present invention to automatically interface with a system having mapped recording data concerning the characteristics of the surface being serviced by the material distribution device **10**. Such access may be utilized for the purpose of recording the distribution of material by the product distribution implement **30** or providing the system **100** with variable set-point information. For example, in one embodiment, the RS-232 port **172** provides the control system **100** with site specific set-point information from the GPS system **186** which causes the material distribution device **10** to distribute exactly the desired amount of material at each specific location in the field. As one skilled in the art will appreciate, port **172** may be used in other ways to provide the control system **100** of the present invention with remotely-provided control information. For example, a system for sampling the soil or other site-specific parameters could generate, in near real-time, a control signal, such as a set-point signal, and such a signal could be conveyed to the control system **100** via port **172** to control and vary system operation as a function of such parameters.

In any event, the settings of the RS-232 port **172** are preferably selected by the user from a list of pre-defined settings which enables the port **172** to communicate with a wide variety of devices. The settings of the RS-232 port **172** are preferably set by microprocessor of the user console **110** based upon the user's selections.

As shown in FIGS. 1A and 5, the third cable connection **173** is preferably connected to a sensor **188** which monitors the operable axle of a two axle vehicle, while the fourth cable connection **174** is a ground wire which connects to a grounding surface such as the chassis of the prime mover **20**.

The first and second harness assemblies **150** and **170** are coupled to the microprocessor via interface electronics (not shown). The interface electronics include conventional power conditioning circuitry (not shown) to step the supply

voltage from the battery of the prime mover **20** to a level appropriate for use by the control system **100**. It also includes conventional analog to digital converters and digital to analog converters for converting the input and output signals to a format appropriate for use by the microprocessor and/or the peripheral devices. All of this electronic interface circuitry is conventional and known to those skilled in the art.

As discussed briefly above, the control module **210** is the processing or command center for the control system **100**. As shown in FIGS. 1A, 1B, 4, and 6, the control module **210** is operatively connected to various actuation drivers and sensors which both monitor and control the performance of the material distribution device **10**. In particular, the control module **210** is coupled to feedback sensors **50** (e.g., pressure transducers **254**, flowmeters **252**, and/or application rate sensors **253**) which monitor the material dispersal rate from the product distribution implement(s) **30**, and to other sensors (e.g., boom sensors **59**, product level sensors **272**, and/or application rate sensors **253**) which monitor various operating characteristics of the material distribution device **10**. The control module **210** is also coupled to actuation drivers (e.g., valve actuators) for the control valves **49** which control the material dispersal rate through the outlet ducts of the attached product distribution implement(s) **30**.

Like the user console **110**, the heart of the control module **210** is a microprocessor (not shown). This microprocessor is provided with programmed instructions stored in an associated program memory. As explained in greater detail below, these programmed instructions permit the microprocessor of the control module **210** to monitor and control a plurality of feedback channels coupled to virtually any material distribution device **10** based on a variety of inputs including, for example, the ground speed of the device **10** (set-point as manually fixed or adjustable, or as specified by the GPS **186** or other peripheral device), and other variables including the specific needs of a treated surface. The programmed instructions also permit the microprocessor to monitor the control system **100** and the material distribution device **10** for errors and, to classify any such errors into categories or types which provides the user of the control system **100** with audible and visual indications of the nature of occurring errors.

The microprocessor of the control module **210** is further programmed to monitor the status of the boom sections **54** of the attached product distribution implement **30**. In particular, the microprocessor provides the control module **210** with an indication as to which boom sections **54** are "on" and which boom sections **54** are "off" by monitoring whether the shut-off valves **58** of the monitored boom sections **54** are open or closed. The microprocessor may also provide a mapping system, such as a GPS **186**, with information indicating what areas of the surface have been treated and with how much material. For example, the microprocessor may be programmed to monitor the operation of the nozzles **56** disposed on a monitored boom **58** in calculating the exact amount of material which should be supplied to that boom **58** to achieve a desired material distribution, and to provide a mapping system, such as a GPS **186**, with information concerning the operation of the nozzles **56** so as to accurately record the material distributed by each nozzle **56**.

The microprocessor of the control module **210** is also provided with an addressable random access memory ("RAM") (not shown) for storing data during operation. As those skilled in the art will appreciate, this memory may be implemented in a variety of ways without departing from the

scope of the present invention. For example, the memory may be implemented by a hard disk drive, a floppy disk drive, or memory chips (not shown) depending upon the degree of volatility desired. Similarly, the program memory may be implemented by any of a variety of well known devices including one or more EPROM chips and/or a CD-ROM device. In the preferred embodiment, however, the program memory is implemented by a FLASH and the RAM is implemented by a Static RAM.

As with the user console 110, the control module 210 includes a plurality of input and output ports which, for organizational purposes, are preferably grouped into four vehicle harness assemblies designated by reference numerals 220, 240, 260, and 280, respectively. The microprocessor of the control module 210 is coupled to these four harness assemblies 220, 240, 260, and 280 via interface electronics (not shown) which are implemented similarly to the interface electronics of the user console 110. As such, the interface electronics of the control module 210 include conventional analog to digital converters and digital to analog converters for converting the input and output signals transmitted to and from the microprocessor into a format appropriate for use by the microprocessor and/or the controlled material distribution device 10. All of this electronic interface circuitry is conventional and well known to those skilled in the art.

As best shown in FIG. 6, these four harness assemblies 220, 240, 260, and 280 include a plurality of interface ports which link the control module 210 to the user console 110, to the actuation drivers of the control valves 49, to the feedback sensors 50 (e.g., pressure transducers 254, flowmeters 252, and/or application rate sensors 253), and to various other sensors (e.g., boom sensors 59, product level sensors 272, and/or vapor detectors 273). Each harness assembly 220, 240, 260, and 280 will now be discussed in turn.

The first harness assembly 220 of the preferred control module 210 is a CAN bus harness assembly having a modular connector 221. By attaching this modular connector 221 to connector 153, a convenient CAN bus 310 communication link is provided between the control module 210 and the user console 110.

The second harness assembly 240 is a channel harness assembly which includes four sets of connective cables 241, 242, 243, and 244, respectively. Properly configured, the first set of cables 241 are connected to actuation drivers 251 for the product distribution control valves 49 (which may or may not be included in the same housing as the valves 49 themselves); the second set of cables 242 are connected to various digital feedback sensors 50 such as flowmeters 252 and application rate sensors 253; the third set of cables 243 are connected to various analog feedback sensors 50 such as pressure transducers 254; and the fourth set of cables 244 are connected to various analog diagnostic devices such as tank level sensors (not shown).

The third harness assembly 260 is a boom harness assembly which includes a first set of leads 261, a second set of leads 262, a cable connector 263, and a ground wire 264. Properly configured, the first set of leads 261 interface with up to sixteen boom sensors 59 and/or an implement status switch 274; the second set of leads 262 interface with various digital diagnostic devices including, for example, a hopper level sensor 272 and a vapor detector 273; the cable connection 263 optionally connects to the ground speed sensor 181 (in lieu of the first cable connection 171 of the second harness assembly 170 of the user console 110, if

desired); and the ground wire 264 attaches to a grounding surface such as the chassis of the prime mover 20.

Finally, the fourth harness assembly 280 is an auxiliary harness assembly having a plurality of connectors 281. In use, these connectors 281 are connected to an external power source, such as the battery 161 of the prime mover 20, so as to supply power to the actuation drivers 251 of the product distribution control valves 49.

As mentioned above, the user console 110 also includes input connection 171 for use with ground speed sensor 181. However, coupling the ground speed sensor 181 to the user console 110 may require the presence of an additional lead within the cab 22. In order to avoid cluttering the cab 22 with such a lead, the ground speed sensor 181 may alternatively be connected to the control module 210 via input connector 263 if, for example, the ground speed sensor cable is not required to be in the cab 22 for the vehicle speedometer or for other purposes. In any event, depending upon the user's preference, the ground speed sensor 181 may either be coupled to the user console 110 or the control module 210 without departing from the scope or spirit of the present invention.

Because of these four harness assemblies 220, 240, 260, and 280, the control module 210 of the present invention is capable of sensing numerous feedback signals indicative of material dispersal rate, including three digital feedback signals (from flowmeters 252, application rate sensors 253, and the like), three analog feedback signals (from pressure transducers 254 and the like), four digital diagnostic signals (from vapor detectors 273, hopper level sensors 272 and the like), and four analog diagnostic signals (from tank level sensors (not shown), pressure sensors 254, and the like). The control module 210 is also capable of sensing an input speed signal from the ground speed sensor 181, up to sixteen input status signals from the boom sensors 271, and an application error signal from each actuation driver 251 of the control valves 49.

Based upon these input and feedback signals, the control module 210 generates output signals which precisely regulate one or more actuator drivers 251 of the product distribution control valves 49. In this way, the material dispersal rates of the attached product distribution implements 30 are precisely controlled as the material distribution device 10 traverses a field. In fact, the control module 210 of the illustrated embodiment is capable of controlling up to three different actuator drivers 251.

As shown in FIG. 1A, the control module 210 is preferably coupled to a set of feedback channels 291 and to a set of actuator channels 292 to form a set of separate feedback control loops 290. More specifically, each feedback channel 291 contains a feedback sensor 50 (i.e., a pressure transducer 254, a flowmeter 252, or an application rate sensors 253) for monitoring a parameter indicative of the material dispersal rate, and each actuator channel 292 contains an actuator driver 251 for selectively controlling a product distribution control valve 49. Although the control loops 290 shown in FIG. 1A denotes a three channel system, it will be readily appreciated by those skilled in the art that virtually any number of channels may alternatively be used without departing from the scope or spirit of the present invention.

In operation, each control loop 290 continuously or periodically receives feedback signals from the connected feedback sensor 50 regarding the material dispersal rate. Each control loop 290 also receives input signals from the ground speed sensor 181 regarding the ground speed of the material distribution device 10 and from the boom sensors 59 regard-

ing the status of the monitored boom sections **54** (i.e., whether the shut-off valves **58** for the monitored boom sections **54** are open or closed). Based upon this information, and any set-point changes made by the user or by a peripheral device such as the GPS **186**, the control system **100** of the present invention causes the feedback control loop **290** to transmit an output signal to the appropriate actuator driver **251** which, in turn, causes the desired product distribution control valve **49** to selectively open or close an appropriate amount so as to precisely regulate the resulting material dispersal rate through the boom sections **54**. Indeed, as long as the ground speed of the material distribution device **10** remains within a pre-specified range, the feedback control loop **290** accurately controls the material dispersal rate.

The set-up shown in FIG. 6, for example, provides the control system **100** with three different feedback control loops or channels **290**. In this embodiment, a first control loop is configured for granular material (e.g., sand, salt, cinders, seeds, granular fertilizers, and the like) by having its feedback channel **291** connected to application rate sensor **253**, a second control loop is configured for anhydrous ammonia by having its feedback channel **291** connected to flowmeter **252**, and a third control loop is configured for liquid material (e.g., liquid fertilizers, pesticides, herbicides, fungicides, chemicals, and the like) by having its feedback channel **291** connected to pressure transducer **254**. In other embodiments, the flowmeter **252** may alternatively be used for liquid material, if desired, either instead of or in conjunction with a pressure transducer **254**.

As discussed briefly above, master switch module **162** is connected to the user console **110** via cable **152**. As depicted in FIG. 5, the master switch module **162** may be an independent structure which may be conveniently mounted anywhere within the cab **22** for frequent use by the vehicle operator. Alternatively, the master switch module **162** may be integrally formed with the user console **110**. In either case, the master switch module **162** preferably comprises a single switch which enables all of the control loops **290** of the control system **100** to be selectively activated or deactivated by the vehicle operator. In particular, the master switch module **162** has three operating positions—namely, “auto”, “off”, and “manual”—which correspond, respectively, to the “auto”, “off”, and “manual” modes of the control system **100**. Each of these modes will now be explained in turn.

During automatic operation, the master switch module **162** should be in the “auto” mode. In this mode, the control module **210** monitors and controls the material distribution device **10** coupled to the feedback control loops **290**, based upon variables selected by the vehicle operator such as ground speed of the material distribution device **10**. While in the “auto” and other modes, the control module **210** also monitors the operation of any connected accessories and implement sections such as boom sections **54** or spinners, and automatically provides the user console **110** with information concerning these activities. The user console **110**, in turn, displays the monitored readings on the display device **120** for consideration by the vehicle operator. Although system configurations and most variables may not be changed while in the “auto” mode, the operator may turn channels on and off and manually increment and decrement set points “on the fly” via the directional keypad **133**. The operator may also interrupt the “auto” mode by flipping the master switch module **162** away from the “auto” position.

When the master switch module **162** is flipped to the “off” position, all of the feedback control loops **290** are disabled,

and the discharge of material from the material distribution device **10** is halted. The control system **100**, however, continues to monitor the input devices of the input panel **130** for data input by the vehicle operator. More specifically, by stepping through various user friendly menus and entering appropriate data, the operator may: identify the characteristics of the material distribution device **10**; perform diagnostic procedures; print out formal reports; and perform other desirable housekeeping and configuration procedures.

Finally, when the master switch module **162** is switched to the “manual” mode, the control system **100** uses pre-defined default values as inputs in order to open all of the product distribution control valves **49** of the attached material distribution device **10** a pre-defined amount. The “manual” position generally used only when the material distribution device **10** is moving at very slow speeds. This mode is useful, for example, in dumping or otherwise flushing excess material from the material distribution device **10**. To avoid inadvertent dumping of excessive amounts of material, the “manual” position is preferably spring-loaded for momentary contact. As such, the operator must intentionally hold the master switch **162** in the “manual” position or the switch **162** will automatically bounce out of that position.

When the master switch module **162** is in the “auto” position or mode, the control system **100** of the present invention is programmed to provide a substantially uniform material dispersal rate per unit area as the material distribution device **10** traverses a field. In particular, the inventive control system **100** automatically adjusts the product distribution control valve **49** based upon the ground speed of the material distribution device **10**, as indicated by the ground speed sensor **181**, and the material application width, as indicated by the boom sensors **59**. For example, if some of the boom sections **54** are selectively deactivated by closing particular shut-off valves **58**, the control system **100** will automatically adjust the product distribution control valve **49** so that a substantially uniform material dispersal rate is achieved through the open boom sections **54**. Put another way, the material dispersal rate through the open boom sections **54** will remain virtually unchanged vis-a-vis the material dispersal rate through these same boom sections **54** prior to closing the shut-off valve **58** and deactivating the boom section **54**.

If, however, all of the boom sections **54** are deactivated—e.g., when the material distribution device **10** is turning around at the end of a field or is traveling across a non-treated section of the ground—the inventive control system **100** has a control-valve locking feature which positionally locks the product distribution control valve **49** in its last controlled position (i.e., its position prior to closing the shut-off valves **58** and deactivating the boom sections **54**). By “locking” the control valve **49** in its last controlled position, a substantially stable pressure level is maintained in the product distribution line **46** between the control valve **49** and the shut-off valves **58**. This, in turn, advantageously prevents the development of air pockets in the product distribution line **46**, as well as the misapplication (i.e., either the over-application and the under-application) of material through the boom sections **54** once the shut-off valves **58** are eventually re-opened.

In operation, this control valve locking feature of the inventive control system **100** functions in the following manner and provides the following desirable results. When all of the shut-off valves **58** are closed by the operator, the control module **210** receives a corresponding signal from the boom sensors **59** which is interpreted as a material applica-



tion width which is equal to “zero” (i.e., the effective operating boom width is interpreted as “zero” because all of the shut-off valves **58** are closed). Upon receiving such a signal, the inventive control system **100** transmits an output signal to the actuation driver **251** which positionally locks the product distribution control valve **49** at its last controlled position. By locking the control valve **49** in this way, a substantially stable pressure level in the product distribution line **46** is maintained after the shut-off valves **58** are closed. In this regard, the control valve locking feature of the inventive control system **100** disregards the automatic override of prior art control systems (i.e., programming which completely closes the control valve **49** when all of the shut-off valves **58** have been closed by the operator). In any event, when one or more of the shut-off valve **58** are eventually re-opened by the operator, the material dispersal rate through the re-activated boom sections **54** will resume at a level substantially equal to the material dispersal rate just prior to shut-off valve **58** closure and boom **52** deactivation. The function just described can be implemented in the software of the control system **100** and, conceptually, is illustrated by the flow chart of FIG. 7.

Thus, in accordance with several important objects of the present invention, this control valve locking feature of the inventive control system **100** prevents a substantial increase or decrease of pressure in the product distribution line **46** when all of the shut-off valves **58** are closed, prevents the formation of air pockets in the product distribution line **46**, and prevents or substantially lessens the over-application and the under-application of material once the shut-off valves **58** and the associated outlet ducts or nozzles **56** are eventually re-opened.

In keeping with another important aspect of the present invention, the inventive control system **100** also has a loading feature which enables liquid material to be safely, reliably, and conveniently delivered to the product tank **42** of material distribution device **10** from an external supply vehicle such as a nurse truck (not shown). In fact, once the external supply source is connected to the inlet line **44** of the product distribution implement **30**, the pump **68** of the product distribution implement **30** may then be used to conveniently draw liquid material from the external supply source and into the supply tank **42** simply by closing shut-off valves **58**, opening valves **45** and/or **45a**, closing valve **45b**, opening valve **47a**, and energizing the pump **68**. In the case of a two-way valve (not shown) disposed at the junction of the inlet and outlet lines **44** and **46**, liquid material may be conveniently drawn into the product tank **42** simply by closing shut-off valves **58**, opening valve **45**, positioning the two-way valve such that the inlet line **44** is open and the outlet line **46** is closed, and energizing the pump **68**. If, on the other hand, the control valve **49** is located along the return line **47** in place of the sparge valve **47a**, liquid material may be conveniently drawn into the product tank **42** simply by closing shut-off valves **58**, opening valves **45** and/or **45a**, closing valve **45b**, opening control valve **49**, and energizing pump **48**. In any event, the supply tank **42** may be conveniently and rapidly supplied with liquid material without the assistance of supplementary pumps or auxiliary plumbing.

To initiate this loading feature, the operator simply enters the set-up mode of the control system **100** by activating the appropriate mode selection key **138–140** of the user console **110** and then selects the “loading” option from the menu displayed on the LCD panel **120** of the user console **110**. Once selected, the control system **100** sends a warning indicating an improper operating condition, and transmits an

output signal to the actuation driver **251** instructing it to completely open the product distribution control valve **49**. Once the control valve **49** is completely open, an error signal is sent to the control module **210** indicating a wide-open control valve **49** condition. In response to this error signal, the control system **100** closes the valve **49** slightly to remove this error condition. This loading process continues until the operator selects the “stop” option (i.e., when the storage tank **42** is full).

In order to prevent the accidental dispersal of material through the booms **52**, the control system **100** is programmed so that this loading feature may not be activated when the master switch module **162** is in the “auto” position or when the boom sensors **59** indicate that any of the shut-off valves **58** are open (i.e., when any of the associated boom sections **54** are enabled). In addition, once activated, the control system **100** will automatically terminate this loading function if any shut-off valves **58** are subsequently opened or if the master switch module **162** is subsequently placed in the “auto” position. The loading function can be implemented in the software of the control system **100** and, conceptually, is illustrated by the flow chart of FIG. 8.

In accordance with yet another important aspect of the present invention, the inventive control system **100** also includes an agitation feature which allows liquid material to be selectively agitated while the material distribution device **10**, for example, is en route to an application site or is traversing a field. This agitation feature is especially useful for certain liquid materials which need to be mixed before discharge, such as suspensions.

When the shut-off valves **58** and valve **45a** are closed, a product recirculation loop is formed along the outlet line **46** and the return line **47** of the liquid distribution systems **40** and **60**. As shown in FIGS. 2B and 2C, this product recirculation loop starts at the product tank **42**, proceeds through the outlet line **46** to a point **43** where the inlet line **44** and the outlet line **46** converge or intersect, and thereafter proceeds through the return line **47** and the sparge valve **47a** to the product tank **42**. In operation, liquid material continuously circulates through this product recirculation loop when the shut-off valves **58** and valve **45a**, are closed and pump **48** or **68** is activated. In the case of a two-way valve (not shown) disposed at the junction of the inlet and outlet lines **44** and **46**, liquid material continuously circulates through this product recirculation loop when the shut-off valves **59** are closed and the two-way valve is positioned such that the inlet line **44** is closed and the outlet line **46** is open. Of course, when some of the shut-off valves **58** are eventually re-opened, liquid material will then flow to the enabled boom sections **54** and out through the nozzles **56**.

To initiate the agitation feature of the present invention, the operator simply closes valves **58** and **45a**, enters the set-up mode of the control system **100** by activating the appropriate mode selection key **138–140** of the user console **110**, and then selects the appropriate option from the menu displayed on the LCD panel **120** of the user console **110**. Once selected, the control system **100** transmits an output signal to the actuation driver **251** instructing it to open the product distribution control valve **49** so that liquid material may be circulated through the product recirculation loop. This process continues until the control module **210** receives a signal from the boom sensors **59** indicating that one or more boom shut-off valves **58** are open, until the operator selects the “stop” option, or until the master switch module **162** is moved out of the “off” position. The agitation function can be implemented in the software of the control system **100** and, conceptually, is illustrated by the flow chart of FIG. 9.



In accordance with still another important aspect of the present invention, the inventive control system **100** also has an unloading feature which provides for the automatic, reliable, and rapid discharge of excess granular material from the product bin **82** of a granular product distribution system **80** in a safe manner. If, for example, excess granular material remains in the product bin **82** following the treatment of a field, this unloading feature permits the operator to position the product distribution implement **30** at a desired location and automatically unload the remaining material.

To initiate this unloading feature, the operator simply enters the set-up mode of the control system **100** by activating the appropriate mode selection key **138–140** of the user console **110** and then selects the appropriate option from the menu displayed on the LCD panel **120**. Once selected, the control system **100** transmits an output signal to the actuation driver **251** instructing it to completely open the product distribution control valve **49**. Once the control valve **49** is completely open, an error signal is sent to the control module **210** indicating a wide-open control valve **49** condition. In response to this error signal, the control system **100** closes the valve **49** slightly to remove this error condition. This unloading process continues until the operator selects the “stop” option (i.e., when the product bin **82** is empty).

As a safety precaution, this loading feature may not be activated if the control system **100** detects that the ground speed of the material distribution device **10** is greater than a predetermined value, such as five miles-per-hour. This loading feature will also cease functioning if the master switch module **162** is moved out of the “off” position. In any event, the control system **100** only permits the discharge of material when the material distribution device **10** is either stationary or traveling at a low rate of speed. The unloading function can be implemented in the software of the control system **100** and, conceptually, is illustrated by the flow chart of FIG. **10**.

While the present invention has been described and disclosed with an emphasis upon preferred embodiments and procedures, it will be understood, of course, that the present invention is not strictly limited thereto. Since modifications may be made to the structures and procedures disclosed herein—particularly in light of the foregoing teachings—without departing from the present invention, the following claims are intended to cover all structures that fall within the scope and spirit of the present invention.

What is claimed is:

**1.** A control system for regulating the operation of a mobile material distribution device, the material distribution device including a supply of material, a boom with at least one boom section, a shut-off valve associated with each boom section, and a control valve for regulating the flow of material to said at least one boom section, said at least one boom section including at least one outlet duct for dispensing material therefrom, the control valve being movable into a plurality of controlled positions, each controlled position providing a material dispersal rate through said at least one outlet duct, the control system comprising:

a boom sensing input for monitoring the operational status of each boom section; and

a processing system for maintaining a substantially stable pressure level between the control valve and each shut-off valve by positionally locking the control valve at its last controlled position upon receiving a signal from the boom sensing input indicating the shut-off valve associated with each boom section is closed.

**2.** The control system set forth in claim **1**, wherein the processing system includes:

a user console including a display device for visually displaying information concerning the control system and the material distribution device and further including at least one input device for entering data into the control system; and

a control module for receiving input signals from the boom sensing input and other feedback sensors associated with the material distribution device, for transmitting performance information to the user console, and for generating output signals which regulate the control valve.

**3.** The control system set forth in claim **2**, wherein the user console and the control module are contained within a single housing.

**4.** The control system set forth in claim **2**, wherein the user console and the control module are connected via a communication link.

**5.** The control system set forth in claim **4**, wherein the communication link is a bus having a connector for selectively attaching and detaching the control module to the user console.

**6.** The control system set forth in claim **1**, wherein the material is in liquid form and the outlet ducts are nozzles.

**7.** The control system set forth in claim **6**, further comprising:

a pump arranged between the supply of material and the shut-off valve for pressurizing the liquid material.

**8.** The control system set forth in claim **7**, wherein the supply of material is contained within a product tank, and wherein material from an external supply source is drawn into the product tank by the pump.

**9.** The control system set forth in claim **7**, wherein the pump is a variable-speed pump connected to a hydraulic motor, the hydraulic motor being disposed in a hydraulic loop which includes the control valve, the control valve regulating the operating speed of the hydraulic motor.

**10.** The control system set forth in claim **9**, wherein the supply of material is contained within a product tank, and wherein material from an external supply source is drawn into the product tank by the pump.

**11.** The control system set forth in claim **1**, further comprising:

a feedback sensor disposed downstream of the control valve and operatively connected to the control module for monitoring a parameter indicative of the material dispersal rate.

**12.** The control system set forth in claim **11**, wherein the parameter indicative of the material dispersal rate is pressure and the feedback sensor is a pressure transducer.

**13.** The control system set forth in claim **1**, further comprising:

a feedback sensor disposed upstream of the control valve and operatively connected to the control module for monitoring a parameter indicative of the material dispersal rate.

**14.** The control system set forth in claim **13**, wherein the parameter indicative of the material dispersal rate is flow and the feedback sensor is a flowmeter.

**15.** The control system set forth in claim **6**, wherein the material distribution device includes an outlet line which connects the supply of material and said at least one boom section, a pump disposed along the outlet line, an inlet line which intersects the outlet line at a point between the pump and the supply of material, a return line which connects the

## 21

supply of material and the outlet line at a point downstream of the pump, and at least one valve for selectively closing either the inlet line or the outlet line.

16. The control system set forth in claim 15, wherein the pump circulates liquid material in a product recirculation loop when said at least one valve is positioned so that the inlet line is closed and the outlet line is open, the shut-off valve associated with each boom section is closed, and the control module transmits an output signal to the control valve instructing it to open, the product recirculation loop comprising the return line, the supply of material, the pump, and at least a portion of the outlet line.

17. The control system set forth in claim 1, further comprising:

a speed sensor for monitoring the ground speed of the material distribution device.

18. The control system set forth in claim 17, wherein the control module maintains the material dispersal rate per unit area covered through each enabled boom section at a substantially uniform level by selectively adjusting the control valve in response to information received from the boom sensing input.

19. A method of regulating the material dispersal rate from a mobile material distribution device, the material distribution device including a supply of material, a boom with at least one boom section, a shutoff valve associated with each boom section, and a control valve for regulating the flow of material to said at least one boom section, said at least one boom section including at least one outlet duct for dispensing material therefrom, the control valve being movable into a plurality of controlled positions, each controlled position providing a material dispersal rate through said at least one outlet duct, the method comprising the steps of:

## 22

monitoring the operational status of each boom section; and

positionally locking the control valve at its last controlled position upon receiving a signal from each boom section indicating the shut-off valve associated with each boom section is closed.

20. A method of operating a mobile material distribution device comprising the following steps:

moving the device over a first area of ground at a speed which may change;

dispersing a material from at least one boom section on the device while the device is moving over said first area of ground;

continuously supplying said material to said boom section, via a line from a container on the device to said boom section, at a flow rate which is a function of the speed of the device while said material is dispersing;

controlling said rate by controlling a control valve having a plurality of controlled positions;

closing a shut-off valve disposed in said line to stop the flow of material to said boom section;

positionally locking said control valve at its last controlled position as a result of the shut-off valve closing;

moving the device over a second area of ground over which no material is dispersed from said boom section;

re-opening said shut-off valve to resume dispersing material from said boom section; and

unlocking said control valve as a result of said shut-off valve re-opening to resume controlling said rate by controlling said control valve.

\* \* \* \* \*