


Druck DPI 150

Pressure Indicator

User manual - K344






[EN]	English	1 20
[FR]	French	TBA
[DE]	German	TBA
[IT]	Italian	TBA
[PT]	Portuguese	TBA
[ES]	Spanish	TBA

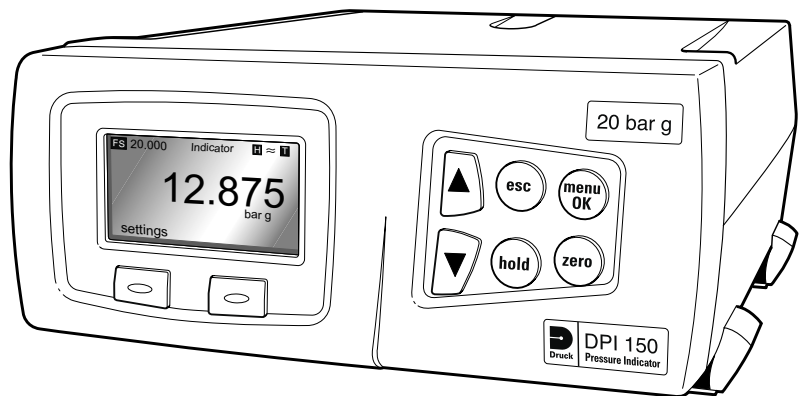

Approved Service Agents

To find the approved agents for the servicing of GE products:

www.gesensing.com

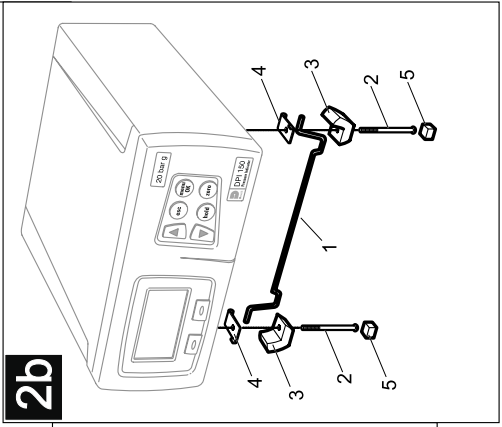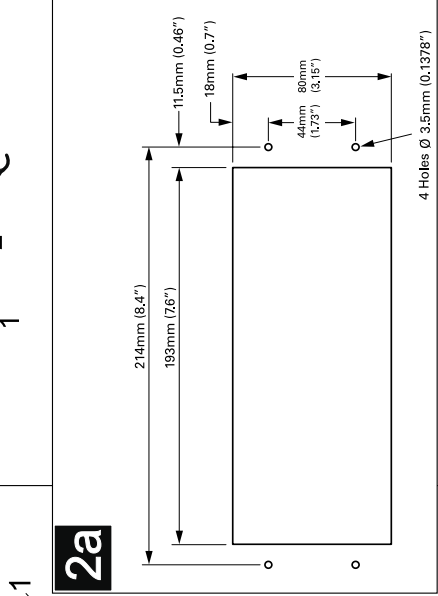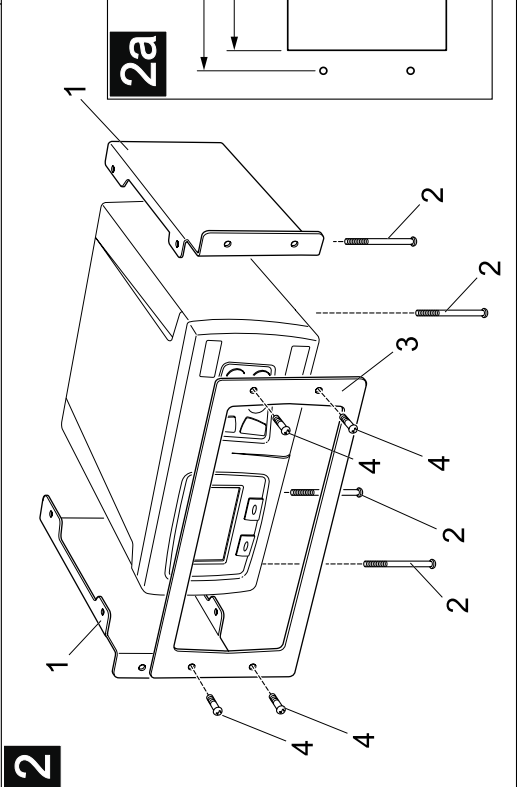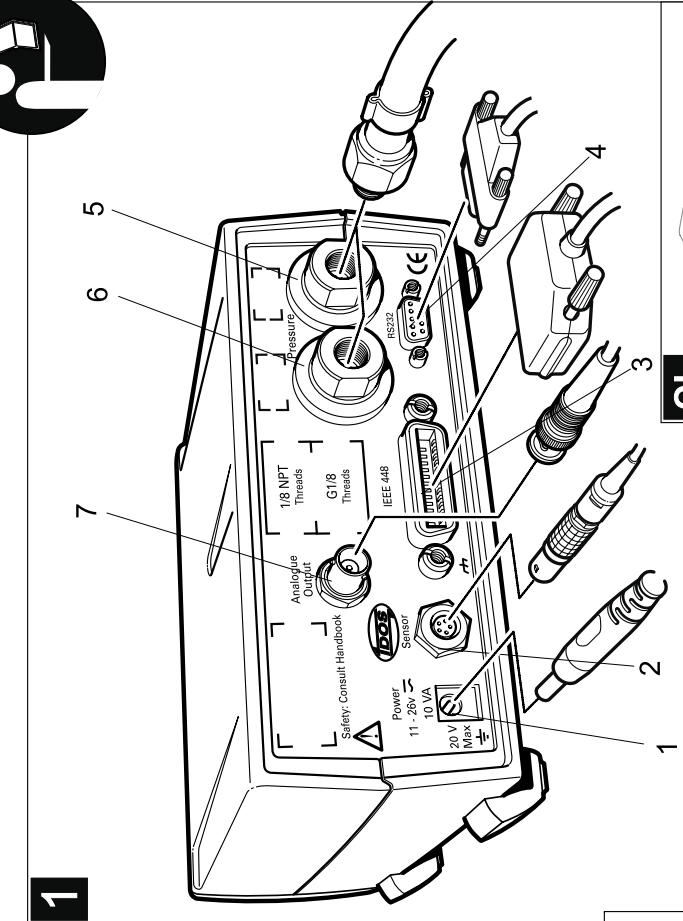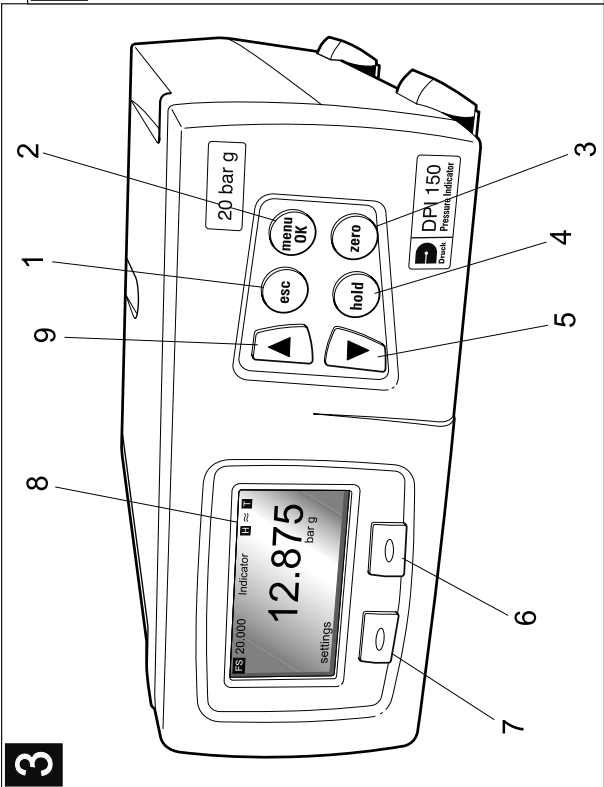

General Introduction

This manual provides operating instructions for the DPI 150 Pressure Indicator compatible with the requirements of operating the instrument.

Safety

The manufacturer has designed this equipment to be safe when operated using the procedures detailed in this manual. The user must not use this equipment for any other purpose than that stated.

This manual contains safety and operating instructions that must be followed to make sure of safe operation and to keep the equipment in a safe condition. The safety instructions are either warnings or cautions issued to protect the user and the equipment from injury or damage. Use suitably qualified personnel and good engineering practice for all procedures in this manual.

Pressure

Do not apply pressure greater than the maximum working pressure stated in the specification.

Technical advice

For technical advice contact the manufacturer or subsidiary.

Supervisor Security for the Druck DPI 150

GE strongly advise protection of the set-up menus in this equipment.

Unauthorised access to the supervisor and calibration menus can result in degraded performance, incorrect settings and inaccuracies. The factory set PIN are as follows:

Supervisor set-up - 0268 press MENU OK

Calibration set-up - refer to Service Manual K382

Codes can be changed to another code of 4 digits; entering 0000 disables this security facility.

Symbols

The following symbols mark this equipment:



Refer to the manual.



This product meets the essential requirements of the relevant EC directives.

Druck DPI 150 User Manual

ABBREVIATIONS

The following abbreviations are used in this publication.

Note: *Abbreviations are the same in the singular and plural.*

abs	absolute	lbs	pounds
BSP	British Standard Pipe (thread)	m	metre
CAS	calibrated airspeed	mbar	millibar
°C	degrees Celsius	mm	millimetre
const	constant	mmH ₂ O	millimetres of water
DMM	Digital multimeter	MWP	maximum working pressure
DPI	digital pressure indicator (GE product)	NPT	National Pipe Thread
esc	escape	PIN	personal identification number
°F	degrees Fahrenheit	psi	pounds per square inch
g	gauge	Ref.	reference
(h)	hour	RS232	serial interface communication standard
IDOS	intelligent digital output sensor (GE product)	SCPI	standard commands for programmable instruments
IEEE 488	institute of electrical and electronic engineers standard 488 data	(s)	seconds
inHg	inches of mercury	TAS	true airspeed
kg	kilogram	TBA	to be advised
kts	knots		

CONTENTS

Title	page
Approved service agents	inside front cover
Introduction	1
Specification	1
Installation	2
Connections	3
Analogue Output Option	4
Panel mounting	4
Bench stand	5
Operation	7
Select mode menu	8
Indicator mode	9
User set-up	11
Pressure leak test	12
Airspeed leak test	13
Airspeed	14
Mach	15
Supervisor set-up	16
Status	19

Associated publications

The following e-documents can be downloaded from www.gesensing.com, available from February 2005 onwards.

SCPI Communications Manual.....	K381
Calibration Instructions	K382

Introduction

The Druck DPI 150 high accuracy, single-range pressure indicator uses the Druck IDOS sensor to produce pressure readings in units of pressure measurement and aeronautical units.

The instrument is contained in a moulded plastic case with integral rubber feet for workbench surface use. Function keys, on the front panel, allow the user to access an operating menu and set-up menu. Two more menus, supervisor and calibration, allow the user to change the PIN codes, communications settings and display language and for calibration of the pressure sensor. A four digit PIN code protects both these facilities. The electrical and pressure connections are located on the rear panel.

The instrument is supplied, as standard, with a RS232 data interface. Options available include an IEEE 488 interface, an analogue output, a barometric reference, negative calibration, external sensor and panel mount kit.

Specification

Conformity

Safety	EN61010
EMC emission	EN61326
EMC immunity	EN61326

Gauge pressure ranges

.....	25, 70, 200, 350, 700 mbar
.....	1, 2, 3.5, 7, 10, 35, 70, 100, 135 and 200 bar

Absolute pressure ranges (using option E, barometric reference)

..... add atmospheric pressure to the above gauge pressures

Maximum working pressure

0 to 350 mbar	2.0 x full-scale
0.7 to 2 bar, 3.5 to 70 bar, >100 bar	1.2 x full-scale

Precision

(includes non-linearity, hysteresis, repeatability and temperature effect between 18°C and 28°C [65° to 82°F])

below 1 bar.....	0.03% full-scale
1 bar to 200 bar	0.01% full-scale
Stability <i>below 1 bar</i>	0.02% of reading/year
Stability <i>above 1 bar</i>	0.01% of reading/year

Option E, barometric reference

Pressure range	750 to 1150 mbar absolute
Precision	0.15 mbar

Accuracy

(includes non-linearity, hysteresis, repeatability and temperature effect between 5°C and 50°C [41° to 120°F])

Stability	0.15 mbar/year
-----------------	----------------

Druck DPI 150 User Manual

Environmental

Temperature

Operating 5° to 50°C (41° to 122°F)

Calibrated 23°C (74°F)

Storage -20° to 60°C (-4° to 140°F)

Humidity complies with Def. Stan. 66-31 8.6 cat 3

Vibration complies with Def. Stan. 66-31 8.4 cat 3

Shock mechanical shock conforms to EN 61010

Pressure connections (female): G1/8 or 1/8 NPT

Weight (approximate): 1 kg (2.2 lbs)

Dimensions

Length 195 mm (7.7")

Width 185 mm (7.2")

Depth 75 mm (3.0")

Analogue Option Electrical Specification

Isolated Voltage Output:-

Output Impedance 5 Ohm

Maximum Load Capacitance 10 nF

Isolated Current Output:-

Maximum Load Impedance 900 Ohm

Maximum Load Capacitance 10 nF

Accuracy

(including pressure measurement uncertainty)

All voltage and current ranges ±0.05 % FS (18° to 28°C, 12 months)

Update rate 30 updates per second

Installation

Key to **1**


- | | |
|---|---|
| 1 power supply | 4 RS232 connector |
| 2 external sensor connector
UPM or UPM-P | 5 G1/8 or 1/8 NPT gauge pressure connector |
| 3 IEEE 488 (option) | 6 G1/8 or 1/8 NPT barometric pressure connector |
| | 7 analogue output connector (option) |

Connections


Note: Switch off the power supply before connecting or disconnecting the instrument. Isolate the pneumatic supply pressures and depressurise the pipes before connecting or disconnecting the instrument.

1. Use an appropriate sealing method for all pressure connections.

Method of connection 1/8 BSP (G1/8)




recommended method
*mandatory method 100 bar and above






alternative method below 100 bar

Connections for gauge operation

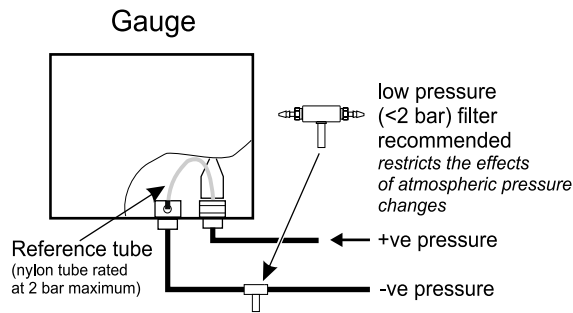

Connections for barometric option

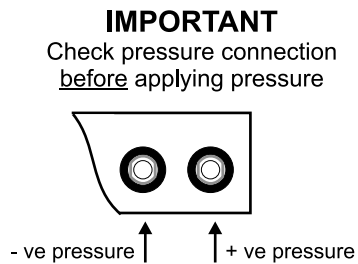

2. Before use, make sure the SELV power adaptor supplied with the instrument is correct for the power supply voltage. The Safety Extra Low Voltage (SELV) power adaptor complies with EN61010 (including safety requirements for laboratory instruments).

Druck DPI 150 User Manual

Using other power adaptors


Responsibility of the User

A power adaptor, not supplied with the instrument, must comply with the SELV safety requirements of EN61010:

Voltage AC or DC	Power	Polarity
11 to 26	10VA	non-sensitive

3. Connect the power adaptor to the instrument and switch the power supply on.

Analogue Output Option

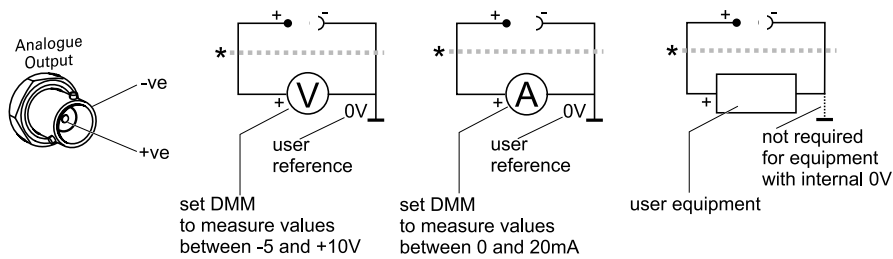

* If necessary, use ferrite ring and twist pair wiring to reduce electrical interference.

Example ferrite ring:

RS Components part numbers
7427114
7427122
74270095

Panel mounting **2** and **2a**

A panel mounted instrument must have the rubber feet removed for the side plates to be secured. The instrument fits into a panel cut-out, the side and front plates of the panel mount kit (option C) secures the instrument to the panel. It is important that a panel mount installation provides enough circulation of air to cool the instrument.

Key to **2**

- 1 side plate
- 2 screw 45mm (*not part of kit*)
- 3 front plate
- 4 screw 3.5mm

Procedure **2**

To fit this option requires a panel cut-out of the dimensions shown in **2a**.

English

1. Remove the rubber inserts in the feet of the instrument.
2. Unscrew and remove two 45mm screws (2) attaching two feet on one side of the instrument casing. Retain the two 45mm screws for the next step.
3. Fit the side plate (1) to the side of the instrument casing and secure with the two 45mm screws.
4. Repeat steps 2 and 3 for the other side plate.
5. Locate the assembled instrument behind the cut-out panel and align the four 3.5mm holes in the panel and the holes in the flanges of the side plates (1).
6. Locate the front plate (3) over the front of the protruding instrument and secure the front plate with the four screws (4).

Bench stand 2b


The bench stand lifts the front of the instrument providing a better angle of display and key-pad access for the user.

Key to 2b

- 1 stand
- 2 screw 45 mm
- 3 foot
- 4 clip, (left and right)
- 5 insert, rubber

intentionally left blank


Operation

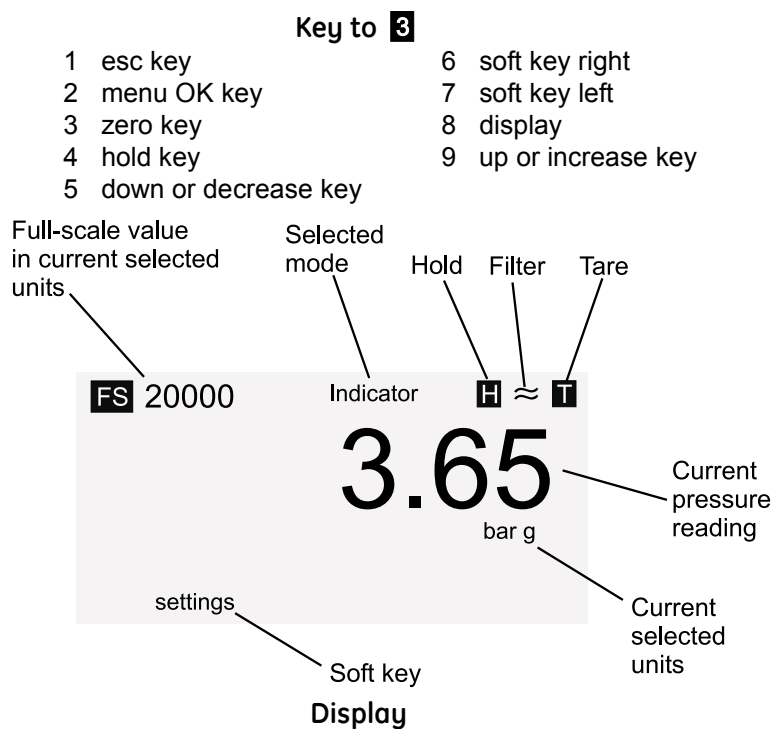

Front Panel Keys
Function and Comments


- | Key | Function and Comments |
|------------|--|
| | Steps back one selection without changing setting. |
| | Steps back one selection sets and saves value. Selects and enters menu. |
| | Moves cursor up and down screen. Increases and decreases value of selected digit. |
| | Freezes displayed value, the instrument continues measuring but does not display measured value until key pressed again. |
| | Changes displayed value to 0.000 and stores the difference (offset) in non-volatile memory of the pressure sensor. |

Select mode menu

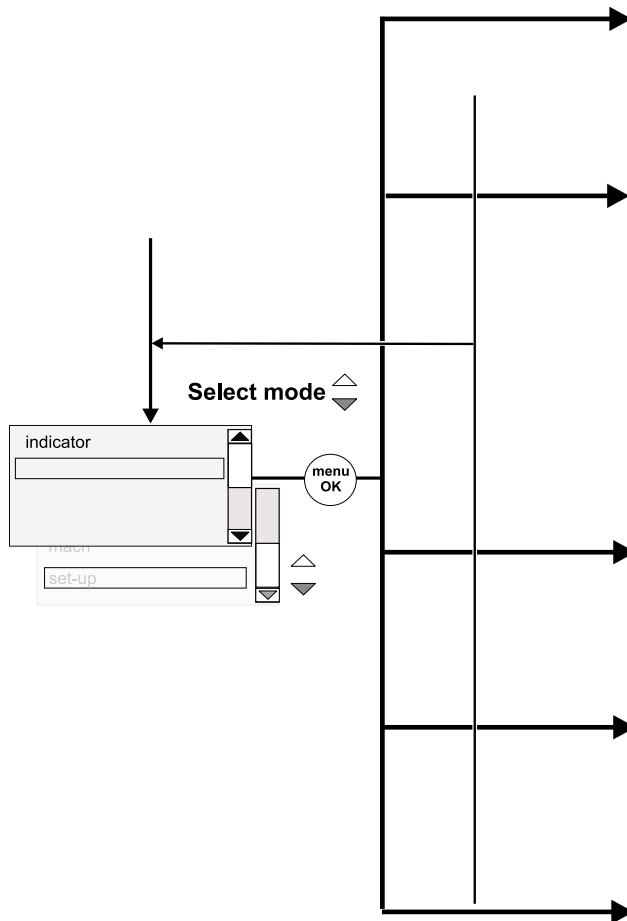

Indicator mode


English

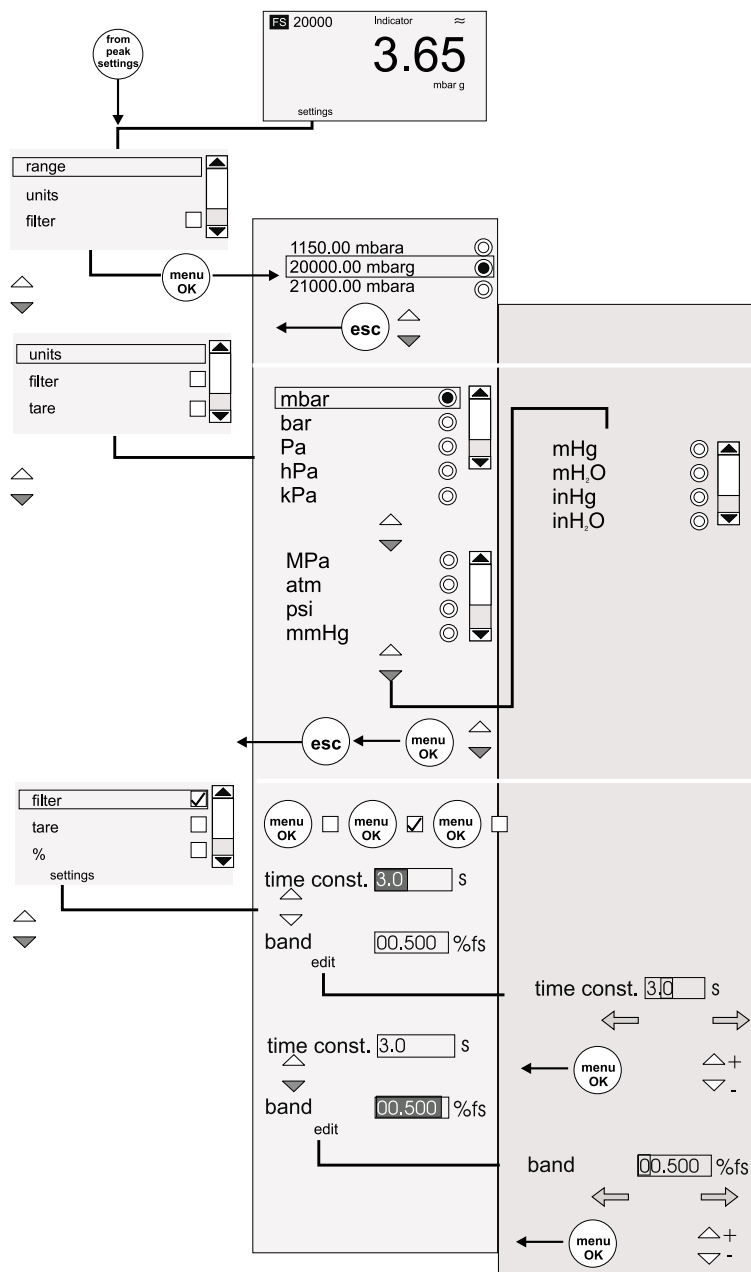

continued/....


Druck DPI 150 User Manual

Indicator mode continued

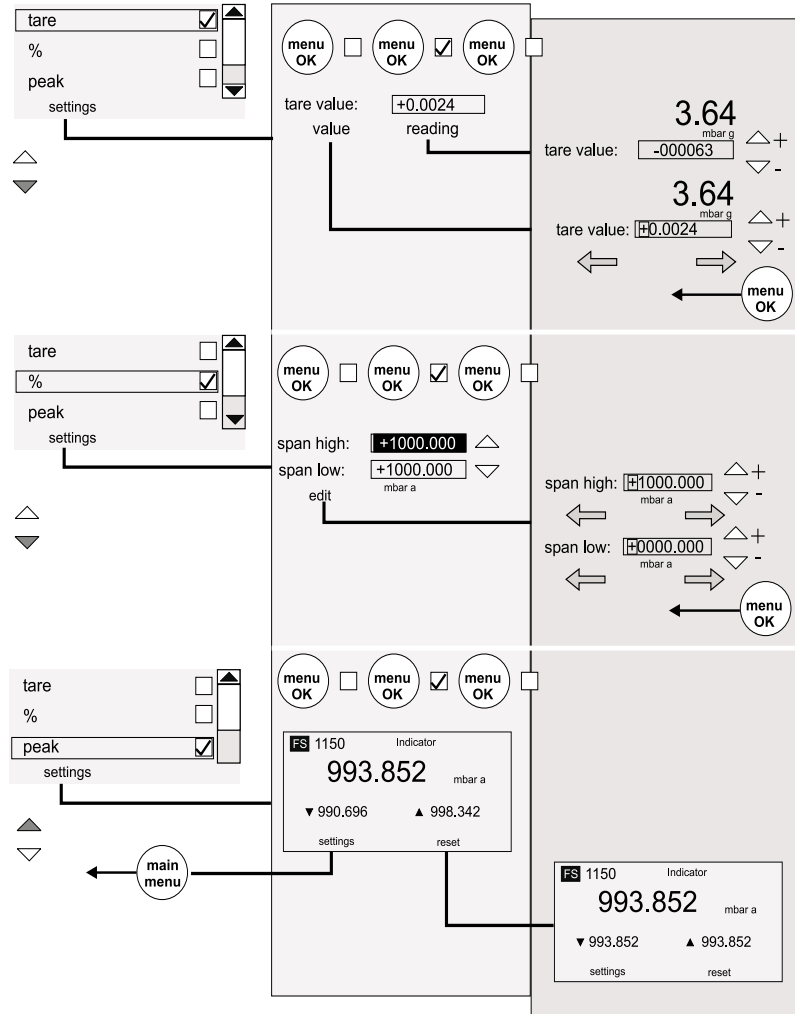


User Set-up

English

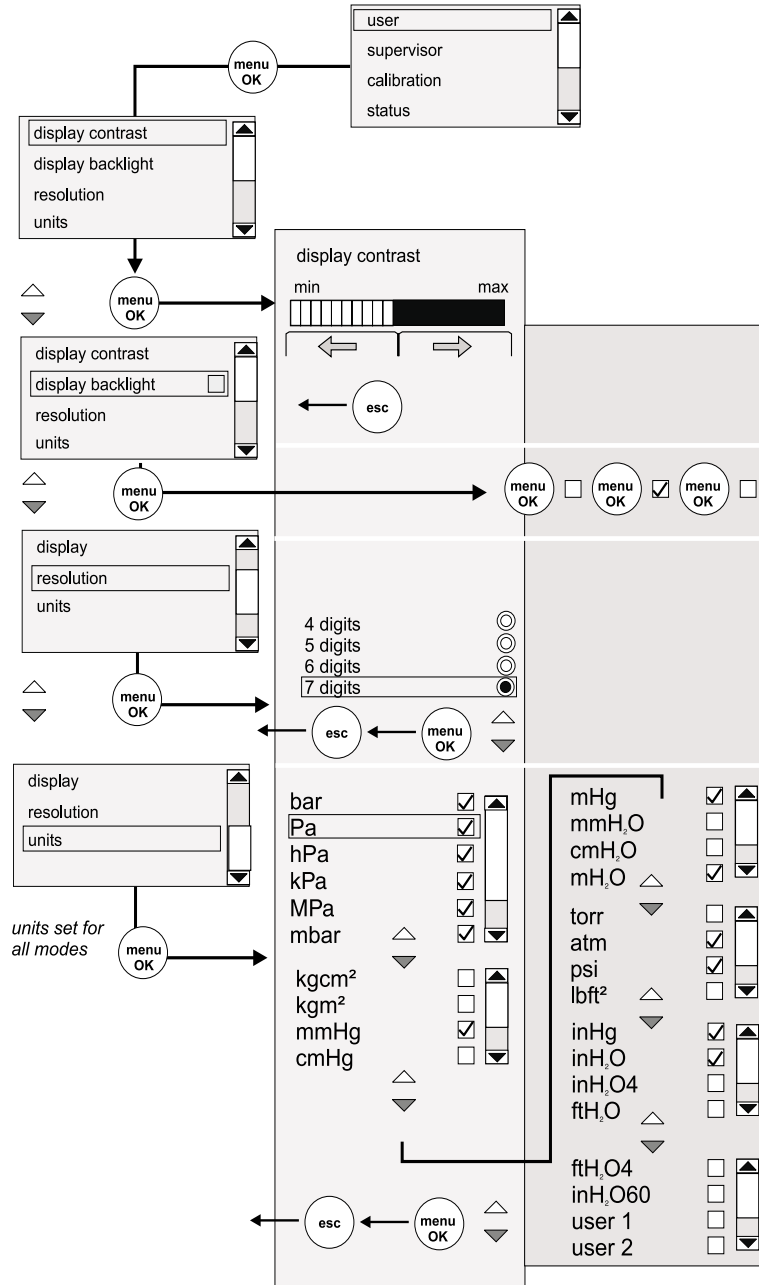


Druck DPI 150 User Manual

Pressure leak test

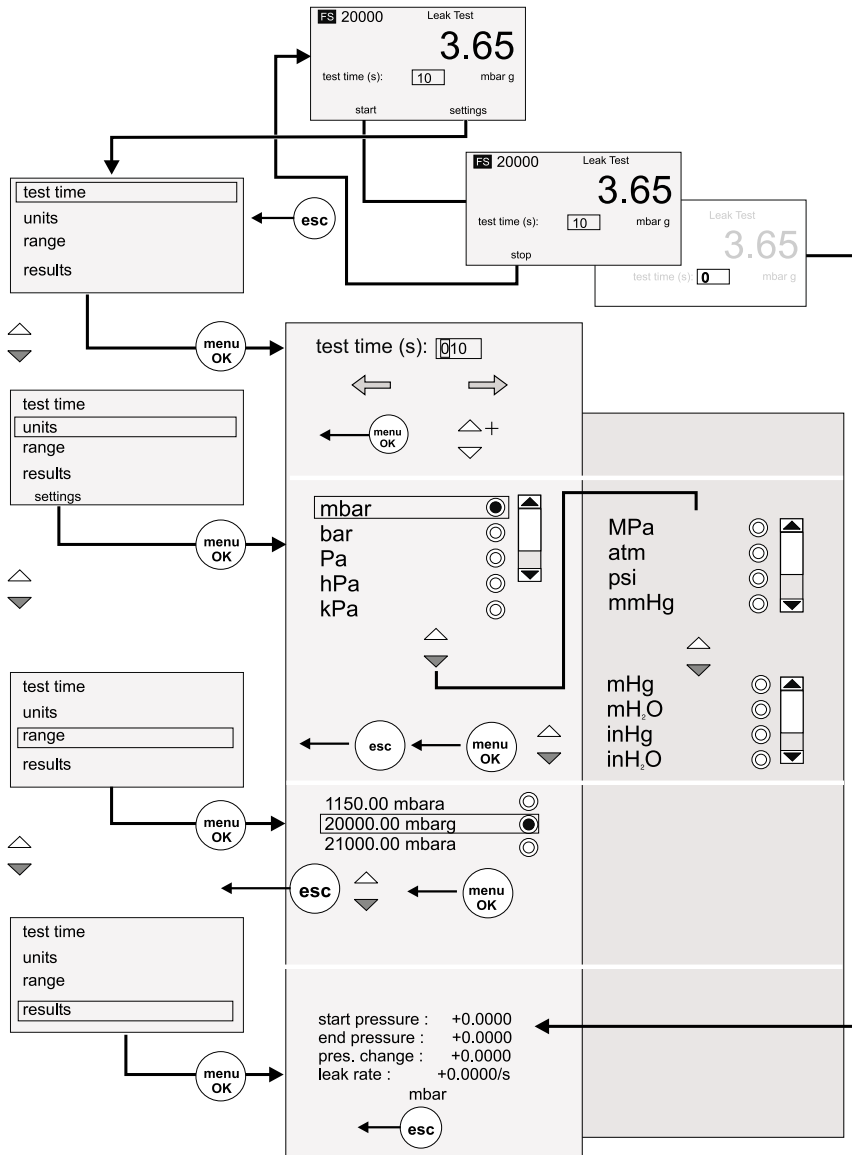

Airspeed leak test
(must be correctly enabled)


English

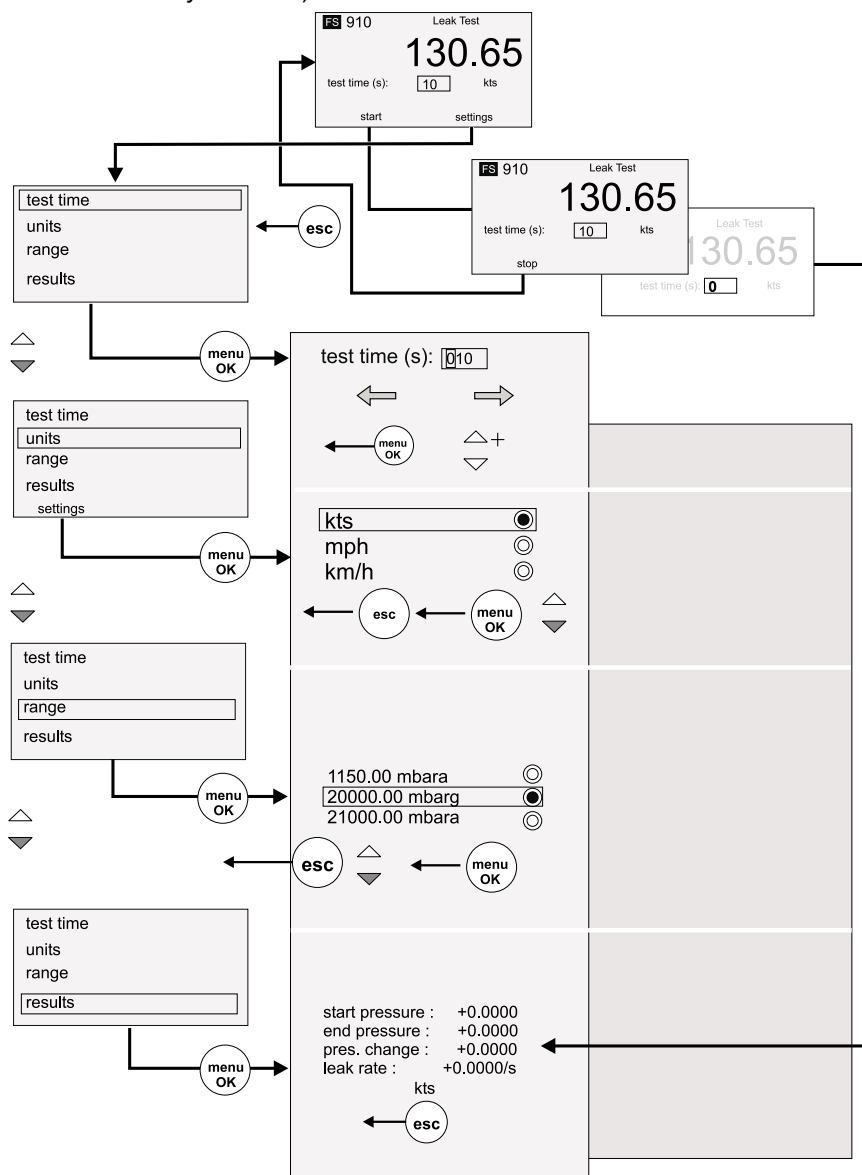

Druck DPI 150 User Manual


Airspeed

(must be correctly enabled)

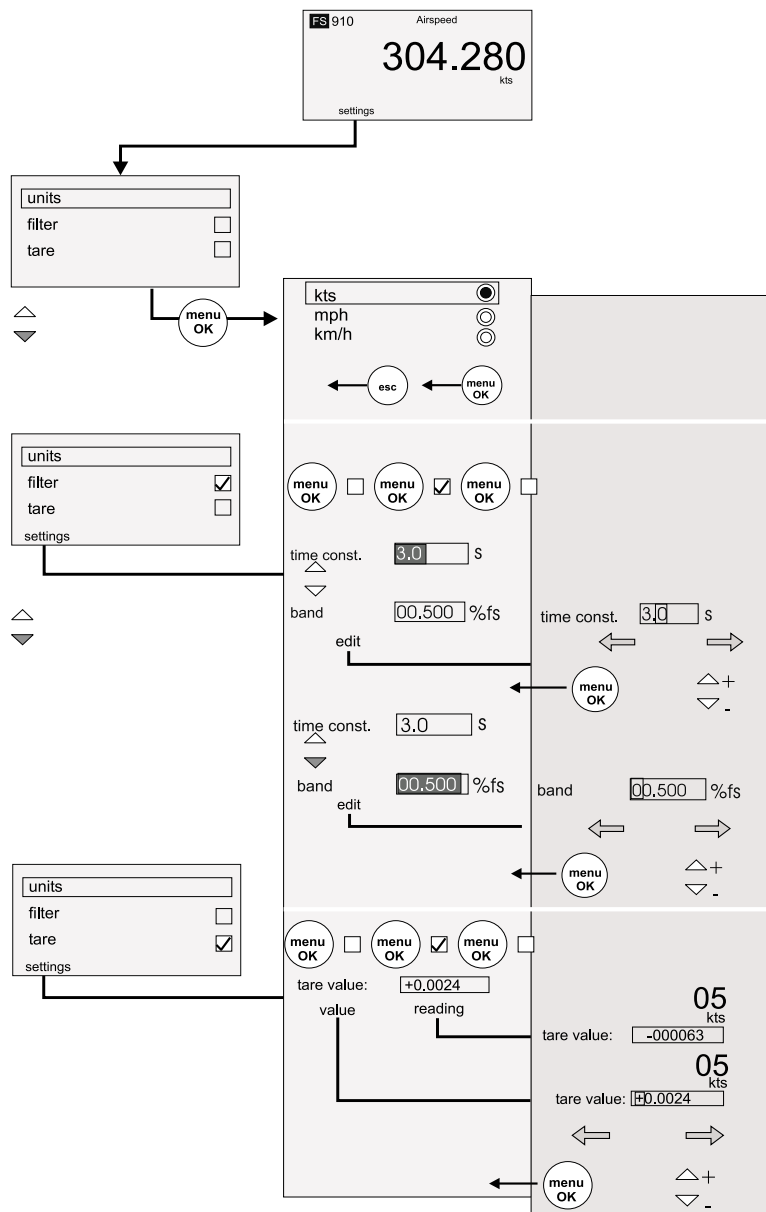


Mach
(must be correctly enabled)

English

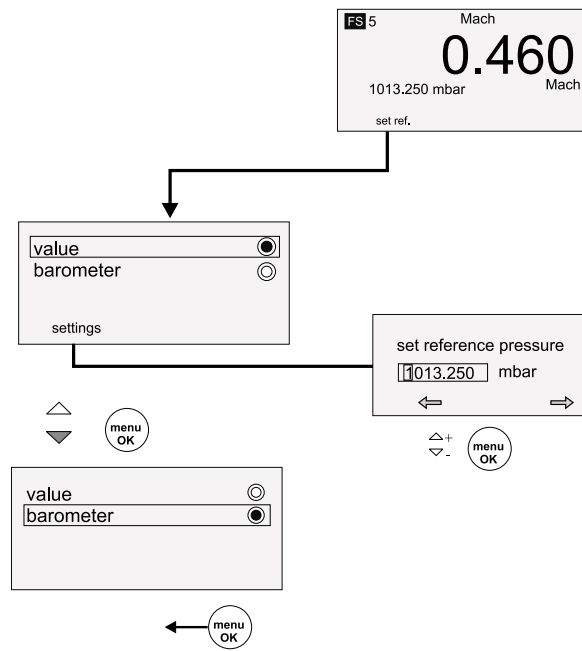


Supervisor Set-up

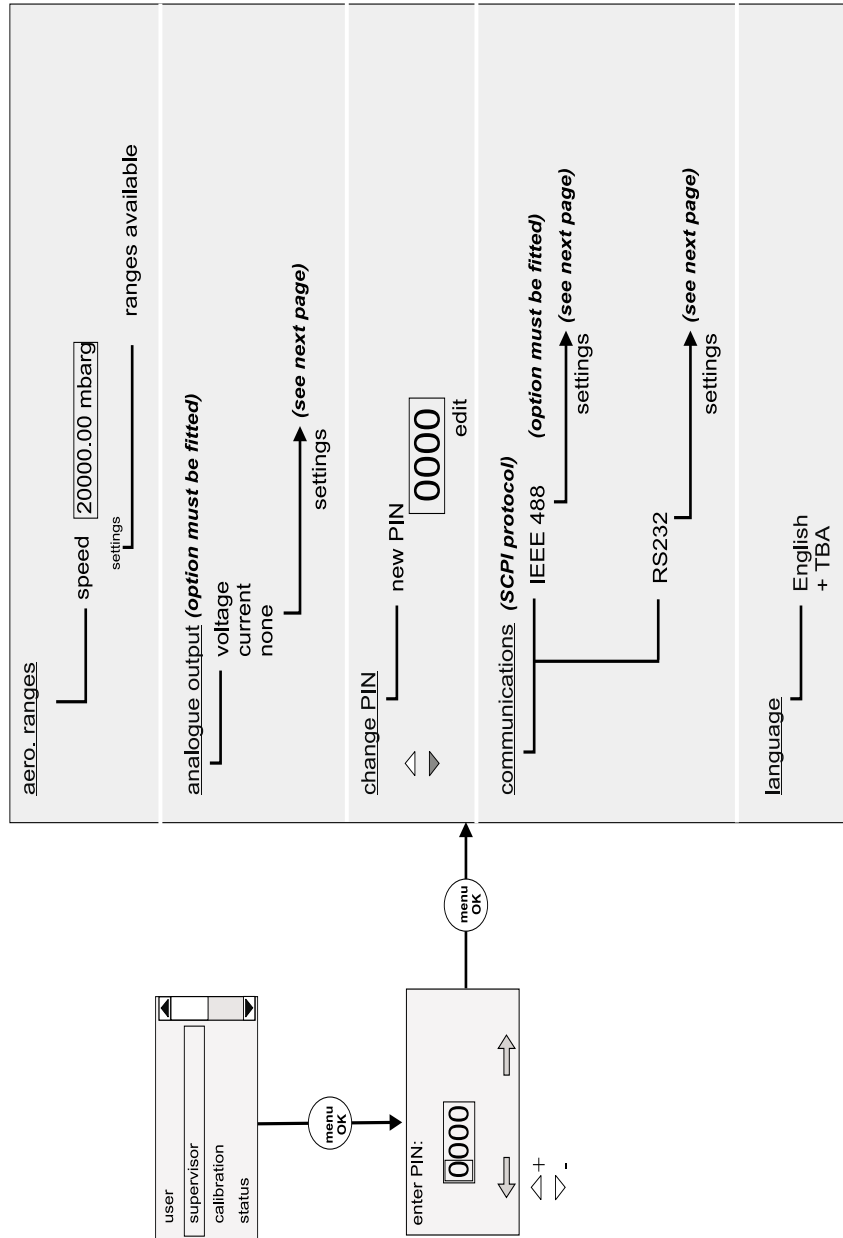

Supervisor set-up (continued)


Communications

English

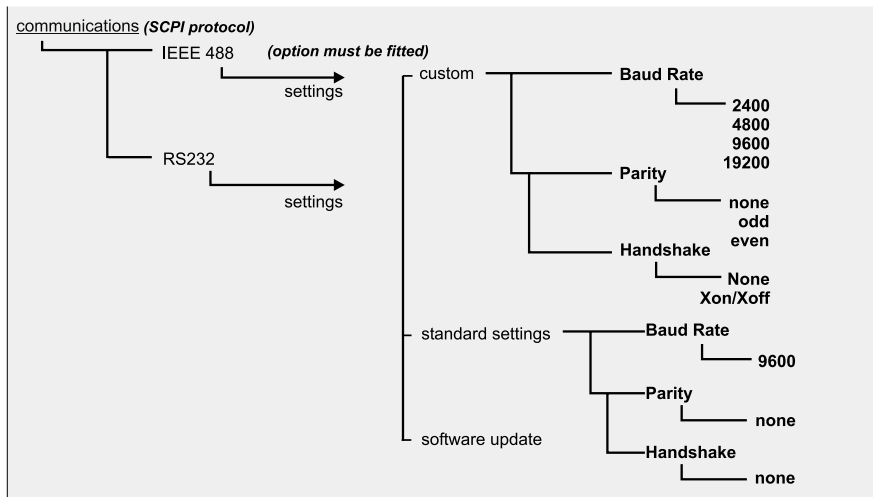







Druck DPI 150 User Manual

Supervisor set-up (continued) Analogue output option

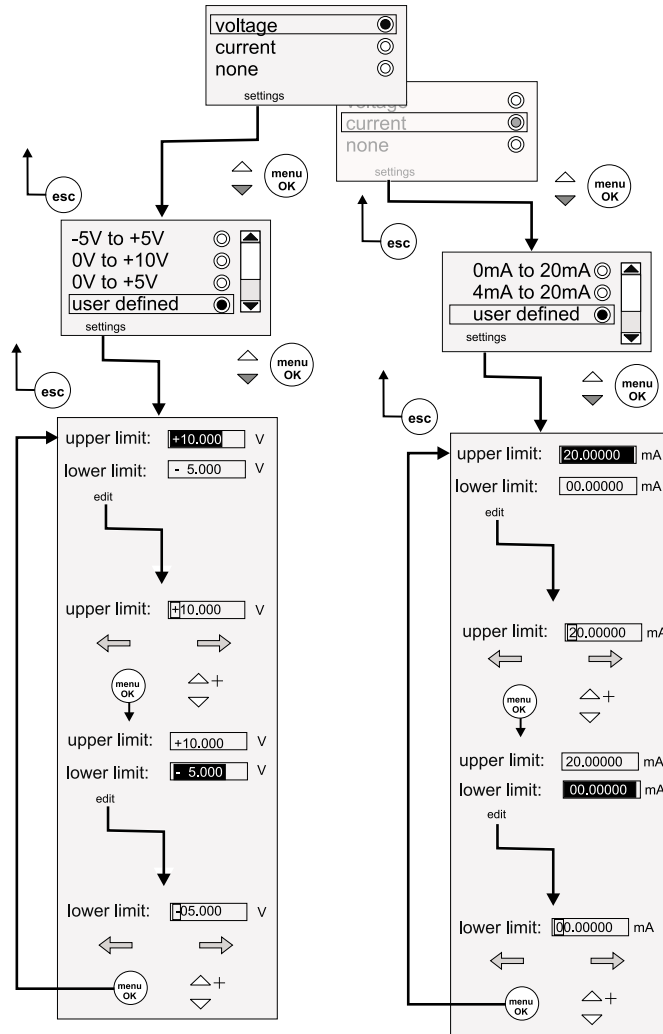

Status

English

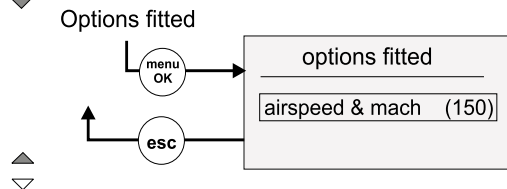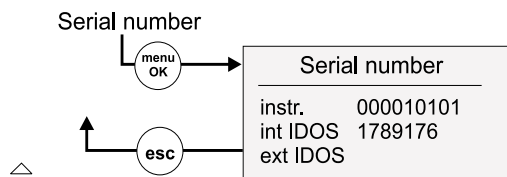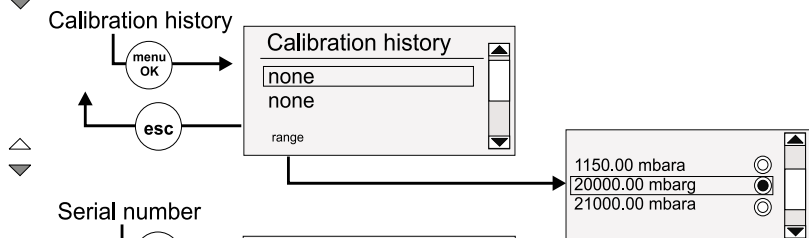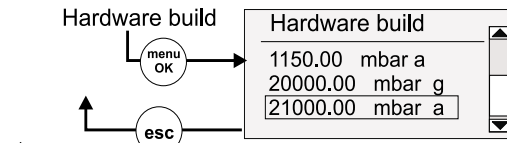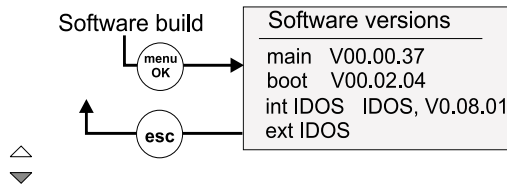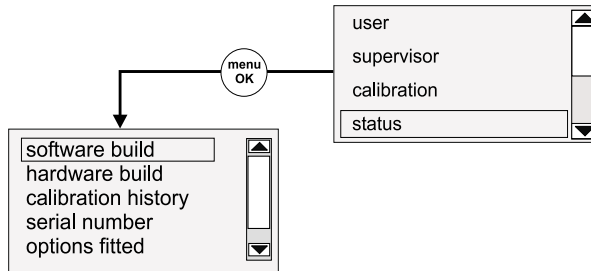

intentionally left blank