

Ashley



Wonderwood

Keeping North America Warm Since 1869

P.O. BOX 151 • SOUTH PITTSBURG, TN 37380
(423) 837-2100

Visit our website at www.usstove.com

King

Hotblast

Longvie

American Harvest

Clayton



1261

SPECIFICATIONS & OPTIONS

- Exempt by the Environmental Protection Agency for low maintenance wood burning.
- Features a lift-top with removable cooking eyes.

Heat Output / Capacity: 24,000 BTUs/hr. / 650 square feet
 Fuel Type: Wood
 Flue Size: 6"
 Floor Required: Non-combustible
 Dimensions: 12" W x 23.25" H x 32.5" L
 Firebox Dimensions: 11" W x 14" H x 25" L
 Clearance: 36" to any combustible wall
 Shipping Weight: 150 lbs.
 Also available in Canadian version C226.



2421

SPECIFICATIONS & OPTIONS

- Exempt by the Environmental Protection Agency for low maintenance wood burning.
- Features removable cooking eyes.

Heat Output / Capacity: 35,000 BTUs/hr. / 900 square feet
 Fuel Type: Wood
 Flue Size: 6"
 Floor Required: Non-combustible
 Dimensions: 16.5" W x 28.75" H x 38" L
 Firebox Dimensions: 16" W x 18.375" H x 31" L
 Clearance: 36" to any combustible wall
 Shipping Weight: 200 lbs.
 Also available in Canadian version C242.



1869

SPECIFICATIONS & OPTIONS

- No electricity required.
- Heavy-duty, cast-iron construction.

Heat Output: 24,000 BTUs/hr.
 Heat Capacity: 650 square feet
 Flue Size: 6"
 Floor Required: Non-combustible
 Fuel Type: Wood/Coal
 Dimensions: 20" W x 22" D x 34" H
 Clearance: 36" to any combustible wall
 Shipping Weight: 216 lbs.



1864

SPECIFICATIONS & OPTIONS

- Cooking eyes.
- Full-sized, functional oven.
- Front and top loading for coal or wood.
- No electricity required.
- Heavy-duty, cast-iron construction.

Fuel Type: Wood/Coal
 Flue Size: 6"
 Floor Required: Non-combustible
 Dimensions: 34" W x 23" D x 32" H
 Clearance: 36" to any combustible wall
 Shipping Weight: 290 lbs.



ASA 7

SPECIFICATIONS & OPTIONS

- Plate steel construction.
- Large ceramic glass fire view and firebrick lining.
- Advanced latch system with coil handle.
- Burns all grades of coal.
- Ash door and full-sized pan standard.
- Cast-iron grates with external shaker handle.

Heat Output / Capacity: 62,300 BTUs/hr. / 1,200 square feet
 Fuel Type: Coal
 Flue Collar Size: 6"
 Dimensions: 22" W x 35.75" H x 24" D
 Door Opening: 17.625" W x 12.375" H
 Clearance to Combustibles: Sides - 32"; Back - 17"
 Shipping Weight: 305 lbs.
 Optional: 120 CFM Blower



1851

SPECIFICATIONS & OPTIONS

Heat Output/Capacity: 30,000 BTUs/hr./1,200 square feet
 Fuel Type: Wood
 Log Length: 16"
 Flue Collar Size: 6"
 Dimensions: 18" H x 27.75" W x 25" D
 Firebox Dimensions: 13.5" H x 17.25" D
 Door Opening: 11.25" W x 10" H
 Door Type: Glass/Cast iron with gasket
 Clearance to Combustibles: Sides - 30"; Rear - 29"
 Shipping Weight: 195 lbs.
 Optional: 100-120F—Thermodisc
 B36—Ultra-quiet crossflow blower



2007

SPECIFICATIONS & OPTIONS

- Firebrick lined.
- EPA exempt.
- Brass handles.
- Glass door.

Heat Output: 37,500 BTUs/hr.
 Heat Capacity: 980 square feet
 Fuel Type: Wood
 Flue Collar: 6"
 Dimensions: 27" W x 27.25" H x 18.5" D.
 Clearance to Combustibles: Sides - 26"; Back - 24"
 Shipping Weight: 250 lbs.
 Optional: B36 Blower—100CFM



NEW! 2009

SPECIFICATIONS & OPTIONS

Heat Output / Capacity: 65,000 BTUs/hr. / 1,800 square feet
 Fuel Type: Wood
 Dimensions: 23.25" W x 30.25" H x 26.5" D
 Log Length: 20"
 Flue Collar Size: 6"
 Firebox Dimensions: 18.25" W x 20.25" H x 20" D
 Door Opening: 15.5" W x 12.25" H
 Clearance to Combustibles: Sides - 12"; Front - 48" Corner - 30"
 Shipping Weight: 343 lbs.
 Optional: 20 FAK—Fresh Air Intake Kit
MOBILE HOME APPROVED!



6037

NEW!

SPECIFICATIONS & OPTIONS

200 CFM—Automatic circulation blower spreads heat evenly.
 Heat Output: 60,000 BTUs/hr.
 Fuel Type: Corn, Pellets
 Hopper Capacity: 70 lbs. (dried corn)
 Flue Collar Size: 3" (pell vent)
 Dimensions: 23.5" W x 33.25" H x 29.5" D
 Door Opening: 19.75" W x 11.675" H
 Clearance to Combustibles: Right Side - 3"; Rear - 3" Left Side - 7"
 Shipping Weight: 309 lbs.
MOBILE HOME APPROVED!



APS 1200

SPECIFICATIONS & OPTIONS

Heat Output: 36,000 BTUs/hr.
 Heat Capacity: 1,200 square feet
 Fuel Type: Wood
 Log Length: 16"
 Flue Pipe Diameter: 6"
 Firebox Volume: 1.5 cubic feet
 Average Emissions: 6.5 grams/hr.
 Efficiency: 73%
 Dimensions: 22.75" W x 22.5" D x 29.75" H
 Clearance to Combustibles: Sides - 16"; Back - 17"
 Shipping Weight: 332 lbs.
 Optional: B36 Blower—100 CFM



APS 1600

SPECIFICATIONS & OPTIONS

Heat Output: 40,000 BTUs/hr.
 Heat Capacity: 1,600 square feet
 Fuel Type: Wood
 Log Length: 18"
 Firebox Volume: 2.5 cubic feet
 Flue Pipe Diameter: 6"
 Average Emissions: 3.3 grams/hr.
 Efficiency: 71%
 Dimensions: 25.125" W x 26.5" D x 32.625" H
 Clearance to Combustibles: Sides - 16"; Back - 15"
 Shipping Weight: 424 lbs.
 Optional: B36 Blower—100 CFM
MOBILE HOME APPROVED!



APS 2000

SPECIFICATIONS & OPTIONS

Heat Output: 60,200 BTUs/hr.
 Heat Capacity: 2,000 square feet
 Fuel Type: Wood
 Log Length: 19"
 Flue Pipe Diameter: 6"
 Firebox Volume: 3.4 cubic feet
 Average Emissions: 3.58 grams/hr.
 Efficiency: 72%
 Dimensions: 28.5" W x 29.25" D x 34.25" H
 Clearance to Combustibles: Sides - 19"; Back - 19"
 Shipping Weight: 538 lbs.
 Optional: B36 Blower—100 CFM



BSK 1000

SPECIFICATIONS & OPTIONS

Construction: Heavy-duty cast-iron for increased durability
 Double Barrel Stove Kit: Increases efficiency by trapping flue gasses, creating greater heat transfer
 Flue Required: 6"
 Floor Required: Non-combustible
 Clearance: 36" to any combustible wall
 Shipping Weight: 27 lbs. (BSK 1000)
 17 lbs. (BKAD 500)
 Shipping Cube: .90 (BSK 1000)
 .08 (BKAD 500)
 Barrel not included.



BKAD 500

SPECIFICATIONS & OPTIONS

Construction: Heavy-duty cast-iron for increased durability
 Double Barrel Stove Kit: Increases efficiency by trapping flue gasses, creating greater heat transfer
 Flue Required: 6"
 Floor Required: Non-combustible
 Clearance: 36" to any combustible wall
 Shipping Weight: 17 lbs. (BKAD 500)
 Shipping Cube: .08 (BKAD 500)
 Barrel not included.



UNITED STATES STOVE COMPANY
 P.O. BOX 151 • SOUTH PITTSBURG, TN 37380 • (423) 837-2100
 Visit our website at www.usstove.com
 Keeping North America Warm Since 1869

CONTACT INFORMATION

Parts Department

Phone: (888) 299-1440

Fax: (423) 837-2129

E-mail: parts@usstove.com

Customer Service

Phone: (800) 750-2723, ext. 3033, 3021

Fax: (423) 837-2109

E-mail: customerservice@usstove.com

Online Support

Website: www.usstove.com

FAQ: Frequently Asked Questions Database

E-mail: customerservice@usstove.com

Sales

Phone: (800) 750-2723

Fax: (423) 837-2109

E-mail: sales@usstove.com

Literature Request

Phone: (800) 750-2723, ext. 4000

Fax: (423) 837-2109

E-mail: literature@usstove.com



UNITED STATES STOVE COMPANY

P.O. BOX 151 • SOUTH PITTSBURG, TN 37380 • (423) 837-2100

Visit our website at www.usstove.com

Keeping North America Warm Since 1869

WOOD/COAL WARM AIR FURNACES



1200G

SPECIFICATIONS & OPTIONS

Heat Output: 110,000 BTUs/hr.
Heat Capacity: 2,200 square feet
Fuel Type: Wood
Log Length: 25"
Flue Collar Size: 6"
Heat Outlet Size: 8" (2)
Dimensions: 40.5" H x 24.5" W x 32.5" L
Clearance to Combustibles: Sides – 12"; Front – 48"
Back – 30"

Shipping Weight: 475 lbs.
Optional: 12RAK Cold Air Return/Filter Box



1300

SPECIFICATIONS & OPTIONS

Heat Output / Capacity: 87,000 BTUs/hr. / 1,200 square feet
Fuel Type: Coal/Wood
Flue Collar Size: 6"
Heat Outlet Size: 8" (2)
Dimensions: 40" H x 21" W x 35" L
Firebox Dimensions: 27" H x 16.5" W x 22.5" L
Firebox Construction: Single front—Full 7 gauge
Firebrick Lining: STANDARD
Clearance to Combustibles: Sides – 12"; Front – 48"
Back – 30"

Clearance to Flue Pipe: Back – 18"; Sides – 21"
Shipping Weight: 375 lbs.
Optional: 11 DIK—Induced Draft Kit with a remote wall thermostat for wood or coal use.
11 RKS—Cold Air Return Enclosure with Filter Box.



1400

SPECIFICATIONS & OPTIONS

Heat Output / Capacity: 114,000 BTUs/hr. / 2,400 square feet
Fuel Type: Wood
Flue Collar Size: 6" Cast-Iron with Gasket
Dimensions: 40" H x 24" W x 42" L
Firebox Dimensions: 27" H x 20" W x 28" L
Firebox Construction: Single front—Full 7 gauge
Clearance to Combustibles: Sides – 12"; Front – 48"
Back – 30"

Clearance to Flue Pipe: Back – 18"
Shipping Weight: 490 lbs.
Optional: 11 DIK—Induced Draft Kit with a remote wall thermostat.
11 RKL—Cold Air Return Enclosure with Filter Box.



1537G

SPECIFICATIONS & OPTIONS

Heat Output / Capacity: 119,000 BTUs/hr. / 2,500 square feet
Fuel Type: Coal/Wood
Flue Collar Size: 6" Cast-Iron with Gasket
Dimensions: 40" H x 24" W x 42" L
Firebox Dimensions: 27" H x 20" W x 28" L
Firebox Construction: Single front—Full 7 gauge
Clearance to Combustibles: Sides – 12"; Front – 48"
Clearance to Flue Pipe Back: 18"

Shipping Weight: 490 lbs.
Optional: 11 DIK—Induced Draft Kit with a remote wall thermostat for wood or coal use.
11 RKL—Cold Air Return Enclosure with Filter Box.



1600G

SPECIFICATIONS & OPTIONS

Heat Output: 135,000 BTUs/hr.
Heat Capacity: 3,000 square feet
Fuel Type: Wood/Coal
Log Length: 28"
Flue Collar Size: 6"
Heat Outlet Size: 13" x 18"
Firebox Dimensions: 48" H x 24" W x 50.5" L
Clearance to Combustibles: Sides – 22"; Front – 48"
Back – 20"

Shipping Weight: 525 lbs.
Optional: C61899—Cold Air Return/Filter Box
C61999—Deluxe Cold Air Return/Filter Box
1124—Hot Water Coil Kit



1800G

SPECIFICATIONS & OPTIONS

Heat Output: 160,000 BTUs/hr.
Heat Capacity: 3,600 square feet
Fuel Type: Wood/Coal
Log Length: 35"
Flue Collar Size: 8"
Heat Outlet Size: 18" x 18"
Firebox Dimensions: 48" H x 26" W x 62" L
Clearance to Combustibles: Sides – 22"; Front – 48"
Back – 20"

Shipping Weight: 770 lbs.
Optional: C61899—Cold Air Return/Filter Box
C61999—Deluxe Cold Air Return/Filter Box
1124—Hot Water Coil Kit



NEW! 22AF

SPECIFICATIONS & OPTIONS

Heat Output: 31,000 to 87,000 BTUs/hr.
Heat Capacity: 1,200 square feet
Fuel Type: Coal/Wood
Log Length: 22"
Flue Collar Size: 6"
Heat Outlet: 8" (2)
Dimensions: 21" W x 40" H x 35" L
Firebox Dimensions: 16.5" W x 27" H x 22.5" L
Clearance to Combustibles: Sides – 12"; Front – 30"
Rear – 30"

Shipping Weight: 375 lbs.
Optional: 11DIK—Induced Draft Kit w/Thermostat
11RKS—Cold Air Return/Filter Box



24AF

SPECIFICATIONS & OPTIONS

Heat Output: 25,100 to 107,000 BTUs/hr.
Heat Capacity: 2,000 square feet
Fuel Type: Coal/Wood
Coal Capacity: 105 lbs.
Log Length: 22"
Flue Collar Size: 6"
Heat Outlet Size: 12"
Dimensions: 23" W x 46" H x 24" L
Clearance to Combustibles: Sides – 12"; Rear – 30"

Shipping Weight: 375 lbs.
Optional: 1124—Hot Water Coil Kit
24CRM—Cold Air Return/Filter Box (medium)


WOOD/COAL STOVES / GAS HEATERS



2827/2941

SPECIFICATIONS & OPTIONS

Heat Output: 48,000 BTUs/hr. (2827); 43,000 BTUs/hr. (2941)
Heat Capacity: 1,200 sq. ft. (2827); 1,100 sq. ft. (2941)
Fuel Type: Coal (2827); Wood (2941)
Coal Capacity: 50 lbs. (2827)
Log Length: 23" (2941)
Flue Size: 6"
Floor Required: Non-combustible
Lining: Firebrick
Dimensions: 33" H x 19" W x 32.5" L (2827)
33.5" H x 32.25" W x 19.25" D (2941)
Clearance: 36" to any combustible rear wall; 24" to side wall
Shipping Weight: 245 lbs. (2827); 237 lbs. (2941)
Optional: F36 Blower—Manual and/or Automatic

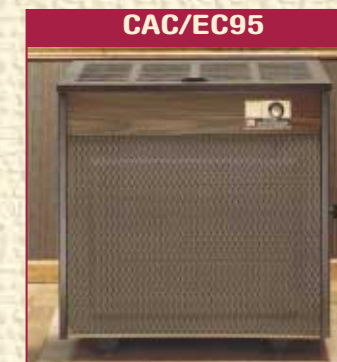

CAC/EC95

SPECIFICATIONS & OPTIONS

Heat Output: 48,000 BTUs/hr. (CAC); 45,000 BTUs/hr. (EC95)
Heat Capacity: 1,200 square feet
Fuel Type: Coal (CAC); Wood (EC95)
Coal Capacity: 70 lbs. (CAC)
Log Length: 24" (EC95)
Flue Collar: 6"
Height to Bottom of Flue Collar: 21.25"
Dimensions: 34" H x 33.5" W x 21.25" D
Firebox Dimensions: 24" H x 12.25" W x 18.875" D
Clearance to Combustibles: Sides – 17"; Rear – 35"
Shipping Weight: 241 lbs.
Optional: KB902—Two-speed Automatic Blower



LONGVIE DV20

SPECIFICATIONS & OPTIONS

- Slim Euro design cabinet with a sturdy cast-aluminum grill.
- Full-width glass viewing area.
- Double firebox construction.

Heat Output: 18,000 BTUs/hr.
Heat Capacity: Up to 550 square feet
Fuel Type: Natural or LP
Dimensions: 26" W x 22.625" H x 6.75" D
Vent Kit: STANDARD
Thermostat: STANDARD
Vent Pipe and Cap: STANDARD
DIRECT VENT!



LONGVIE DV12

SPECIFICATIONS & OPTIONS

- Slim Euro design cabinet with a sturdy cast-aluminum grill.
- Full-width glass viewing area.
- Double firebox construction.

Heat Output: 10,000 BTUs/hr.
Heat Capacity: Up to 330 square feet
Fuel Type: Natural or LP
Dimensions: 15" W x 22.625" H x 6.75" D
Vent Kit: STANDARD
Thermostat: STANDARD
Vent Pipe and Cap: STANDARD
DIRECT VENT!

GAS FIREPLACES/HEATERS



C9947

SPECIFICATIONS & OPTIONS

- Heating efficiency of 99.9%.
- No electricity required.

Heat Output: 39,900 BTUs/hr.
Heat Capacity: 1,200 square feet
Fuel Type: LP or Natural Gas
Dimensions: 28.75" H x 33.5" W x 21" D
Clearance to Combustibles: Right Side – 15"; Left Side – 8"
Back – 4"
Shipping Weight: 103 lbs.
Shipping Cube: 10.25
Optional: WT47—Thermostat Kit
RCK60—Hand-Held Remote



B2045

SPECIFICATIONS & OPTIONS

- Features a 120 CFM Blower to extend heat evenly.
- Heating efficiency of 99.9%.
- No electricity required.

Heat Output: 39,900 BTUs/hr.
Heat Capacity: 1,200 square feet
Fuel Type: LP or Natural Gas
Dimensions: 28" H x 26.75" W x 17" D
Clearance to Combustibles: Side – 8"; Back – 4"
Shipping Weight: 103 lbs.
Shipping Cube: 10.25
Optional: WT47—Thermostat Kit
RCK60—Hand-Held Remote



VF30i

SPECIFICATIONS & OPTIONS

- Realistic looking ceramic fiber logs.
- Piezo "matchless" ignitor with front panel access for ease of operation.
- ODS (Oxygen Depletion Sensor) pilot for safe operation.
- Thermostat controlled for maximum comfort and efficiency.
- Attractive brass highlights and generous viewing screen.
- Controlled by wall-mounted thermostat.

Heat Output / Capacity: 30,000 BTUs/hr. / 750 square feet
Fuel Type: LP or Natural Gas
Heating Efficiency: 99.9%
Dimensions: 32" H x 44" W x 24" D
Firebox Dimensions: 22.5" H x 25" W x 13" D
Shipping Weight: 106 lbs.



B2020

SPECIFICATIONS & OPTIONS

- Easy installation and realistic looking ceramic fiber logs.
- Convenient side door access to the piezo "matchless" ignitor and millivolt control valve.
- ODS (Oxygen Depletion Sensor) pilot for safe operation.
- Attractive brass highlights and generous viewing screen.
- Controlled by wall-mounted thermostat.

Heat Output/Capacity: 14,000–20,000 BTUs/hr. / 420–600 sq.ft.
Fuel Type: LP or Natural Gas
Overall Dimensions: 46.625" W x 39.875" H x 13.875" D
Firebox Dimensions: 23.25" W x 21.5" H x 9.625" D
Shipping Weight: 125 lbs.
Optional: RCK60—Remote Control Kit
WSK60—Wall Switch Kit
B29—Blower
WT47—Thermostat Kit