

**SYSTEM ACCESSORIES
PRODUCT CATALOGUE**






EQUIPMENT FOR THE OPTIMUM STERILE GOODS WORKFLOW

To secure best routines for infection control, high efficiency and an ergonomic workplace, the entire circulation of sterile goods must be considered. That's why Getinge offers not only washer-disinfectors and sterilizers, but complete processing systems with thought-through loading equipment and accessories that might be needed.

Our accessories for pre-cleaning, inspection, packing, storage and distribution provides an efficient and seamless flow of sterile goods, where everything fits together with coherent design and functionality.

Our products are suited for many different applications, such as central sterile supply departments, small clinics and practices, dental clinics, laboratories, endoscopy reprocessing units etc. You'll find more about what accessories fit what applications on the next couple of pages, as well as a register at the back that lists all our available accessories. If you are unable to find the products you're looking for, please contact your local Getinge representative. We can normally assist you with everything you need.

 = Washable

**1 Central Sterile Supply Department:
SOILED ZONE**

**2 Central Sterile Supply Department:
CLEAN ZONE**

**3 Central Sterile Supply Department:
STERILE ZONE**

4 GOODS CARRIERS

5 WATER PRE-TREATMENT

6 DETERGENT ACCESSORIES

7 OPERATION ROOMS

8 ENDOSCOPE REPROCESSING

9 DISINFECTION ROOMS

10 OTHER APPLICATION AREAS

- CLINICS & PRACTICES
- DENTAL CLINICS
- LABORATORIES

1

2

3

4

5

6

7

8


9

10

CSSD: Soiled Zone


Getinge's designs are based on the barrier principle, ensuring clear separation of soiled, clean and sterile zones. The zones are separated by pass-through washer-disinfectors and sterilizers. The following pages will describe what accessories we offer for each of the zones, starting with the soiled zone.

Unclean items from the operating theaters, wards, outpatient and other departments arrive at the reception area – for soiled goods by covered trolleys or by lift – in the same instrument trays, baskets and containers as they were delivered in. After visual inspection, items are either put straight on racks and loaded into the pass-through washer-disinfectors or manually cleaned by soaking, spray-gun rinse and/or ultrasonic cleaning, and then put into the washer-disinfectors.

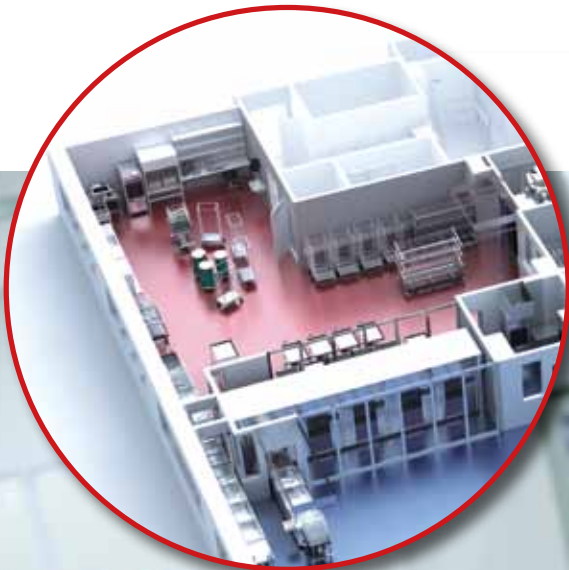



- | | | |
|------------------------------|-------------------|----------------------------|
| 1. Table trolley | 5. Wall shelf | 9. Modular storage cabinet |
| 2. Stainless steel sink unit | 6. Spray gun | |
| 3. Ultrasonic unit | 7. Wall cabinet | |
| 4. Inspection lamp | 8. Basket trolley | |

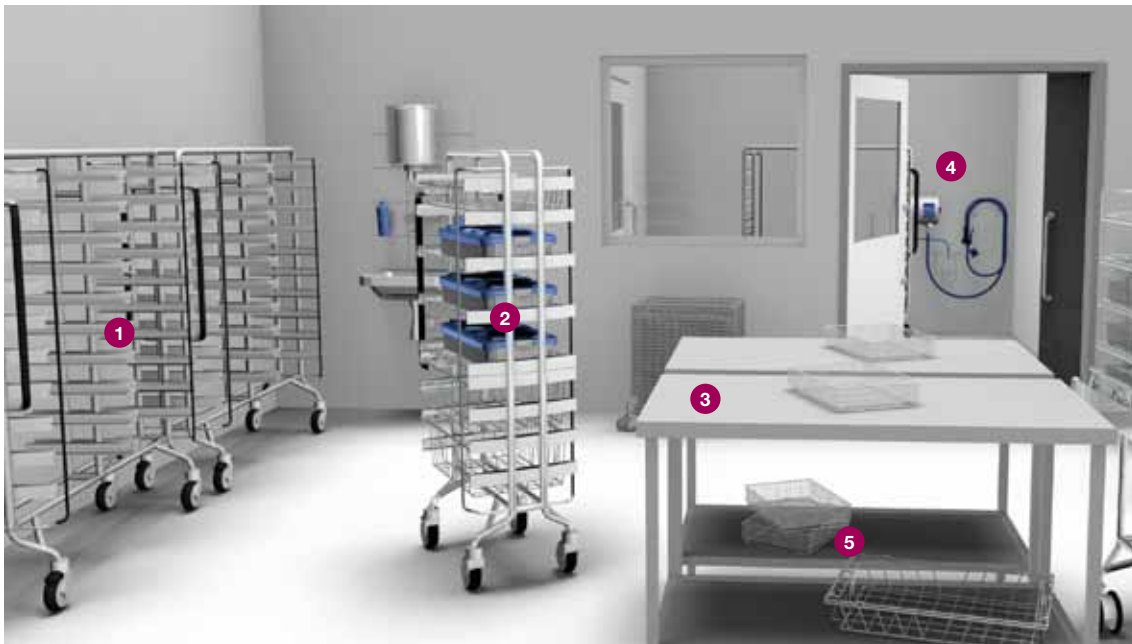

- | | |
|--|------------------------------|
| 1. Getinge SMART open distribution trolley, DTO double | 4. Manual trolley washer |
| 2. Getinge SMART open distribution trolley, DTO single | 5. Various trays and baskets |
| 3. Stainless steel worktable | |

ULTRASONIC CLEANERS

Getinge Ultrasonic is a full range of high-quality, easy-to-use worktop ultrasonic cleaners that include practically every technical feature available. The models in the new series increase the ultrasonic effect further to achieve great results.

The reliable technology, in combination with the materials used, prolong the service life of the units, while the design combines functionality with modern looks.

Main features:

- Intelligent transducers, the generator always checks and optimizes how to get the power into the system in the best way.
- Sweep function guarantees an optimum sound field distribution in the cleaning bath which makes the cleaning effect equally effective in every part of the bath.
- Degas function for highly efficient acceleration of the degassing process in the cleaning liquid, removes gases in the water for optimized cleaning efficiency.
- Lid and optional basket available for all models.



The functional design of our new units fully meets the cleaning demands of even the toughest continuous operation. Should you require other sizes than the ones mentioned below, please contact your Getinge representative.

More information about our products is found in our product specifications and on getinge.com.



GETINGE ULTRASONIC 60 & 100

Ultrasonic cleaning unit with 6- or 10-liter bath capacity, suitable for cleaning a few small instruments, needles or rigid endoscopes. Often used for decentralized cleaning, e.g. outside the CSSD. Equipped with dry-run protected heating to further support the cleaning process. The operator panel shows the set and remaining cleaning times. The preset and actual temperature of liquid is also shown. The unit is micro-processor controlled, with sweep technology for optimum distribution of sound in the cleaning bath. The cleaning tank is made of cavitation-resistant stainless steel. The operator panel is splash-proof. For simple and effective draining of liquid from the tank, just turn a knob.

A lid is included for protection as well as noise reduction.

Model	Tank size (WxDxH), mm	Unit size (LxWxH), mm	Tank capacity, L	Weight, kg	Power consumption, W	Mains voltage, V
Getinge Ultrasonic 60	300x151x150	365x186x264	6	5.1	550	220-240
Getinge Ultrasonic 100	300x240x150	365x278x264	10	5.9	550	220-240



No	Art. no.	For model	Accessory
1	6003000075	Getinge Ultrasonic 60	Wire basket
1	6003000079	Getinge Ultrasonic 100	Wire basket
2	6003000097	Getinge Ultrasonic 60	Beaker 600 ml
3	6003000098	Getinge Ultrasonic 60	Holder for two beakers + two rubber rings



GETINGE ULTRASONIC 150

Ultrasonic cleaning unit with 14-liter bath capacity, ideal for cleaning medical norm tray baskets. The operator panel shows the set and the remaining cleaning times. The ultrasonic cleaning process is microprocessor-controlled, with sweep technology for optimum distribution of sound in the cleaning bath. The cleaning tank is made of cavitation-resistant stainless steel and the operator panel is splash-proof. For simple and effective draining of liquid from the tank, just turn a knob. A stainless steel lid is included for protection as well as noise reduction.

Note: This is only of the Geringe Ultrasonic model that is not available in a heated version.



Tank size (WxDxH), mm	Unit size (LxWxH), mm	Tank capacity, L	Weight, kg	Power consump., W	Mains voltage, V
505x300x100	568x340x224	14	10	300	220-240
Art. no.		Description			
6003000080		Geringe Ultrasonic 150			
6003000081		Geringe Ultrasonic 150, 120 V-60 Hz			
6003000083		Wire basket for Geringe Ultrasonic 150			



GETINGE ULTRASONIC 180

Ultrasonic cleaning unit with 18-liter bath capacity, suitable for cleaning flexible endoscope accessories. Equipped with dry-run-protected heating to further support the cleaning process. The operator panel shows the set and the remaining cleaning times. The ultrasonic cleaning process is microprocessor-controlled, with sweep technology for optimum distribution of sound in the cleaning bath. The cleaning tank is made of cavitation-resistant stainless steel and the operator panel is splash-proof. For simple and effective draining of liquid from the tank, just turn a knob. A stainless steel lid is included for protection as well as noise reduction.



Tank size (WxDxH), mm	Unit size (LxWxH), mm	Tank capacity, L	Weight, kg	Power consump., W	Mains voltage, V
327x300x200	390x340x321	18	8.5	1000	220-240
Art. no.		Description			
6003000084		Geringe Ultrasonic 180			
6003000085		Geringe Ultrasonic 180, 120 V-60 Hz			
6003000087		Wire basket for Geringe Ultrasonic 180			



GETINGE ULTRASONIC 300

Ultrasonic cleaning unit with 28-liter bath capacity, for cleaning up to 3 medical-norm tray baskets. Equipped with dry-run-protected heating to further support the cleaning process. The operator panel shows the set and the remaining cleaning times. The ultrasonic cleaning process is microprocessor-controlled, with sweep technology for optimum distribution of sound in the cleaning bath. The cleaning tank is made of cavitation-resistant stainless steel and the operator panel is splash-proof. For simple and effective draining of liquid from the tank, just turn a knob. A stainless steel lid is included for protection as well as noise reduction.



Tank size (WxDxH), mm	Unit size (LxWxH), mm	Tank capacity, L	Weight, kg	Power consump., W	Mains voltage, V
505x300x200	568x340x321	28	11	1500	220-240
Art. no.		Description			
6003000088		Geringe Ultrasonic 300			
6003000089		Geringe Ultrasonic 300, 120 V-60 Hz			
6003000091		Wire basket for Geringe Ultrasonic 300			



WALL SHELF

A storage unit designed for wall mounting above worktables or sinks in heavy-duty work areas. The wall shelf unit consists of solid shelves, and wall rails with brackets that are all made of polished stainless steel. The fully adjustable brackets make it possible to adjust the shelf spacing for optimum storage space. 4793817-16 is designed to hold the ultrasonic unit.

Art. no.	Size (W x H x D), mm	Brackets	Shelves
479381700	600 x 600 x 300	2	2
479381701	800 x 600 x 300	2	2
479381702	1000 x 600 x 300	2	2
479381703	1200 x 600 x 300	2	2
479381704	1600 x 600 x 300	3	2
479381705	2000 x 600 x 300	3	2
479381706	2400 x 600 x 300	4	2
479381707	2800 x 600 x 300	4	2
479381716	600 x 600 x 500	2	1



WALL CABINET

These cabinets are available in single- and double-door versions. Doors are either solid stainless steel or with an integrated window. Both door types have double walls with filling between the plates, making them stable and impact-resistant. The wall cabinet is made of stainless steel with a ground and polished finish. The wall cabinet includes one interior stainless steel shelf. The cabinet can be equipped with optional lock and key.

Single-door		Overall size (W x H x D), mm	Left-hinged	Right-hinged
Steel door	Glass door			
561621070	561621072	400 x 700 x 375	x	
561621071	561621073	400 x 700 x 375		x
561621074	561621076	500 x 700 x 375	x	
561621075	561621077	500 x 700 x 375		x
561621078	561621080	600 x 700 x 375	x	
561621079	561621081	600 x 700 x 375		x
Double-door		Overall size (W x H x D), mm		
Steel door	Glass door			
561621082	–	500 x 700 x 375		
561621083	561621084	600 x 700 x 375		
561621085	561621086	800 x 700 x 375		
Option		Art. no.		
Lock and key		561621001		



MANUAL TROLLEY WASHER

Time-saving, hygienic manual trolley washer with wall-mounted spray-gun unit, including holder for detergents. Connection to hot water (max 70°C) with 1/2" tubing or reinforced rubber hose. Equipped with adjustable spraying nozzle and 15 m tube. Works on normal water pressure. Cleaning agent is automatically injected into the water flow.

Art. no.	Description	Hose, m	Water connection	Weight, kg
478727501	Manual trolley washer	15	1/2"	6.5



V90P



V90



V94P



V94

STAINLESS STEEL SINK UNIT

These sink / worktop units are designed for heavy-duty work, such as sorting, manual washing and preparation, particularly with wet goods. The robust stainless steel worktop has raised edges all around to contain water splashing. The working height is 900 mm and the worktop is 650 mm deep as standard. Different models are available to meet specific requirements, including one unit with the raised edges but without a sink.

To describe the preferred sink unit select:

Length: Units with integrated sink 1200-2800 mm and 600-2800 mm for worktops without sink.

Arrangement: Stainless steel floor stand or brackets for wall mounting.

With or without shelf: the sink/worktop unit can be delivered with an integrated shelf for close-at-hand storage.

With or without sink: 3 models. Single or double sinks for placement to left, right or middle on the worktop. All sinks have a smooth, polished finish with sizes that allow processing even of large modular instrument trays.

The sink/worktop unit includes a drain valve, removable strainer, overflow drainpipe and water trap. The unit is delivered ready for assembly. Mixing faucets are ordered separately.

Other features are available on request. Ask your local Getinge representative for full details and dimensions.

Sink model	Sink dimensions (L x W x D) mm	Length mm	Arrangement (as per pictures)				Sink Placement		
			V90	V90P	V94	V94P	Left	Middle	Right
BE50	500 x 400 x 200	1200-2800	•	•	•	•	•	•	•
BD50	1020 x 400 x 200	1600-2800	•	•	•	•	•	•	•
BE70	700 x 440 x 240	1200-2800	•	•	•	•	•	•	•
No Sink	–	600-2800	•	•	•	•	–	–	–



1



2



3

FAUCETS

Both Temp Standard and our Temp Duo Sensor are equipped with the award-winning ESS (Energy Saving System), which can cut your hot water consumption by about 30%.

1. Temp Standard
Manually operated

2. Temp Duo Sensor
Sensor-controlled faucet for short rinsing. Water temperature and rinsing time are preset. Battery operation 6 V (AA)
Batteries are not included

3. Duo Rinse
With rinse shower and self-closing hand shower. Rinse shower for easy pre-cleaning, 1300 mm high-pressure hose, equalizer spring and brackets.
Total height 1000 mm

Art. no.	Description	Material	Mounting, mm
561930201	Standard	Chrome	Hole in worktop Ø 29-37
561930301	Duo Sensor	Chrome	Hole in worktop Ø 29-37
561930401	Duo Rinse	Chrome	Wall-mounted, 160 c/c



WORKTABLE FOR WET GOODS

Worktables designed specially for work with inspection/sorting in heavy-duty areas. Tabletop and floor stand are made of stainless steel. Optional stainless steel lower shelf, serving as easy access storage. Select version with adjustable feet, or with wheels for a mobile workstation.

Table with adjustable feet		Table with wheels	Size (LxWxH), mm
No shelf	Lower shelf		
479344008	—	561945301	600 x 650 x 900
479344010	479344001	561945303	800 x 650 x 900
479344011	479344002	561945305	1000 x 650 x 900
479344012	479344003	561945307	1200 x 650 x 900
479344013	479344004	561945311	1600 x 650 x 900
561642401	561642470	561945312	1700 x 650 x 900
561642402	561642471	561945313	1800 x 650 x 900
561642403	561642472	561945314	1900 x 650 x 900
479344014	479344005	561945315	2000 x 650 x 900
561642404	561642473	561945316	2100 x 650 x 900
561642405	561642474	561945317	2200 x 650 x 900
561642406	561642475	561945318	2300 x 650 x 900
479344015	479344006	561945319	2400 x 650 x 900
561642407	561642476	561945320	2500 x 650 x 900
561642408	561642477	561945321	2600 x 650 x 900
561642409	561642478	561945322	2700 x 650 x 900
479344016	479344007	561945323	2800 x 650 x 900



ULTRASONIC CABINET

Double-door cabinet for storing of ultrasonic units up to 18 liters (art.no. 5601690-01/02/03), for fitting on a Getinge stainless steel worktable to give more free worktop space. The ultrasonic unit is placed on a stainless steel shelf that can be pulled out 560 mm for greater access, or retracted for practical out-of-sight storage.

Art. no.	Description	External size (W x D x H), mm	Max load, kg
561673800	Ultrasonic cabinet	730 x 620 x 550	40



BENCH CABINET

A range of stainless steel cabinets for protected storage. Cabinets are available in several widths and in single- or double-door versions. The cabinet door has a smooth yet robust design with soft closing function. Each cabinet is equipped with one interior removable shelf. The cabinet is designed for mounting under the work surface of a sink/worktop unit. Includes door handles. Ask your local Getinge representative for full details and dimensions.

Cabinet width, mm	Left-hinged door	Right-hinged door	Pair of doors	Size (WxDxH), mm
400	561641576	561641577	—	400 x 575 x 515
500	561641578	561641579	—	500 x 575 x 515
600	561641586	561641587	561641588	600 x 575 x 515
800	—	—	561641589	800 x 575 x 515



SPRAY GUN RINSER

This powerful, multi-purpose Selecta spray gun rinser is an extremely useful instrument rinser wherever effective rinsing is a must. For use with water or compressed air. All tips are easily locked to the spray gun by a safety cone. The gun grip is heat-insulated. The water/air pressure is released, regulated and fully controlled by the spray-gun trigger. Delivered with a set of 8 nozzles and a wall-mounted rack for storage of nozzles within easy reach.

Art. no.	Description	Nozzles	Rack
470259001	Spray gun rinser	8 included	Included
470259003	Gun with hose	–	–

Did you know ...

... that Getinge also offers Getinge Clean Sink Dosing (CSD), a multi-use, easy-to-operate detergent dosing system for better process control of manual sink cleaning applications? Getinge CSD can also be used to dispense detergents to ultrasonic baths.



CSSD: Clean Zone

On leaving the washer-disinfector, the clean (but not sterile) goods enter the area for sorting, inspection and packing. For these tasks, Getinge has a full range of practical and easy-to-use equipment that can be adapted to suit different requirements and capacities. Mobility, efficiency and ergonomics are features that reflect the accessories in this area. Once sorted, inspected and packaged, the goods are placed in pass-through sterilizers.





- | | |
|------------------------------------|--------------------|
| 1. Table trolley | 5. Inspection lamp |
| 2. Paper-dispensing trolley | 6. Basket trolley |
| 3. Wire storage shelf | 7. Wire basket |
| 4. Height-adjustable packing table | |



- | | |
|--------------------|----------------------------|
| 1. Storage trolley | 5. Worktable for dry goods |
| 2. Wire shelf | 6. Cutting device |
| 3. Work chair | 7. Modular storage cabinet |
| 4. Rotary sealer | |

2

3

4

5

6

7

8

9

10

SEALERS

Getinge's sealers for sterile packaging offer lots of attractive features. From the simplest, easiest model to our high-performance sealers (integrated with traceability systems and include printers), we have the right sealers to fit your needs and applications.



IMPULSE SEALER GS 100

Compact microprocessor-controlled impulse heat sealer for safe sealing of sterilization pouches. Automatically adjustable temperature. Easy to use and ideal for small clinics. Voltage: 210-240V

Art. no.	Description	Seam width, mm	Size (LxWxH), mm	Weight, kg
561581901	GS 100	10	410 x 300 x 165	6




IMPULSE SEALER GS 200

Compact microprocessor-controlled impulse heat sealer for safe sealing of sterilization pouches. Automatically adjustable temperature. Equipped with a roll-support and cutting device. Easy to use and ideal for small clinics. Voltage: 210-240V

Art. no.	Description	Seam width, mm	Size (LxWxH), mm	Weight, kg
561560901	GS 200	10	410 x 300 x 165	6



GS 54

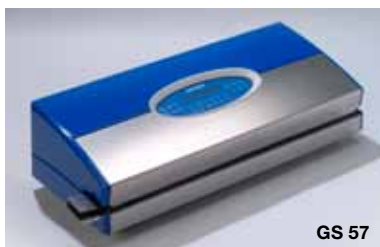

GS 57



ROTARY SEALERS GS 54 & GS 57

GS 54

Microprocessor-controlled automatic heat sealer for sterilization bags and pouches. Validated sealing function with adjustable temperature (50–200°C) and short heat-up time. Speed: Approx. 10 m/min. Touch panel with integrated display. Easy to clean.

GS 57

Fully automatic heat sealers with energy-saving function and other useful features. Hygienic touch panel with integrated display. User-friendly with choice of multiple languages and preset temperatures. Temperature is adjustable 50–200°C. The sealer is microprocessor-controlled and has PC connection. Can also be integrated with documentation system. These sealers are available in versions with one or two integrated printers for printing out texts, batch codes and personal codes on sterilization bags/pouches. Also available in versions with pressure control.

Art. no.	Description	Size (LxWxH), mm
570355101	GS 54	510 x 280 x 215
570355301	GS 57 1D, one printer	665 x 280 x 215
570355401	GS 57 2D, two printers	665 x 280 x 215
570355501	GS 57 1DK, one printer and pressure control	665 x 280 x 215
570355601	GS 57 2DK, two printers and pressure control	665 x 280 x 215
570355701	Packing table for GS 54	600 x 220 x 17
570355702	Packing table for GS57	750 x 220 x 17
570355704	UK sealer cord	–
570355705	US sealer cord	–



SEALER SERVICE KIT

Set for validating the performance of sealers GS 54 and GS 57.

The set is delivered complete in a case, including:

- strength adjustment and measuring tool
- speed control unit
- temperature control unit
- temperature sensors
- set of small tools
- service manual & CD

Art. no.	Size (LxWxH), mm
4410142	460 x 155 x 355



STRENGTH TEST DEVICE

Device for testing the sealer seam. The set is delivered complete in a case, including:

- mechanical part for strength test device
- strength measuring unit Chattillon
- service manual & CD-ROM

Art. no.	Size (LxWxH), mm
4410217	460 x 155 x 355



LABEL PRINTER FOR GS 57

This versatile, easy-to-use thermal transfer label printer is designed to be connected with Getinge GS 57 sealers to simplify production of barcode labels. Automatic number generation.

Voltage: 210-240V

Art. no.	Description	Size (LxWxH), mm
4408094	GS 57 label printer	257 x 230 x 167



TAPE DISPENSER

This dispenser for sterilizer tape holds two reels of tape. The heavy-duty bottom plate, fitted with anti-slip rubber, prevents the dispenser from slipping when tape is torn off. Made of high quality coated steel for long use.

Art. no.	Size (LxWxH), mm
561570701	260 x 60 x 120



PAPER-DISPENSING TROLLEY

Movable trolley, for storing of 4 different sizes of sterilizing wrapping paper sheets at the packing stations. The trolley is made of stainless steel tubes and is equipped with

4 pivoting ball bearing rubber wheels, two of which are equipped with brakes.

Art. no.	Size (LxWxH), mm
4402087	1350 x 600 x 845

2

3

4

5

6

7

8

9

10



INSPECTION & PACKING TABLE

These tables are specially designed for sorting, inspection, functional control and packing of various sets for wards, clinics etc, and for surgical instrument sets in trays. The work can be done comfortably, either sitting or standing. The worktop is made of high-pressure (HP) core material in a soft beige color that reduces glare. The table is available as a single or double workplace. A two-shelf console mounted on the worktop is included for storage of packaging materials. The table can be equipped with an optional stainless steel drawer mounted under the worktop. Each drawer unit is 400 mm wide and includes a drawer and a sliding plate.

Frame		Description	Size (LxWxH) mm	Shelf width, mm	
Stainless steel	Powder-coated			upper	lower
479293262	479293263	Single workplace	1600 x 700 x 900	300	350
479293270	479293271	Single workplace	2000 x 700 x 900	300	350
Art. no.		Description			
560377501		230V/50Hz			
567561870		Drawer unit, Stainless steel, size 500 x 400 mm			



HEIGHT-ADJUSTABLE PACKING TABLE

Specially designed tables for sorting, checking and packaging of various instruments, sets etc. The height-adjustable stand enhances ergonomics, hence reducing the risk of injury due to strain. The tabletop is available in either high-pressure (HP) core material or stainless steel. In both versions, the framework and stand are made of stainless steel. The height is adjustable between 755 and 1255 mm and the speed is 40 mm/sec. Max load is 100 kg. Voltage: 230V/50 Hz



Tabletop, HP core material		Tabletop, stainless steel		Size (L x W) mm
without shelves	with shelves	without shelves	with shelves	
561736501	561736521	561736551	561736561	1200 x 800
561736502	561736522	561736552	561736562	1400 x 800
561736503	561736523	561736553	561736563	1600 x 800
561736504	561736524	561736554	561736564	1800 x 800
561736505	561736525	561736555	561736565	2000 x 800
Art. no.		Description		
567561870		Drawer unit, stainless steel, size 500 x 400 mm		
560377501		Lamp 230V/50Hz (for tables with shelves)		
561949201		Set of 4 galvanized wheels		



WORKTABLE FOR DRY GOODS

Worktables specially designed for work with dry goods. The tabletop is made of plastic laminate in a soft beige color that reduces glare. The floor stand is made of either stainless steel or powder-coated steel.

Stainless steel frame	Powder-coated frame	Size (LxWxH), mm
479988012	479988002	1200 x 650 x 900
479988013	479988003	1600 x 650 x 900
479988014	479988004	2000 x 650 x 900
479988015	479988005	2400 x 650 x 900
479988016	479988006	2800 x 650 x 900



LINEN INSPECTION & FOLDING TABLE

Table for inspection and folding of linen. The tabletop is made of a high-pressure (HP) core material in a soft beige color and is equipped with a plastic illuminated inspection panel. The extended width allows comfortable work with large dressing sheets. Work can be carried out comfortably either standing or sitting. The table is available with a frame made of either stainless steel or powder-coated steel. 230 V/ 50 Hz.

Stainless steel frame	Powder-coated frame	Size (LxWxH), mm
478638370	478638371	2000 x 1200 x 900



INSPECTION LAMP

High quality magnifying lamps, suitable for inspecting delicate instruments. The fully adjustable arm enables the user to adjust the magnifying lens to any preferred angle. Delivered with a clamp for affixing to the table. A cover is included for the magnifying lens to protect from dust and to prevent it from inadvertently acting as a burning-glass. Two models are available:

Magnifying lamp, Deluxe flicker-free for longer work with optimal comfort. 190 mm viewing field with standard +3-diopter glass lens that magnifies 1.75 times. 2x13 W energy-saving tubes. Two independent switches allow even light or can create shadows.

Magnifying lamp, Standard has a circular 22 W energy-saving lamp that surrounds the magnifying lens. This provides effective lighting without annoying heat. The viewing field is 127 mm

Inspection lamp with EUR plug	Inspection lamp with UK 3-pin plug	Description	Voltage
561952701	561952702	Magnifying lamp, Deluxe	220-240 V / 50-60 Hz
561952601	561952602	Magnifying lamp, Standard	220-240 V / 50-60 Hz



ADJUSTABLE CHAIR

Ergonomical chairs, available in Standard and Special models. The seat and backrest of the Standard model are upholstered with black, easy-to-clean vinyl. The Special model is upholstered with an easy-to-clean fabric that "breathes". On both models, the backrest and seat are adjustable in height and depth. The adjustment controls are located on the right-hand side of the seat. A footrest made of durable black polyamide is mounted on the gas-filled stem. Other surfaces are coated with non-porous black lacquer that provides good chemical resistance and hardness.

The chair is delivered with castors for hard floors.

Art. no.	Description	Height adjustment, mm
560192201	Adjustable chair, Standard	580-835
561528701	Adjustable chair, Special	570-820



CUTTING DEVICE

These roll dispensers can be used for both storage and cutting of clear-view packaging materials on rolls with a maximum diameter of approx. 220 mm. They are available in three different lengths, for wall or tabletop use. The sliding-action knife is completely built into the housing to prevent injury. Extra knives are available as spare parts.

Art. no.	Description	Size (LxWxH), mm
560171401	Roll dispenser, GS 900	900 x 330 x 170
560171501	Roll dispenser, GS 1200	1200 x 330 x 170
560171601	Roll dispenser, GS 1500	1500 x 330 x 170
564709970	Brackets for wall mounting	70 x 30 x 20
4425040	Extra knife	



STEREO MAGNIFIERS

Our range of magnifiers includes the Stereo Viewer and Stereo Microscope, both with eyepiece-free technology for high-resolution viewing. Both offer superb 3D imaging, and are highly suitable for the inspection of delicate items at the CSSD or other smaller sterile units. The eyepiece-free viewing, together with the fully adjustable stand, allows unparalleled levels of user comfort, reducing operator fatigue.

Stereo Microscope – a highly ergonomical stereo microscope for intricate tasks requiring high-resolution stereo viewing, featuring:

- Patented Dynascope technology, which expands the exit pupil, thus allowing a longer working distance, head freedom and eye relief for excellent ergonomics and superb hand-to-eye coordination.
- Simple 3-D viewing, with the apparent distance to the viewed object identical to the real distance, i.e. no re-focussing and less eye fatigue.
- Flexible balancing arm, making it easy to move and find the right position.
- High-resolution image, thanks to x4.2–x28 stereo zoom magnification range with stepless adjustment
- True color from long-life 14-point LED illuminator providing over 10,000 hours of shadow-free viewing.

Image capture and storage - digital video camera designed for instant digital image capture, together with software package for image storage in BMP, JPG & PNG format.

Enables documentation for analysis or archiving

Art. no.	Description	Voltage
561961501	Stereo microscope	110-240 V / 50-60 Hz
561961502	Unicam for Stereo Microscope	
561961503	Software	



Stereo Viewer – a high-performance stereo viewer for a wide range of precision and inspection tasks requiring magnification and hand-to-eye coordination. The patented optical technology allows operators freedom of head movement, and thus superb ergonomics, large field of view, long working distance and head tilt capability.

- x4–x10 magnification options with quick-change turret. x4 magnification included in delivery, x10 optional.
- True color, LED illumination providing over 10,000 hours of shadow-free viewing
- Large field of view for easy sample manipulation and rework
- Flexible swing arm with small footprint
- Delivery includes head, universal stand with dust cover, lens with x4 magnification, multi-plug

Art. no.	Description	Voltage
561961001	Stereo Viewer	110-240 V / 50-60 Hz
561961203	Lens x10 magnification	

Did you know ...

... that Getinge T-DOC handles all aspects of instrument management, giving you a real-time overview of all your instruments and related supplies, and allowing you to optimize investments and assure the overall high quality level of your hospital operations?



2

3

4

5

6

7

8


9

10

CSSD: Sterile Zone

On completion of the sterilization process, the sterilizers are unloaded with Getinge's ergonomic, user-friendly equipment. The goods are then further transported to sterile storage or directly to the point of use. Whatever the type of goods carrier and transport, Getinge has the right equipment. All of these products will be found in the next chapter.



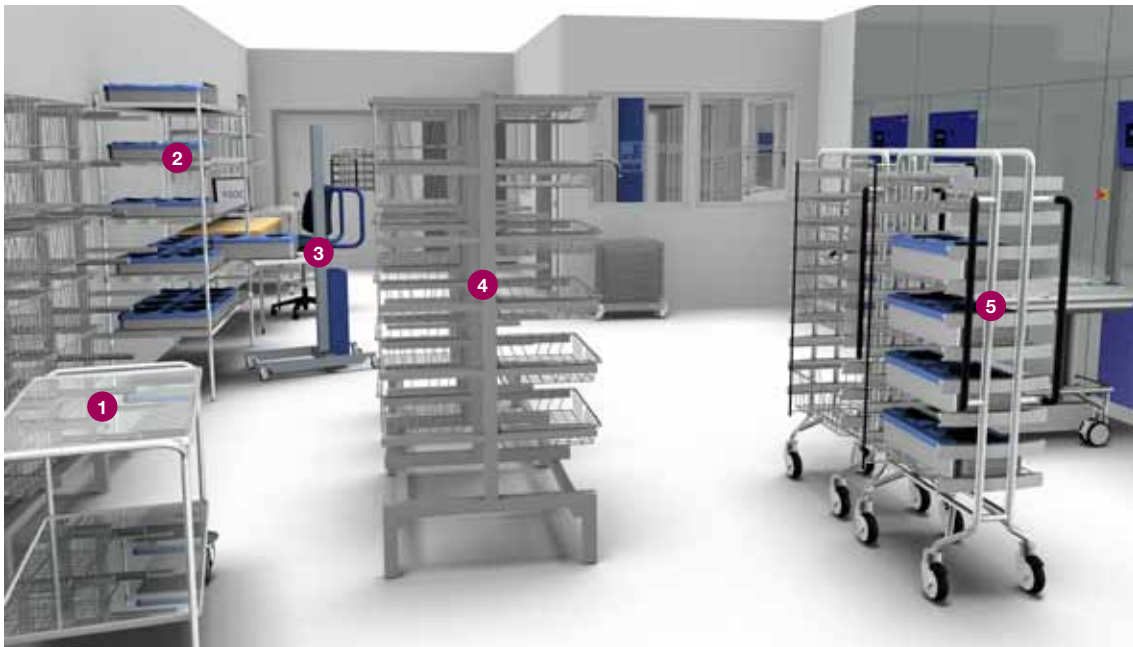

1. Table trolley
2. Wire storage shelf
3. Lift trolley

4. Basket rack, double
5. Getinge SMART open distribution trolley, DTO single

3

4

5

6

7

8

9

10



BASKET RACK

SPRI

Single or double basket racks for Getinge's SPRI modular wire baskets in sterile storage and/or for pre-storage of clean packed goods. The rack is designed as an open unit to promote aeration of sterilized goods and to make inspection of stored goods as easy as possible. Baskets are loaded and unloaded by conveniently sliding them on rigid, horizontal guide-rails, consisting of 50 x 20 mm steel profiles. The single rack is a free-standing section that holds 7 baskets. The double rack consists of two single sections back to back, i.e. holding 14 baskets.

Single rack

Art. no.	Sections	Size (H x D x L), mm
470467270	1 x 7	1775 x 425 x 650
470467271	2 x 7	1775 x 425 x 1245
470467272	3 x 7	1775 x 425 x 1840
470467273	4 x 7	1775 x 425 x 2440
470467274	5 x 7	1775 x 425 x 3035
470467275	6 x 7	1775 x 425 x 3630
470467276	7 x 7	1775 x 425 x 4230
470467277	8 x 7	1775 x 425 x 4826
470467278	9 x 7	1775 x 425 x 5423
470467279	10 x 7	1775 x 425 x 6020



Double rack

Art. no.	Sections	Size (H x D x L), mm
470467370	1 x 2 x 7	1775 x 800 x 650
470467371	2 x 2 x 7	1775 x 800 x 1245
470467372	3 x 2 x 7	1775 x 800 x 1840
470467373	4 x 2 x 7	1775 x 800 x 2440
470467374	5 x 2 x 7	1775 x 800 x 3035
470467375	6 x 2 x 7	1775 x 800 x 3630



WIRE STORAGE SHELF

Modular-built, free-standing shelf unit for storage of clean linen, instruments, packing material or sterilized goods, including disposables. Each unit has five shelves that are designed as a wire construction, allowing good air circulation and at the same time permitting easy inspection of the goods. The wire shelves are made of special steel, chromium-plated and surface-treated with clear epoxy varnish. The special finish makes cleaning easy. The shelf unit is easy to assemble on site and all parts fit well. The shelf unit can also be used as a mobile storage unit by replacing the foot with optional Ø 125 mm castors.


COMBINATIONS


455 mm depth – Basic module 5 shelves		Add-on module 5 shelves	Size (W x H x D), mm
478728870		561930070	610 x 1895 x 455
478728871		561930071	914 x 1895 x 455
478728872		561930072	1220 x 1895 x 455
478728873		561930073	1524 x 1895 x 455
478728874		561930074	1830 x 1895 x 455
610 mm depth – Basic module 5 shelves		Add-on module 5 shelves	Size (W x H x D), mm
561737570		561930170	610 x 1895 x 610
561737571		561930171	914 x 1895 x 610
561737572		561930172	1220 x 1895 x 610
561737573		561930173	1524 x 1895 x 610
561737574		561930174	1830 x 1895 x 610
Art. no.	Description		
464010580	Castor, non-lockable, 1 pc		
464010581	Castor, lockable, 1 pc		



MODULAR STORAGE CABINET

SPRI

A range of versatile free-standing modular storage cabinets. Available in pass-through and single-door versions, both designed to fit modular basket systems. The door may be solid or with an integrated glass window. The cabinet is as standard equipped with 8 pairs of brackets for 8 SPRI baskets, or with solid shelves for general storage.

A pass-through version of the cabinet is available for mounting in a wall opening. All models are made of easy-to-clean white melamine-coated particleboard with a light gray baseboard.

These can for example be used for storage of extra/new instrument in the clean area or as pass-through cabinets from the sterile storage.

SPRI baskets	Melamine door	Glass door	Pass-through cabinet	Overall size, (W x H x D) mm
8	469891870	469891876	Yes	655 x 2100 x 450
8	469891872	469891874	No	655 x 2100 x 450
6		469891879	Yes	655 x 1850 x 450

Shelves	Melamine door	Glass door	Pass-through cabinet	Overall size, (W x H x D) mm
8	469891873	469891875	No	655 x 2100 x 450
6		469891880	Yes	655 x 1850 x 450



GETINGE SMART DTO


Note: Our Getinge SMART DTO-series can also be used as mobile sterile storage. You will find more information about these products on page 29.



Goods Carriers

Through the sterile flow, standardized modular load carriers, in the form of wire baskets or containers, carry the instruments all the way from the OR and back again after completed cleaning, disinfection, inspection and sterilization. Our comprehensive range of hygienically designed trays and baskets forms an essential part of Getinge's complete system. Easy to handle, easy to clean and perfectly adapted to the demands of modern hospitals and other applications, they are all designed for flexibility. And, just like our distribution trolleys, they are available as open or closed, depending on your distribution needs.

These include a couple of trolleys from our state-of-the-art Getinge SMART range, which takes loading and distribution of instruments to a whole new level of ergonomics and function. Getinge SMART trolleys are equipped with a semiautomatic loading function to reduce manual handling of goods when loading or unloading, as well as nearly effortless maneuverability.

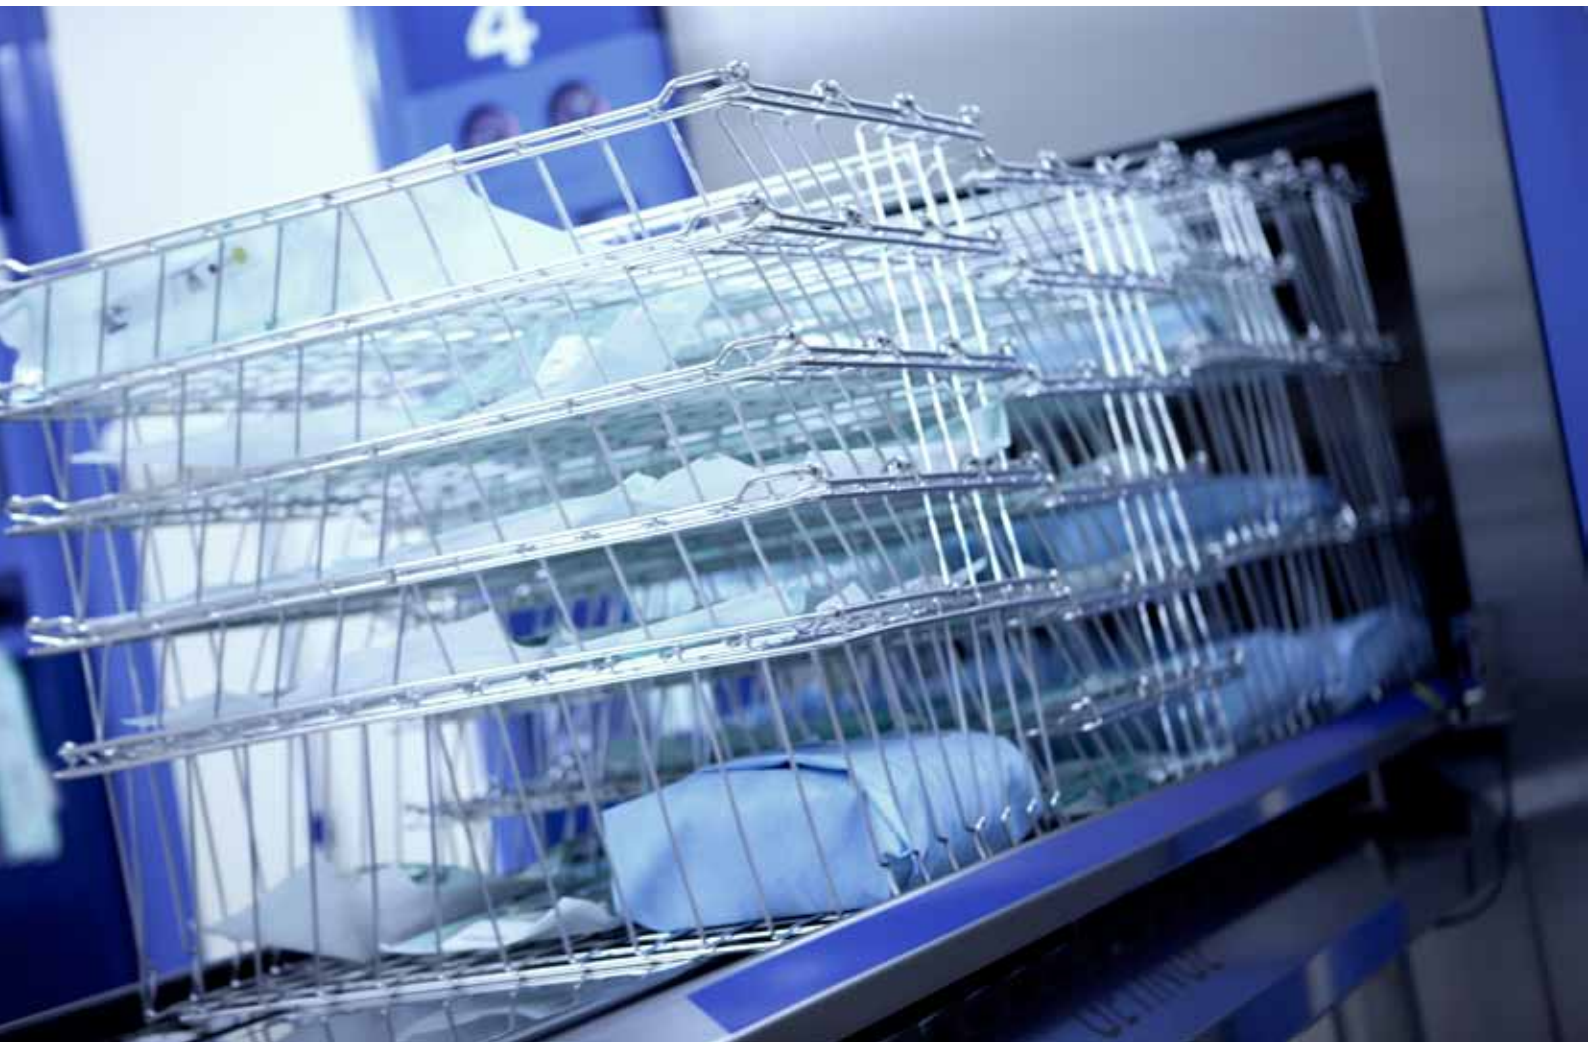



1. Getinge SMART hard-cover distribution trolley, DTHC
2. Worktable
3. Basket trolley (BUS)
4. Wire basket

5. Getinge SMART open distribution trolley, DTO single
6. Getinge SMART open distribution trolley, DTO double



WIRE BASKET



Modular wire baskets made of stainless steel. Adapted to Getinge washer-disinfectors, conveyors, loading/unloading equipment, sterilizers as well as storage racks and distribution trolleys. Stackable when loaded, nestable when empty.

Art. no.	Description	Size (LxWxH), mm
561620001	High	585 x 395 x 195
561620101	Low	585 x 395 x 100



LID FOR SPRI WIRE BASKET



Ideal for mixed loads of baskets and containers. When equipped with a lid, it is possible to stack a container on top of the basket without risking damage to the contents of either. This also means greater flexibility and utilization of space, both when loading a sterilizer and during storage and transport. The lid is made of electro-polished stainless steel.

Art. no.	Size (L x W), mm
561685301	555 x 385



WIRE BASKET



Modular wire baskets made from high-quality stainless steel. The baskets have a smooth finish with large mesh loops of continuous wire. The baskets are stackable and have integrated handles for easy gripping. Available in sizes ½ STU and 1 STU.

Art. no.	Description	Size (LxWxH), mm
5619247	1/2 STU	575 x 280 x 135
5619248	1 STU	575 x 280 x 265



WIRE BASKET



Modular sterilizing baskets made of stainless steel. Easy to clean and disinfect in a washer-disinfector. Self-drying after disinfection in hot water (min 85°C). Modular design with standard sizes. High precision, nestable and stackable.

Art. no.	Size (LxWxH), mm
560330901	600 x 400 x 100
560331001	600 x 400 x 195



TRANSPORT TOTE BOX



Versatile plastic tote box used for safe, reliable transport of used, soiled or sterilized goods. Adapted to modular sterilizing baskets, SPRI sizes 585x395x195 mm (LxWxH). Constructed with a flat bottom for handling on conveyors. Nestable when empty, saving space. Washable at +90 °C.

Art. no.	Description	Size (LxWxH), mm	Size (LxWxH), mm
		External	Internal
463113401	Tote box	650 x 450 x 224	565 x 376 x 218
463113601	Lid	650 x 450	



FINE-MESH BASKET

W SPRI DIN ISO

This fine-mesh basket with lid is ideal for holding small, sharp instruments during the washing/disinfection process.

The basket is made of stainless steel with mesh size 1.5 mm.

Art. No	Size (LxWxH), mm
499363700	100 x 100 x 60
499363701	60 x 60 x 45
499363702	120 x 60 x 45
499363703	150 x 60 x 45



FINE-MESH INSTRUMENT TRAY

W SPRI DIN ISO

Fine-mesh sterilizing and processing tray designed for use with modular sterilizing, processing baskets and instrument trays. For delicate instruments through all phases of processing: cleaning and disinfection, ultrasonic cleaning and sterilization.

Mesh size: 1.6 mm. Clean surfaces and no exposed wire ends. Material: stainless steel

Fine-mesh instrument tray	Lid	Size (LxWxH), mm
Art. no.	Art. no.	
932895	932896	210 x 150 x 40
932894	476944000	310 x 210 x 40
705300	705320	420 x 310 x 40



INSTRUMENT TRAY

W DIN

Modular instrument tray for use through all phases of instrument processing. Manufactured as a deep-molded immersion tray, giving exact dimensions and stability against careless handling. Made of stainless steel wire net and equipped with two inner-mounted drop handles.

Art. no.	Size (LxWxH), mm
561620501	240 x 250 x 50
561620601	480 x 250 x 50



INSTRUMENT TRAY

W SPRI ISO

Stackable instrument tray in standard sizes for use through all phases of instrument processing. Easy to clean and disinfect in a washer-disinfector and designed for fast self-drying. Made of stainless steel, electro-polished wire with a mesh size (6.5 mm) large enough to allow the flow of air and water, yet small enough to prevent instrument damage.

Select from two types of lids for full utilization of the trays:

Lid with snap-on locking.

Lid with handle for placement inside the tray. Keeps small instruments in place during the disinfection process.



Instrument tray	Size (LxWxH), mm	Lid	Lid with handle
Art. no.		Art. no.	Art. no.
466309101	250 x 170 x 70	498637400	498816900
466309201	340 x 250 x 70	477345300	498816901
466309301	450 x 340 x 70	477345200	498816902



PERFORATED INSTRUMENT TRAY



With flat wire base and perforated side walls, for use through all phases of instrument processing. The perforated side wall protects smaller instruments and packing material against damage. Made of stainless steel material. Equipped with two inner-mounted drop handles.

Art. no.	Size (LxWxH), mm
561957001	240 x 250 x 60
561957101	480 x 250 x 60



ENDOSCOPE BASKET



Suitable for cleaning, sterilization, storage and transport of endoscopic instruments. No open wire ends or sharp protrusions. Removable lid with special closing device. The silicon holders keep the instruments securely in place. Material: stainless steel

Art. no.	Description	Size (LxWxH), mm
561620701	For one endoscope	290 x 80 x 52
561620702	For two endoscopes	290 x 80 x 52
561620801	For one endoscope	460 x 80 x 52
561620802	For two endoscopes	460 x 80 x 52
561620901	For one endoscope	670 x 80 x 52




INSTRUMENT FIXATION SYSTEM



For safe storing of either general or bayonet-shaped or long shank instruments in instrument trays. Suitable for all instrument trays of STU standards according to DIN 58952-2, as well as for the SPRI trays. Can be firmly fixed in the instrument trays, if so required. Infinitely adjustable to the instruments to be stored. Use within the complete instrument cycle, i.e. cleaning, sterilization, instrumentation, without any additional handling.



Art. no.	For tray length min. 240 mm	Size (LxWxH), mm
1 561958001	For general instruments/one fixation	231 x 227 x 50
2 561958101	For bayonet-shaped instruments/one fixation	231 x 227 x 50
3 561958501	For general instruments, adjustable fixation 60–214 mm	214 x 240 x 50
Art. no.	For tray length min. 480 mm	Size (LxWxH), mm
4 561958201	For general instruments/one fixation/480 mm long tray	406 x 231 x 52
5 561958301	For general instruments/two fixations/480 mm long tray	406 x 231 x 52
6 561958401	For bayonet-shaped instruments/two fixations/480 mm long tray	406 x 231 x 52

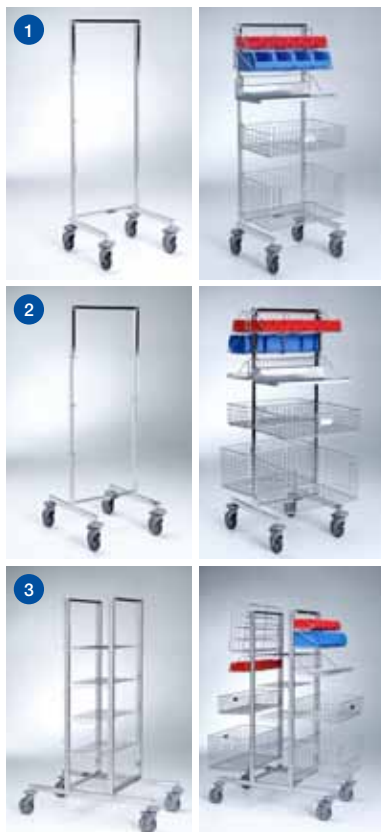

FLEXIBLE STORAGE TROLLEYS & ACCESSORIES

A range of convenient and flexible storage trolleys suitable for every facility. Each trolley can be tailor-made to suit every special need, yet with flexibility to adapt as needs change. Simply choose one of the three trolley models, then select any of the many optional accessories from the range and hook them on the trolley. You can now load the trolley to serve as convenient, dust-free storage or wheel it to the point of use.

1. Single-sided mobile modular trolley with hooks for the transport and storage of baskets and utility shelves. Designed with 8 hooks, for a capacity of four (4) accessories. This trolley is made of stainless steel and equipped with four (4) swivel wheels 2 with brakes.
2. Modular trolley for transport and storage of baskets and utility shelves. The trolley is equipped with hooks on two sides, enabling double access to the utilities in the load. Designed with 16 hooks for a capacity of eight (8) accessories. Made of stainless steel and equipped with four (4) swivel wheels, 2 with brakes.
3. Double-sided trolley with a central compartment for storage of baskets, accessories and containers. The trolley offers numerous possibilities for modular arrangement. Designed with 16 hooks for a capacity of eight (8) accessories and 5 shelves in the central compartment. Made of stainless steel and equipped with four (4) swivel wheels, 2 of them with brakes.

	Art. no.	Description	Size (LxWxH), mm
1	5618618	Single-sided	600 x 480 x 1550
2	5618615	Double-sided	600 x 600 x 1550
3	5618625	Double-sided with shelves	600 x 1150 x 1550



	Art. no.	Description	Size (LxWxH), mm
1	5618488	Plastic bin 3 liters, blue	235 x 145 x 130
2	5618489	Plastic bin 1 liter, red	165 x 105 x 75
3	5618430	Shelf for plastic boxes/bins, 2 levels. Capacity: lower 4x3 liters & upper 6x1 liter	600x 200 x 300
4	5618435	Shelf for plastic boxes/bins. Capacity: 6x1 liter	600 x 180 x 150
5	5618649	Wire basket	600 x 400 x 150
6	5618652	Basket with front opening for easy access to contents	600 x 400 x 300
7	5618418	Shoe rack. Capacity: 6 pairs	600 x 230 x 170
8	5618429	Wire rack for suture material, 4 levels.	600 x 400 x 150
9	5618416	Solid shelf for storage	600 x 300 x 150
10	5618638	Wire basket	600 x 150 x 150
11	5618648	Wire basket	600 x 300 x 300
12	5618411	Wire shelf	600 x 300 x 150

GETINGE SMART DISTRIBUTION TROLLEYS

Our goods carriers include state-of-the-art Getinge SMART distribution trolleys, for outstanding ergonomics and functionality.



OPEN DISTRIBUTION TROLLEY (DTO)

The DTO is an open distribution trolley as well as a mobile storage unit for wire baskets and containers. The open design makes viewing and picking of individual packs very easy. Goods can be loaded and unloaded from both sides of the trolley. Shelves and baskets can be pulled out halfway for easier access and the trolley is easily secured for safe transport.

Getinge SMART open distribution trolleys are available in single or double versions of each model: three models configured for standard loads, delivered with guides for baskets, shelves for containers or mixed. Furthermore there is one base model that can be individually configured, where guides are specified and ordered separately for each customer's individual configuration of a mixed load of shelves and/or baskets. The flexible placement of support guides and shelves maximizes utilization of the DTO.

The high-quality swivel casters (two of which are lockable) enable easy moving and maneuvering even when the trolley is fully loaded. These trolleys are designed for cleaning and disinfection in an automatic washer-disinfector.

HARD-COVER DISTRIBUTION TROLLEY (DTHC)

In this trolley, instrument containers and baskets can be grouped together with utensils, linen, disposables and anesthesia material for transport to an internal OR department or to an external hospital or storage facility. The hard cover protects the sterile goods from dust and damage during transport. The trolley can be cleaned disinfected in a washer-disinfector, as the doors can be opened 260° and fixed in the open position – also very convenient when loading and unloading. The door handle is prepared for a locking device. The DTHC trolley is equipped with two lockable swivel casters and two lockable fixed casters. The caster diameter is 160 mm.

The DTHC trolley has a capacity of 15 DIN STU ½ size, if adding two additional shelves. Three (3) shelves are supplied as standard, optional shelves are available. Each shelf is supplied with two dividers to keep goods in place during transport. An optional pin and towbar is available to enable towing.



GETINGE SMART OPEN DISTRIBUTION TROLLEYS (DTO)

Art. no.	Type of load	Description	Max load weight, kg	Size (LxWxH), mm
564718170	Baskets	DTO single SPRI, 10 low or 5 high	85	736 x 429 x 1577
564718770		DTO double SPRI, 20 low or 10 high	170	1416 x 429 x 1577
564718370	Mixed	DTO single, 2 SPRI high/3 shelves	85	736 x 429 x 1577
564718870		DTO double, 4 SPRI high/6 shelves	170	1416 x 429 x 1577
564718570	Shelves	DTO single, 5 shelves	85	736 x 429 x 1577
564718970		DTO double, 10 shelves	170	1416 x 429 x 1577
564718070	Individually configured	DTO single base without guides	85	736 x 429 x 1577
564718670		DTO double base without guides	170	1416 x 429 x 1577
564718171		pair of guides SPRI	18	30 x 425 x 50
564718271		pair of guides ISO	18	30 x 425 x 50
564718571		pair of guides and shelf	18	30 x 425 x 50
564718470		External transport lock		
560125070	Options	Disposable transparent cover, 50 covers/roll		
6003000052		Reusable cover for DTO single		
6003000053		Reusable cover for DTO double		

GETINGE SMART HARD-COVER DISTRIBUTION TROLLEY (DTHC)


Art. no.	Description	Max load weight, kg	Size (LxWxH), mm
564719070	Hard-cover distribution trolley (DTHC)	145	1286 x 699 x 1502
564719071	Wire shelf incl. 2 dividers		
564719075	Pin and towbar		



PROTECTIVE COVERS

The open distribution trolleys DTO and BUS can be fitted with covers for further protection of the goods during transport and storage. The range includes both disposable plastic covers and washable cloth covers. The cloth covers have zippers in two corners so that one long side can be opened for easy access to the goods.

Art. no.	Description
6003000052	Reusable cover for DTO single, blue
6003000053	Reusable cover for DTO double, blue
560125070	Disposable covers, transparent, in rolls of 50 covers
560099601	Reusable cover for BUS, blue (for 1535 mm height)
560099602	Reusable cover for BUS, green (for 1535 mm height)

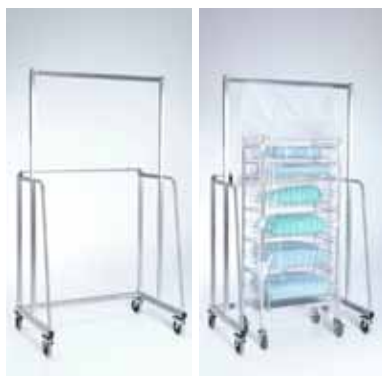

RACK FOR DISPOSABLE COVERS

The mobile rack makes it easy to place a disposable cover (560 12 50-70) over the BUS trolley. It is made of high-quality stainless steel. All wheels have brakes for convenient handling. The rack is also available in a wall-mounted version. Disposable covers, transparent, in rolls of 50, are ordered separately.

Art. no.	Description	Size (LxWxH), mm
560181301	Rack for disposable covers (BUS)	700 x 1000 x 1940
560181302	Wall-mounted rack	
560125070	Disposable covers, transparent. 50 covers/roll	



IDENTIFICATION TAG

For use on baskets in sterile storage.



Art. no.	Description	Size (LxWxH), mm
561585401	Marking tag with plastic pocket	85 x 45 (+15 mm loop)



BASKET TROLLEY



The basket trolley is designed for storage and transport of empty, stacked/nested, modular, wire sterilization baskets and tote boxes, and for storage of loaded baskets. The basket trolley has 4 swivel castors (diameter 75 mm), mounted in ball bearings, to make it easy to handle even in narrow passages. The trolley is made of stainless steel and is easy to clean and disinfect in a washer-disinfector. The trolley can, as an option, be adapted with a removable handle, easy to attach, for improved convenience during transport. Load capacity: approx. 150 kg.

Art. no.	Description	Size (LxWxH), mm
470537604	Basket trolley	730 x 505 x 155
470537606	Handle	



CLOSED TRANSPORT TROLLEY



A fully welded durable construction in 18/10 stainless steel. Capacity: 9 STU with 3 solid removeable shelves/4 levels (3 x 3 STU) for great flexibility. Fitted with 2 fixed castors and 2 swivel castors with brakes. Housing of 18/10 stainless steel suitable for cabinet washers. Wheel dimension 160 mm. Doors open to a maximum of 270°.

Art. no.	Description	Size (LxWxH), mm External	Size (LxWxH), mm Internal
561720201	Closed transport trolley	1220 x 735 x 1450	994 x 640 x 1075
561720202	Closed transport trolley, lockable	1220 x 735 x 1450	994 x 640 x 1075



DISTRIBUTION TROLLEY



For ergonomic, manual distribution of sterilized goods or return of used goods. Adapted for wire baskets (585x395x195/100 mm) and/or closed tote boxes. Basket capacity: 8 (2x4). Equipped with convenient handle. Made of polished stainless steel. Easy to clean and disinfect. Distribution trolleys can be fitted with covers for further protection of the goods during transport and storage. The range includes reusable covers as well as disposable ones.

Art. no.	Capacity, baskets/boxes	Size (LxWxH), mm	Reusable cover	Disposable cover
470263101	8 (2 x 4)	1105 x 660 x 1400	470998501	479380001 (100 pcs)
470263301	12 (3 x 4)	1580 x 660 x 1400	478671101	479380101 (100 pcs)
Art. no.	Description			
463113401	Tote box			
463113601	Lid			
561620001	Wire basket high SPRI			
561620101	Wire basket low SPRI			



DISTRIBUTION TROLLEY

Intended for external transports and suitable for towing. Equipped with 2 swivel and 2 fixed wheels. Well-built galvanized steel construction. Delivered with 3 removable shelves that can also be used as side gables. The trolley can be complemented with an additional shelf for extra storage capacity.

Art. no.	Description	Capacity, kg	Size (LxWxH), mm
478 73 49-01	Trolley	500	1020 x 740 x 1750
478 73 49-02	Extra shelf		930 x 680



TABLE TROLLEYS



Multi-purpose ergonomic trolleys suitable for internal transports or temporary utility space. Made of all-welded chrome-plated steel tubing with handlebars. Top and bottom shelves are made of pressed stainless steel with a beaded edge. Fitted with four 125 mm anti-static wheels for easy handling.

Art. no.	Description	Wheel diameter mm	Size (LxWxH), mm	Shelf size (LxW), mm
460443302	Table trolley	125	1080 x 550 x 800	950 x 550
560085270	Instrument trolley	75	640 x 400 x 850	600 x 400



LIFT TROLLEY

Lift trolley for comfortable handling of both light and heavy goods. Hygienic design with accessible handles on a compact frame. The size of the lifting platform is 525 x 470 mm, which also allows the trolley to serve as a temporary work platform. The lifting height is 140–1735 mm and the lifting speed is 120 mm/sec. Strong wheels allow smooth handling of loads up to 70 kg/155 pounds. The battery-powered lift is silent and has a built-in drop protection device for extra safety.

Art. no.	Size (LxWxH), mm	Charging voltage
561905101	875 x 525 x 2070	100-240V (electrical safety class IP44)

Did you know ...

... that Getinge also offers a full range of Getinge Assured wash checks that independently monitor your facility's processes and provide you with the added assurance that your instruments and utensils are clean?

4

5

6

7

8

9

10



Water Test & Pre-Treatment

The lifetime of sterilization and disinfection equipment, as well as the general hygiene of your facility, can be greatly affected by the quality of the water you use. Getinge offers a selection of highly effective and cost-efficient water purifiers, filters and softeners to help you solve such water problems. To assure the right products for your application, contact your Getinge representative.





PRE-FILTER

Pre-filter for reduction of free chlorine in connection with reverse osmosis RO-51. Filter housing made entirely of corrosion-resistant PP plastic, equipped with a vent valve. 5-micron active carbon cartridge, 10". The cartridge should be manually replaced before the pressure drop exceeds 1.5 bar. Cartridge removal requires 100 mm of free space below the filter.

Options: console, removal tool.

Filter + Housing	591929901		
Capacity L/min	5–50	Connections	3/4"
Height mm	315	Working pressure bar	6
Diameter: mm	120	Max temperature °C	40
Extra filter	591929902		



WATER SOFTENER PRINCESS MIDI-E

Compact, fully automatic, high-grade water softener for free-standing installation, with built-in salt container. The water softener is made entirely of corrosion-resistant ABS plastic with an attractive external surface. The polystyrene type ion-exchanger is flushed and regenerated automatically.

25 kg salt tablets included in delivery.

Art. no.	469034201		
Capacity L/min	25–40	Salt contents kg	50
m³/regeneration at 1°dH	42–52	Size (B x H x D), mm	260 x 1050 x 410
Salt tablets 25 kg	469034202		



WATER SOFTENER PRINCESS TURBO-E

Compact, fully automatic, high-grade water softener with percolator for efficient iron removal. Free-standing installation, with built-in salt container. The water softener is made entirely of corrosion-resistant ABS plastic with an attractive external surface. The polystyrene type ion-exchanger is flushed and regenerated automatically.

25 kg salt tablets included in delivery.

Art. no.	469034401		
Capacity L/min	30–45	Salt contents kg	100
m³/regeneration at 1°dH	100–120	Size (B x H x D), mm	300 x 1150 x 500
Salt tablets 25 kg	469034202		



REVERSE OSMOSIS

A reverse osmosis technique that reduces the amount of dissolved salts by up to 99%. The compact, space-saving unit has everything in one cabinet. Delivered completely pre-assembled and tested at the factory for fast, easy installation.

Depending on the quality of the raw water, additional pre-treatment may be necessary.

Art. no.	561738401		
Capacity L/h	160	Installed power kW	1.3
Water exchange %	40–80	Power consumption kWh/ m³	3.4
Salt reduction %	> 98	Inlet connection, Ø	1/2
Water quality µS/cm	< 20	Drain connection, Ø mm	10
Tank L	50	Outlet connection, Ø	3/4
Electrical current	230 V/50 Hz	Size (B x H x D) mm	350 x 750 x 560

LEVEL-1 ON SITE WATER TEST STANDARD



WATER TEST KIT

Complete kit including chloride test, silica test, pH test and water hardness test (see details below).

Art. no.	Description
6003000001	Water test kit



CHLORIDE TEST

This test includes everything needed to determine the chloride level of water. The chloride level in mg/L (ppm) is determined by a mercuric nitrate titration, a test that according to the ISO 15705:2002 method indicates chloride interference in seconds.

- Method: Mercuric nitrate titration
- Range: 0-100 mg/L, 0-1000 mg/L
- Weight: 460g
- Number of tests: 110 (approx.)
- Smallest increment: 1mg/L
- Case dimensions (LxWxH): 200x120x60mm

Art. no.	Description
6003000005	Chloride test



SILICATE TEST

Test kit for determination of silica concentration in water, according to the ASTM D859 method of the heteropoly.

Art. no.	Description
6003000004	Silicate test



PH TEST

Color-fixed, non-bleeding indicator sticks for rapid testing. Specially developed indicator dyes guarantee sharp differentiation between the individual pH values and a clear and easy comparison in the color scale. Long sticks prevent fingers from coming in contact with test solution.

- Range: 0-14 pH
- Smallest increment: 1 pH
- Number of sticks: 100 pcs

Art. no.	Description
6003000002	pH test



WATER HARDNESS TEST

Single-use test strips for quick and easy determination of water hardness (Ca,Mg). The convenient dip-and-read procedure with clear color changes from green to red ensure reliable results within seconds.

- Range: 0-10-15-20 and 25 °dH
- Number of sticks: 100 pcs

Art. no.	Description
6003000003	Water hardness test

LEVEL-2 ON SITE WATER TEST – ADVANCED

CONDUCTIVITY TEST



A pocket tester that measures conductivity (EC) and total dissolved solids (TDS). With advanced features such as replaceable graphite electrode, adjustable TDS ratio, temperature in °C or °F, automatic temperature compensation, automatic calibration – all in a floating, waterproof casing. Weight: 100 g. Dimensions: 163 x 40 x 26 mm

Range:	Resolution:
• EC: 0-3999 uS/cm	• EC: 1uS/cm
• TDS: 0-2000 ppm	• TDS: 1 ppm
• Temperature: 0.0-60.0°C/31-140.0°F	• Temperature: 0.1°C/0.1°F

Art. no.	Description
6003000006	Conductivity test



CALIBRATION FLUID

- 413 µS/cm
- Number of bags: 25

Art. no.	Description
6003000006	Conductivity test



TOTAL SALINITY TEST

Quick and simple measurement of refractive index, provides the user an accepted method for NaCl analysis. The unit can display the measurement of NaCl concentration in 4 different ways (g/100g, g/100mL, specific gravity and Baumé) and has automatic temperature compensation.

Range:	Resolution:
• 0-28 g/100 g	• 0-1 g/100 g
• 0-34 g/100 mL	• 0-34 g/100 mL
• 1.000-1.216 Specific Gravity	• 0.001 Specific Gravity
• 0-26 °Baumé	• 0.1 °Baumé
• Temperature 0-80°C/32-176°F	• 0.1°C/0.1°F

Art. no.	Description
6003000008	Total salinity test



TOTAL SALINITY TEST CLEANING

For calibration of refractometer. Including pipettes for convenient dosage.

- Number of bags/pipettes: 25/25 pcs

Art. no.	Description
6003000009	Total salinity test cleaning

LEVEL-3 – LABORATORY WATER TEST



LAB TEST

When a more advanced analysis is required, a water sample can be sent to a lab for more detailed chemical analysis. This test is to be used when the analysis provided by the available water testing kits is not sufficient to determine the contaminant(s). Please note that this type of testing should be done locally, at a lab approved by Getinge (consult your Getinge representative). The kit includes a 500 ml plastic bottle with label and packaging for sending the water sample to the lab for testing.

Art. no.	Description
6003000010	Lab test

5

6

7

8

9

10



Detergent Accessories

In addition to the detergent range itself, Getinge offers a number of ergonomically designed accessories. These products include the right protective equipment, as well as guidelines for handling the detergents in the right way and selecting the right detergent for the water quality in question.





CANISTER PUMP

Canister hand pump for convenient dosage of Getinge Clean detergents, 10 ml per stroke. The pump comes with a 51 mm closure cap and dip tube designed for 5 L canisters. Made of polymer material.

Art. no.	Description
6003000012	Canister pump for 5 L bottle, 10 ml stroke



MEASURING BEAKER

Graduated beakers with pouring lip for measuring detergent dosage volumes. Made of polypropylene.

Art. no.	Description
6003000013	Measuring beaker. 500 ml, plastic, graduated with pouring lip
6003000014	Measuring beaker. 1000 ml, plastic, graduated with pouring lip



CANISTER KEY

Key for opening or tightening the caps on 5-, 10- and 25-liter detergent canisters. Made of polymer material.

Art. no.	Description
6003000015	Canister key. Small, plastic wrench type for 5/10 L
6003000016	Canister key. Medium, plastic wrench type for 25 L



CANISTER KEY

Tool for opening or tightening a 2" bung stopper on a 205 L barrel. Made of polymer material.

Art. no.	Description
6003000017	Canister key. 2" bung opening key for 205 L barrel.



PROTECTIVE GLOVES

For protection of hands while performing tasks involving detergents. One size, latex-free, nitrile gloves. Superior resistance to most chemical types. 12 pairs/pack

Art. no.	Description
6003000019	Protective gloves. Chemical resistant, heavy-duty nitrile size L.



PROTECTIVE GOGGLES

Convenient one-size model, safety goggles for eye protection when handling detergents. Manufactured to EN 1661F. Made of polymer material.

Art. no.	Description
6003000020	Protective goggles



BARREL WEDGE

Durable plastic wedge for slight tilting of 205 L barrels for efficient dispensing of remaining detergent. Moulded with anti-slip grooves into the angled surface.

Art. no.	Description
6003000018	Barrel wedge for optimal draining of 205l barrel.



BARREL TROLLEY

Durable trolley for easy maneuvering and transport of 205 L barrels. Pneumatic rubber wheels, 260x85 mm.

Art. no.	Description
6003000024	Barrel trolley for 205 L barrels.



SPILL PLATFORM

Low-profile spill platform with seamless design to ensure that any leaks or spills are captured in the sump, before they reach floor drains or create a slip hazard. Sturdy grates are nearly 64 mm (2-1/2") thick for superior crack-resistance. Eco-friendly, made of 100% recycled polyethylene nearly impervious to chemicals, including acids and corrosives. For storage of 2 barrels (2 x 205 liters), max load 1134 kg Sump capacity 90 L. Dimensions: 140x1245x635 mm (HxWxD).

Art. no.	Description
6003000021	Spill platform



RAMP

Ramp with friction ribs for maximum safety when loading and unloading heavy drums. Can be placed on either side of the spill platform. Made of polyethylene.

Art. no.	Description
6003000022	Ramp for spill platform



DRAIN AND JOINT KIT

Kit designed to firmly lock spill platforms together, for a continuous sump and expanded storage space. The kit includes one pair of stainless steel joining clips, one pair rubber grommets, and one PTFE transfer tube.

Art. no.	Description
6003000023	Drain and joint kit. Joining clips, rubber grommets and PTFE

Did you know ...

... that we also offer the Getinge Clean detergent range, which has been developed, tested and validated on Getinge washer-disinfectors to consistently meet EN ISO 15883 standards for cleaning efficiency of goods commonly found in CSSDs, clinics and practices to protect users and patients?



7 Operation Rooms

EQUIPMENT FOR THE OPTIMUM STERILE GOODS WORKFLOW

To secure the best routines for infection control, high efficiency and an ergonomic workplace, the entire circulation of sterile goods must be considered. That's why Getinge not only offers washer-disinfectors and sterilizers, but complete processing systems with thought-through loading equipment and accessories that may be needed.

Together with the machines, the equipment for loading/unloading, inspection, packing, storage and distribution provides an efficient and seamless flow of sterile goods, where everything fits together with coherent design and functionality.

Through this flow, standardized modular load carriers, in the form of wire baskets or containers, carry the instruments all the way from the OR and back again after completed cleaning, disinfection, inspection and sterilization.





- | | |
|---|-------------------------|
| 1. Pass-through cabinet | 4. Surgical wash-basin |
| 2. Geringe SMART open distribution trolley,
DTO single | 5. Pass-through cabinet |
| 3. Wire basket | |



PASS-THROUGH CABINET

SPRI

Pass-through cabinets for storing of sterilized goods in wire baskets. These cabinets are available in two models, for placing baskets with either the long or the short sides facing the cabinet door. The cabinet is modular, with 1–4 compartments for recessed mounting through a wall. The cabinet is designed for 12 low or 6 high modular SPRI wire baskets in each compartment. The cabinet is made entirely of polished, acid-resistant stainless steel. Basket guide tracks are molded directly in the inner steel plate, giving a smooth easy-to-clean surface for good interior hygiene. The cabinet doors have a robust construction for shape stability. Each door has a twist grip and a sealing gasket to prevent air-leakage. The cabinet door on the issue side (normally into the OR) is as standard hinged on the left and has a recessed transparent panel for a good view of the cabinet contents. The door on the supply corridor side is hinged on the right and has double walls with filling between the plates. The cabinet is constructed with one movable and one fixed connection frame to cover the wall opening.

Long basket side facing door	No. of compartments	Size (W x H x D), mm	Shelf for cabinet
561635670	1	650 x 1500 x 435	561635674
561635671	2	1300 x 1500 x 435	
561635672	3	1950 x 1500 x 435	
561635673	4	2600 x 1500 x 435	
Short basket side facing door			
561635570	1	460 x 1500 x 625	561635574
561635571	2	920 x 1500 x 625	
561635572	3	1380 x 1500 x 625	
561635573	4	1840 x 1500 x 625	



ASSISTANCE & PREPARATION TABLES

Electrical height-adjustable assistance tables made of stainless steel profiles with a stainless steel top. Beaded edge prevents accidental dropping of instruments. Adjustable height: 800–1200 mm. Max load: 30 kg. A separate electrical charger is included in the delivery.

Art. no.	Description	Size (L x W), mm
561680001	Assistance table	600 x 400
561680101	Assistance table	700 x 500
561680201	Preparation table	700 x 500
561680301	Preparation table	950 x 550



SURGICAL WASHBASIN

An OP wash basin designed to collect any water dripping from the arms, thereby reducing the risk of slippery floors. Ideal for any facility with extremely high demands on hygiene. Made of acid-proof stainless steel. Can be equipped with knee-operated or photocell-operated faucet. Smooth surfaces and removable strainer.

Art. no.	Description	Size (LxWxH), mm
560078201	Surgical washbasin	1000 x 660 x 200
560078203	Knee-operated faucet	
560078204	Photocell-operated faucet	

Did you know ...

... that we also offer a full range of Getinge Assured indicators that independently monitor your facility's processes and provide you with the added assurance that your instruments and utensils are sterile?





Endoscope Reprocessing

ACCESSORIES FOR THE BEST POSSIBLE WORKFLOW

As the use of endoscopes increases, so does the risk of infections linked to reprocessing – and with it, the need for “zero tolerance” of cross-contamination. There’s only one way to achieve this.

Getinge applies a system approach to endoscope reprocessing, the same approach that has made us the world leader in disinfection and sterilization of reprocessed instruments. Assuring cost-efficient endoscope processing takes more than just the right equipment. That’s why Getinge’s complete solutions also include architectural planning, training, traceability, service & support, consumables and accessories; everything from endoscope connector kits to furniture and trolleys for a smooth workflow.

The furniture on the following pages is specially developed for use with endoscopes and the processes related to them.





PRE-CLEANING UNIT

The pre-cleaning unit is made of composite material with a long shallow sink placed in the middle to facilitate pre-cleaning of flexible endoscopes. The wall is protected by an integrated 60 mm splash-edge, and is wall-mounted on 4 brackets for easy cleaning of the floor. The pre-treatment unit is universal and can be placed in any direction. It is prepared for docking/locking of storage trolleys and a waste trolley.

Art. no.	Size (LxWxH), mm
5618125	1600 x 600 x 230



U-SHAPED TRANSFER TABLE

The U-shaped transfer table serves as a barrier between the soiled and clean sides. It has the same shape as the Getinge Poka-Yoke AER and is wall-mounted on 2 wall brackets to facilitate cleaning of the floor.

Art. no.	Size (LxWxH), mm
5618124	800 x 600 x 100



CLEAN TABLE

The clean table is suitable for re-assembly of endoscopes after reprocessing. It is made of composite material and is equipped with a protective 60 mm splash-edge against the wall. It is wall-mounted on 2 brackets, which facilitates cleaning of the floor. The clean table is prepared for docking/locking of either a storage trolley or a waste trolley.

Art. no.	Size (LxWxH), mm
5618122	750 x 600 x 100



CHEMICAL STORAGE TROLLEY

The chemical storage trolley can be locked to the pre-cleaning unit for safe storage of chemicals. The trolley holds 2 disinfectant bottles and 3 detergent bottles. It has an adjustable handle that is used for easy transport and when docking the trolley to the pre-cleaning unit. Four swivel wheels (2 of which are lockable) ensure safe transport from your buffer storage.

Art. no.	Size (LxWxH), mm
5618287	550 x 540 x 860



STORAGE TROLLEY

For storage of gloves, brushes etc. The trolley has an adjustable handle that is used during transport and when docking the trolley to the pre-cleaning unit. Four swivel wheels (2 of which are lockable) ensure safe transport from your buffer storage. Lockable with key to the pre-treatment unit for safe storage. This unit also fits under the clean table.

Art. no.	Size (LxWxH), mm
5618116	550 x 540 x 860



WASTE TROLLEY

The waste trolley is designed to be placed next to the Poka-Yoke AER and is suitable for general waste such as gloves, brushes etc used in the pre-cleaning area. It is lockable to the pre-cleaning unit. A foot-pedal is used for tilting, thus keeping your hands free. A gas cylinder assures soft self-closing after use. Three wheels and a handle facilitate moving.

Art. no.

5618117

Size (LxWxH), mm

470 x 560 x 860



WALL RAIL

The wall-rail serves as a multi-purpose holder. It is easy to keep clean, and space is provided for electrical cabling. It is mounted directly on the wall and allows mounting of accessories such as chart, connector and printer holders. All holders are easy to attach and reposition.


Art. no.

5618118

Size (LxWxH), mm

1600 x 30 x 110

ACCESSORIES FOR MOUNTING ON THE WALL RAIL



1



2



3



4

1. PRINTER HOLDER

The holder for the thermo-transfer printer assures that your documentation is close at hand. It is mounted on the wall rail and helps keep the tabletop area clear. The printer holder is adjustable and has a swivel function.

2. CHART HOLDER

This swivel chart holder keeps instructions for use/manual pre-cleaning etc close at hand. It is adjustable in height and moveable to the side. The front is possible to flip, giving easy access for everyone in the department. The holder includes up to ten A4 plastic holders for instructions.

3. CONNECTOR HOLDER

The connector holder transfers bags with clean connectors back to the soiled side for storage and re-use. The sliding angle makes sure the connectors are transferred back to the soiled side and that they are available when you need them.

4. CONNECTOR STORAGE BAG

A disposable plastic bag suitable for return and storage of connector holders. To maintain full control of the connector kits, the bag is transparent and has a label for notes. The bag is perforated to allow ventilation

	Art. no.	Description	Size (L x W), mm
1	5618120	Printer holder for wall rail	300 x 300 x 100
2	5618119	Chart holder for wall rail	500 x 300 x 100
3	5618121	Connector holder, right to left (as in picture)	1100 x 350 x 300
3	5618280	Connector holder, left to right	1100 x 350 x 300
4	5618302	Connector storage bags, 400 / pack	330 x 330

Did you know ...

... that in addition to endoscope reprocessors and accessories, Getinge also provides the chemicals and the unique system for handling them? Aperlan Poka-Yoke Agent A & B disinfectant containers can only be placed in one way – the right way.



Disinfection Rooms

A well-equipped and well-thought-through disinfection room is a necessity for every ward facility. Planning of working space and appropriate equipment is essential. The disinfection room should be equipped with a collection point for soiled goods, a hand wash-basin, a flusher-disinfector, and a storage space for clean goods. These four facility features are the four cornerstones for maintaining good working routines for good hygiene. “Clean hands on clean goods” is the overall rule for all working procedures in the disinfection room.

Getinge has designed three typical furniture combinations for disinfection rooms. All of them simplify the planning and installation process, as well as minimize the risk for cross-infection with the help of the four cornerstones.





1. Sink with rim flush

2. Storage shelf for bed pans

3. Wall shelf

4. Wall cabinet
5. Worktop combination

6. Trolley

For more information regarding Getinge’s disinfection room product line,
please contact: system.accessories@getinge.com



BEDPAN STORAGE CABINET

A range of cabinets for storage of bedpans and urine bottles at controlled temperature. Several models and sizes are available, including pass-through versions for separation of soiled and clean areas. The cabinets are made of stainless steel, with a ground and polished finish. Robust stainless steel doors with insulation minimize heat loss. The cabinet is heated by thermostat-controlled electrical elements. Delivery includes mains switch with indicating lamp and 1.5 m cable for connection.

Wall-mounted	Pass-through	Capacity bedpans / bottles	Compartment- ments	Door(s), hinged	Dimensions, mm
561636870	561636878	2 + 2	1	Right	300 x 375 x 600
561636871	561636879	2 + 2	1	Left	300 x 375 x 600
561636872	561636880	4 + 4	2	Right & Left	600 x 375 x 600
561636873	561636881	6 + 4	3	Right & Left	900 x 375 x 600
561636874	561636882	6 + 4	1	Left	300 x 375 x 1400
561636875	561636883	6 + 4	1	Right	300 x 375 x 1400
561636876	561636884	12 + 2	2	Right & Left	600 x 375 x 1400
561636877	561636885	18 + 2	3	Right & Left	900 x 375 x 1400

10 Other application areas

- Dental clinics
- Clinics & practices
- Laboratories

DENTAL CLINICS



1. Sack holder
2. Instrument trolley
3. Spray-gun

4. Inspection lamp
5. Wall shelf
6. Impulse sealer

CLINICS & PRACTICES



- 1. Work chair
- 2. Inspection lamp
- 3. Tape dispenser

- 4. Height adjustable packing table

LABORATORY



- 1. Wall shelf
- 2. Stainless steel sink unit
- 3. Wall cabinet

- 4. Warming cabinet
- 5. Worktable for wet goods



BD INCUBATION CABINETS

BD incubation cabinets are ideal for incubation, with precision temperature control, heating and drying. The temperature range is from 5°C above ambient temperature up to 99.9°C, with interior variation less than $\pm 0.5^\circ\text{C}$ at 37°C working temperature. The frameless inner glass door allows brief visual inspection of cultures with no significant drop in temperature. Two shelves included.

Art. no.	Description	Outer size (WxHxD), mm	Inner size (WxHxD), mm	Volume L	Empty wt, kg	Voltage V	Watts	Max. load, kg	Max # of shelves	Additional shelf, art. no.
560122821	BD 53	634 x 617 x 575	400 x 400 x 330	53	43	230	400	40	4	560 122831
560122822	BD 115	834 x 702 x 645	600 x 480 x 400	115	64	230	400	50	5	560122832
560122823	BD 240	1034 x 822 x 745	800 x 600 x 500	240	104	230	680	70	7	560122833



ED STERILIZING CABINETS

ED sterilizing cabinets comprise hot-air cabinets with natural convection. The temperature range is from 5°C above ambient temperature up to 300°C, with interior variation less than $\pm 2^\circ\text{C}$ at 70°C working temperature ($\pm 4.5^\circ\text{C}$ at 300°C). Two shelves included.

Art. no.	Description	Outer size (WxHxD), mm	Inner size (WxHxD), mm	Volume L	Empty wt, kg	Voltage V	Watts	Max. load, kg	Max # of shelves	Additional shelf, art. no.
560122811	ED 53	634 x 617 x 575	400 x 400 x 330	53	41	230	1200	40	5	560122831
560122812	ED 115	834 x 702 x 645	600 x 480 x 400	115	60	230	1600	50	6	560122832
560122813	ED 240	1034 x 822 x 745	800 x 600 x 500	240	96	230	2700	70	7	560122833



FD WARMING AND STERILIZING CABINETS

FD warming and sterilizing cabinets are hot-air cabinets that use powerful, quiet fan convection, highly suitable for more demanding thermal tasks. The high air exchange rate and the very short heating-up times assure exceptionally fast and intensive drying, especially for materials with high moisture content. These cabinets are also suitable for assisted drying of surgical instruments after washing and disinfection. The interior temperature variation is lower than $\pm 1^\circ\text{C}$ at 70°C working temperature ($\pm 4^\circ\text{C}$ at 300°C). Two shelves included.

Art. no.	Description	Outer size (WxHxD), mm	Inner size (WxHxD), mm	Volume L	Empty wt, kg	Voltage V	Watts	Max. load, kg	Max # of shelves	Additional shelf, art. no.
560122801	FD 53	634 x 617 x 575	400 x 400 x 330	53	46	230	1200	40	5	560122831
560122802	FD 115	834 x 702 x 645	600 x 480 x 400	115	62	230	1600	50	6	560122832
560122803	FD 240	1034 x 822 x 745	800 x 600 x 500	240	98	230	2700	70	7	560122833



E 28 DRYING OVEN

E 28 drying oven, a robust small unit with natural convection and adjustable ventilation. Used for drying or hot air sterilization. Features a mechanical controller. The timer can be set for 0–120 min. or continuous operation. Temperature range: 60 to 230°C Temperature accuracy: $\leq \pm 1.5^\circ\text{C}$ at 70°C. Two shelves included.

Art. no.	Description	Outer size (WxHxD), mm	Inner size (WxHxD), mm	Volume L	Empty wt, kg	Voltage V	Watts	Max. load, kg	Max # of shelves	Additional shelf, art. no.
560122841	E 28	580 x 402 x 425	400 x 280 x 250	28	22	230	800		4	–



AIR COMPRESSOR

Fully automatic oil-free compressor, designed for intermittent operation. Single-stage type, two-cylinder, piston compressor powered by an electric motor and V-belt transmission mounted on air receiver with a 24-liter volume in horizontal performance.

Art. no.	Capacity / pressure (L/min)	Electrical motor power, kW	Compressor speed, rpm	Motor V	Hz	phase	Size (L x W x H) m	Weight kg
561 61 42-01	175 at 7 bar	1.45	1400	220-230	50	1	780 x 310 x 650	40
561 61 42-02	175 at 7 bar	1.45	1400	120	60	1	780 x 310 x 650	40
561 61 42-03	175 at 7 bar	1.45	1400	220-230	60	1	780 x 310 x 650	40



AIR COMPRESSOR

A compact air compressor with a built-in motor for silent operation. The noise level is as low as 50 dB (A). Capacity: 40 L/minute. Weight: 27 kg. The slim design and a low noise level make this air compressor ideal for placement at point-of-use.

Art. no.	Capacity / pressure (L/min)	Electrical motor power, kW	Motor V	Hz	phase	Size (L x W x H) m	Weight kg
561672401	40 at 7 bar	0.34	220-230	50	1	400 x 400 x 640	27
561672402	40 at 7 bar	0.34	120	60	1	400 x 400 x 640	27
561672403	40 at 7 bar	0.34	220-230	60	1	400 x 400 x 640	27



SACK HOLDER, FREE-STANDING

Sack holder designed as a free-standing unit, with a rigid, stainless-steel frame and a protective polystyrene lid that can be removed for disinfection. This makes it ideal for use in heavy-duty areas with high hygienic demands. For convenient depositing of waste, the lid is easily opened by pressing a foot pedal. Four (4) wheels on the bottom plate enable convenient transfer. The sack holder can be used for all types of sacks with volumes of 100–125 liters.

Art. no.	Size (LxWxH), mm
561 60 71-01	360 x 450 x 912

TABLE OF CONTENTS

AIR COMPRESSOR	55	PERFORATED INSTRUMENT TRAY	28
ASSISTANCE & PREPARATION TABLES	44	PH TEST	36
BARREL TROLLEY	40	PRE-CLEANING UNIT	47
BARREL WEDGE	40	PRE-FILTER	35
BASKET RACK	22	PROTECTIVE GLOVES	39
BASKET TROLLEY	31	PROTECTIVE GOGGLES	39
BENCH CABINET	10	RAMP	40
CALIBRATION FLUID	37	REVERSE OSMOSIS	35
CANISTER KEY	39	ROTARY SEALERS	14
CANISTER PUMP	39	SACK HOLDER	55
CHAIR	17	SEALER SERVICE KIT	15
CHEMICAL STORAGE TROLLEY	47	SILICATE TEST	36
CHLORIDE TEST	36	SINK UNIT	9
CLEAN TABLE	47	SPILL PLATFORM	40
CLOSED TRANSPORT TROLLEY	31	SPRAY GUN RINSER	11
CONDUCTIVITY TEST	37	STEREO MAGNIFIERS	18
CUTTING DEVICE	17	STERILIZING CABINETS	54
DISTRIBUTION TROLLEY (DTHC)	30	STORAGE CABINET	23
DISTRIBUTION TROLLEY (DTO)	30	STORAGE SHELF	22
DRAIN AND JOINT KIT	40	STORAGE TROLLEY	47
DRYING OVEN	54	STRENGTH TEST DEVICE	15
ENDOSCOPE BASKET	28	SURGICAL WASHBASIN	44
FAUCETS	9	TABLE TROLLEYS	32
FINE-MESH BASKET	27	TAPE DISPENSER	15
FINE-MESH INSTRUMENT TRAY	27	TOTAL SALINITY TEST	37
FLEXIBLE STORAGE TROLLEYS & ACCESSORIES	29	TOTAL SALINITY TEST CLEANING	37
IDENTIFICATION TAG	31	TRANSPORT TOTE BOX	26
IMPULSE SEALERS	14	ULTRASONIC CABINET	10
INCUBATION CABINETS	54	ULTRASONICS	6-7
INSPECTION LAMP	17	U-SHAPED TRANSFER TABLE	47
INSPECTION & PACKING TABLE	16	WALL CABINET	8
INSTRUMENT FIXATION SYSTEM	28	WALL RAIL	48
INSTRUMENT TRAY	27	WALL SHELF	8
LABEL PRINTER	15	WARMING AND STERILIZING CABINETS	54
LAB TEST	37	WASTE TROLLEY	48
LID FOR SPRI WIRE BASKET	26	WATER HARDNESS TEST	36
LIFT TROLLEY	32	WATER SOFTENERS	35
LINEN INSPECTION & FOLDING TABLE	17	WATER TEST KIT	36
MEASURING BEAKER	39	WIRE BASKET	26
PACKING TABLE	16	WORKTABLE FOR DRY GOODS	16
PAPER-DISPENSING TROLLEY	15	WORKTABLE FOR WET GOODS	10
PASS-THROUGH CABINET	44		



Getinge Infection Control is the world leading provider of solutions for sterile processing in the healthcare sector. We aim to ensure the highest quality and safety at the lowest total cost. We offer complete solutions for a seamless work-flow, reducing the risk of contamination while helping healthcare to increase efficiency.

Getinge Infection Control AB

P O Box 69
SE-305 05 Getinge
SWEDEN
Phone: +46 (0) 10 335 00 00
E-mail: info@getinge.com

GETINGE
GETINGE GROUP

getinge.com

GETINGE GROUP is a leading global provider of products and systems that contribute to quality enhancement and cost efficiency within healthcare and life sciences. We operate under the three brands of ArjoHuntleigh, GETINGE and MAQUET. **ArjoHuntleigh** focuses on patient mobility and wound management solutions. **GETINGE** provides solutions for infection control within healthcare and contamination prevention within life sciences. **MAQUET** specializes in solutions, therapies and products for surgical interventions, interventional cardiology and intensive care.