

**Prepared For:**

Winslow Gerolamy Motors Ltd.  
Steve Gerolamy  
1018 Lansdowne St.  
Peterborough, ON K9J 6Y5  
(705)742 - 3411  
Reference ID: DEMO #129

**Presented By:**

WINSLOW GEROLAMY MOTORS  
Steve Gerolamy  
1018 LANSDOWNE ST. W.  
PETERBOROUGH ON K9J 6Y5  
(705)742-3411

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

**DEMO # 129**



**Model Profile**

**2014 7600 SFA 6X4 2010 (SF567)**

**APPLICATION:** Front Plow and Wing with Spreader  
**MISSION:** Requested GVWR: 66000. Calc. GVWR: 60000  
 Calc. Start / Grade Ability: 29.60% / 2.66% @ 55 MPH  
**DIMENSION:** Wheelbase: 217.00, CA: 133.50, Axle to Frame: 79.00  
**ENGINE, DIESEL:** {MaxxForce 13} EPA 10, 430 HP @ 1700 RPM, 1550 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 430 Peak HP (Max)  
**TRANSMISSION, MANUAL:** {Eaton Fuller UltraShift+ FOM-15E310C-VAS} 10-Speed Fully Automated Manual; with Aluminum Clutch Housing, Overdrive, Electronic Shift Controls, Electric Clutch Actuation, Air Range Shift, Internal Lube Oil Pump, External Oil Filter, Hill Start Aid  
**CLUTCH:** {Eaton Fuller ECA-1850} Two-Plate, Ceramic, 7-Spring with Pre-Damper, 15.5" Diameter, with Adjustment-Free Feature, 1850 lb-ft Torque Capacity  
**AXLE, FRONT NON-DRIVING:** {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity  
**AXLE, REAR, TANDEM:** {Meritor MT-40-14X-4DCR-P} Single Reduction, 0.433"(11mm) Wall Housing Thickness, 40,000-lb Capacity, R Wheel Ends, Lube Pump, With Driver Controlled Locking Differential in Forward Rear and Rear Rear Axle Gear Ratio: 4.33  
**CAB:** Conventional  
**TIRE, FRONT:** (2) 425/65R22.5 XZY-3 (MICHELIN) 465 rev/mile, load range L, 20 ply  
**TIRE, REAR:** (8) 11R22.5 XDE M/S (MICHELIN) 497 rev/mile, load range H, 16 ply  
**SUSPENSION, REAR, TANDEM:** {Hendrickson HMX-460-60} Walking Beam Type 60" Axle Spacing; 46,000-lb Capacity, With Rubber End Bushings, Transverse Torque Rods, Less Shock Absorbers  
**FRAME REINFORCEMENT:** Outer "C" Channel, Heat Treated Alloy Steel (120,000 PSI Yield); 10.813" x 3.892" x 0.312"; (274.6mm x 98.9mm x 8.0mm); 480.0" (12192mm) Maximum OAL  
**PAINT:** Cab schematic 100GR  
 Location 1: 2303, Red (Std)  
 Chassis schematic 936GR  
 Frame: 0001, Canyon Black (Std)

<u>Code</u>	<u>Description</u>
SF56700	Base Chassis, Model 7600 SFA 6X4 2010 with 217.00 Wheelbase, 133.50 CA, and 79.00 Axle to Frame.
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL
1GBP	FRAME REINFORCEMENT Outer "C" Channel, Heat Treated Alloy Steel (120,000 PSI Yield); 10.813" x 3.892" x 0.312"; (274.6mm x 98.9mm x 8.0mm); 480.0" (12192mm) Maximum OAL
1LLA	BUMPER, FRONT Steel, Swept Back  <u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color
1WDT	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille, With Outer "C" Channel Reinforcement
1WTX	WHEELBASE RANGE 199" (505cm) Through and Including 264" (670cm)
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity  <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
3708	SHOCK ABSORBERS, FRONT
3ACS	SUSPENSION, FRONT, SPRING Multileaf, Shackle Type, Single Stage Spring; 20,000-lb Capacity; Less Shock Absorbers  <u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free  <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications  <u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : DUST SHIELDS, FRONT BRAKE : DUST SHIELDS, REAR BRAKE : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4  <u>Notes</u> : Rear Axle is Limited to 46,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle /Suspension Ordered.
4193	BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 SqIn Long Stroke Brake Chambers  <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
4619	TRAILER CONNECTIONS Four-Wheel, With Hand Control Valve and Tractor Protection Valve, for Straight Truck
4732	DRAIN VALVE {Berg} Manual; With Pull Chain, for Air Tank

<u>Code</u>	<u>Description</u>
4AZJ	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel) With Automatic Traction Control
4EBS	AIR DRYER {Bendix AD-9} With Heater  <u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab
4ETE	BRAKE CHAMBERS, FRONT AXLE {Haldex} 24 SqIn
4EVL	BRAKE CHAMBERS, REAR AXLE {Haldex GC3030LHDHO} 30/30 Spring Brake  <u>Includes</u> : BRAKE CHAMBERS, SPRING (2) Rear Parking; WITH TRUCK BRAKES: All 4x2, 4x4; WITH TRACTOR BRAKES: All 4x2, 4x4; 6x4 & 6x6 with Rear Tandem Axles Less Than 46,000-lb. or GVWR Less Than 54,000-lb. : BRAKE CHAMBERS, SPRING (4) Rear Parking; WITH TRUCK BRAKES: All 6x4, 6x6; WITH TRACTOR BRAKES: 6x4 & 6x6 with Rear Tandem Axles 46,000-lb. or Greater or GVWR of 54,000-lb. or Greater
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq. In. Long Stroke Brake Chamber and Spring Actuated Parking Brake  <u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
4SPM	AIR COMPRESSOR {Bendix} 15.9 CFM Capacity, Single Cylinder
4VDX	AIR TANK LOCATION (2) : Two Mounted Outside Right Rail, Under Cab, On Step Mounting Brackets  <u>Notes</u> : This air tank location reduces ground clearance by 2" vs. the standard air tank location. : Use Air Tank Location Code 04VDX with Exhaust Code 07BEJ and Battery Box Code 08WGE or 08WGG to provide clean CA.
5710	STEERING COLUMN Tilting and Telescoping
5CAL	STEERING WHEEL 2-Spoke, 18" Diam., Black
5PTB	STEERING GEAR (2) {Sheppard M-100/M-80} Dual Power
7BEJ	EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Outside Right Rail Under Cab; Includes Vertical Tail Pipe and Guard  <u>Includes</u> : EXHAUST HEIGHT 10' Exhaust Height - Based on Empty Chassis with Standard Components (+ or - 1" Height) : MUFFLER/TAIL PIPE GUARD Non-Bright Finish
7SDA	ENGINE COMPRESSION BRAKE {MaxxFORCE} by Jacobs; for MaxxFORCE 11 & 13 Engines, With Selector Switch and On/Off Switch
7WBA	TAIL PIPE (1) Turnback Type, Bright, for Single Exhaust
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel
7WCR	EXHAUST HEIGHT 10' 11"
7WZY	SWITCH, FOR EXHAUST 2 Position, Lighted & Latching, ON/OFF Type, Mounted in IP, Inhibits Diesel Particulate Filter Regeneration as Long as Switch is in ON Position
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment  <u>Includes</u> : BATTERY BOX Steel with Plastic Lid : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab

<u>Code</u>	<u>Description</u>
	: FUSES, ELECTRICAL SAE Blade-Type
	: HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels
	: HORN, ELECTRIC Single
	: JUMP START STUD Located on Positive Terminal of Outermost Battery
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: RUNNING LIGHT (2) Daytime, Included With Headlights
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8518	CIGAR LIGHTER Includes Ash Cup
8695	SNOW SHIELD (2) Chrome; for Dual Air Horns
8875	BATTERY TERMINALS Sealed
8GGN	ALTERNATOR {Bosch LH160} Brush Type, 12 Volt 160 Amp. Capacity, Pad Mount
8HAU	BODY BUILDER WIRING INSIDE CAB; Includes Sealed Connectors for Tail/Amber, Turn/Marker/Backup/Accessory, Power/Ground, and Stop/Turn
8MKX	BATTERY SYSTEM {International} Maintenance-Free (3) 12-Volt 2775CCA Total
8RGA	2-WAY RADIO Wiring Effects; Wiring With 20 Amp Fuse Protection, Includes Ignition Wire With 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab
8RJU	RADIO {International} AM/FM Stereo With CD Player, Weatherband, Clock, Auxiliary Input, Includes Multiple Speakers
	<u>Includes</u>
	: SPEAKERS IN CAB (2) Coaxial with Deluxe Interior
	: SPEAKERS IN CAB (4) Coaxial with Premium Interior
8THB	BACK-UP ALARM Electric, 102 dBA
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8TKB	STOP, TURN, TAIL & B/U LIGHTS {Truck Lite} Super 44, With LED Bulbs for Stop, Turn & Tail Lights and Truck Lite Super 40 for Backup lights, With Power Module, "International" Termination and Less Junction Box
8TMG	TRAILER CONNECTION SOCKET 7-Way; Mounted at rear of Frame, Wired for Turn Signals Combined With Stop, Compatible With Trailers That Use Combined Stop, Tail, Turn Lamps
8VZR	SWITCH, BODY CIRCUITS, MID for Bodybuilder, 6 Momentary Switches in Instrument Panel; One Power Module with 6 Channels, 20 Amp Max. Per Channel, 80 Amp Max Output, Switches Control Power Module Through Multiplex Wiring, Mounted in Cab Behind Driver Seat
8WGG	BATTERY BOX Steel, With Aluminum Cover, 3 Battery Capacity, Mounted Right Side Under Cab Below Frame Mounted Exhaust, Provides Clean CA
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time
8WJV	BATTERY DISCONNECT SWITCH {Joseph Pollak} for Cab Power Disconnect Switch; Lever Operated, Disconnects Power to PDC, Does Not Disconnect Charging Circuits, Cab Mounted

<u>Code</u>	<u>Description</u>
8WLK	TURN SIGNALS, FRONT Dual Face, Amber/Amber, Mounted on Top of Fender, Used With Standard Flush Mounted Front Turn Signal, Side Marker Lamps, Parking Lights and Reflectors
8WML	HEADLIGHTS Long Life Halogen; for Two Light System
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on
8WVP	HORN, AIR (2) Single Tone, Rectangular; Chrome
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, With Ignition "OFF" and any Door Opened
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start
	<u>Notes</u> : This starter is designed to work reliably without the need for thermal overcrank protection and provides the same warranty coverage as starters with thermal overcrank protection.
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses
9585	FENDER EXTENSIONS Rubber
9ANG	HOOD, HATCH (01) for Servicing
9HAN	INSULATION, UNDER HOOD for Sound Abatement
9HBM	GRILLE Stationary, Chrome
9HBN	INSULATION, SPLASH PANELS for Sound Abatement
9WAC	BUG SCREEN Front End; Mounted Behind Grille
9WBK	FRONT END Tilting, Fiberglass, With Three Piece Construction Includes Long Hood
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GR"
10636	PAINT IDENTITY, PT-2 Single Color, Instruction No. 936. Frame/Running Gear, Less Fuel Tanks
	<u>Includes</u> : NOTE: Battery Box, Air Tanks, Fuel Tanks, Steps and Straps NOT Painted
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10WJH	PROMOTIONAL PACKAGE Government and Municipal Silver Package; Two Year Limited Subscription of On-Command Service Information (Formerly Fleet ISIS), and On-Command Parts Information (Formerly Fleet Parts Catalog), Requires Specific Feature Combinations
11MGP	CLUTCH {Eaton Fuller ECA-1850} Two-Plate, Ceramic, 7-Spring with Pre-Damper, 15.5" Diameter, with Adjustment-Free Feature, 1850 lb-ft Torque Capacity
	<u>Includes</u> : CLUTCH RELEASE BEARING Greasable
12854	PTO EFFECTS, ENGINE FRONT for MaxxFace 11 and 13 Engines, Less PTO Unit, Includes Adapter Plate on Engine Front Mounted
12864	BLOCK HEATER, ENGINE {Phillips} 120 Volt/1500 Watt
	<u>Includes</u>


<u>Code</u>	<u>Description</u>
	: BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door
12BAV	ENGINE, DIESEL {MaxxForce 13} EPA 10, 430 HP @ 1700 RPM, 1550 lb-ft Torque @ 1000 RPM, 2100 RPM Governed Speed, 430 Peak HP (Max)
	<u>Includes</u>
	: AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated (Air Brake Chassis Only)
	: ANTI-FREEZE Yellow Shell Rotella Extended Life Coolant; -40 Degrees F/ -40 Degrees C; for MaxxForce 2010 Engines
	: COLD STARTING EQUIPMENT Automatic; With Engine ECM Control
	: CRUISE CONTROL Electronic; Controls Integral to Steering Wheel
	: ENGINE BLOCK Compacted Graphite Iron
	: ENGINE SHUTDOWN Electric, Key Operated
	: FUEL FILTER Top Access, Cartridge Type Filter Element; Engine Mounted
	: FUEL SYSTEM High Pressure Common Rail
	: GOVERNOR Electronic
	: HEAT MANAGEMENT SYSTEM Eco-Therm
	: OIL FILTER, ENGINE Drop-In Cartridge Type
	: OIL PAN Laminate Steel Composite
	: TURBO Twin Series
	: WET TYPE CYLINDER SLEEVES
12THT	FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed With Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u>
	: FAN Nylon
12UBL	RADIATOR Aluminum; Welded, Front to Back CrossFlow System, 1593 SqIn, 1929 SqIn Dual CAC, 1548 SqIn 3 Core LTR
	<u>Includes</u>
	: DEAERATION SYSTEM with Clear Fill/Surge Tank
	: HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps
	: RADIATOR HOSES Premium, Rubber
12UXH	FEDERAL EMISSIONS for 2010; MaxxForce 13 Engines
12VAL	AIR CLEANER Dual Element, with Integral Snow Valve and In-Cab Control
	<u>Includes</u>
	: GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted
12VYL	ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use
12WBR	FAN OVERRIDE Manual; With Electric Switch on Instrument Panel, (Fan On With Switch On)
12WEG	COLD STARTING EQUIPMENT Automatic; With Engine ECM Control
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted
12WUA	COOLANT FILTER for 2010 MaxxForce 11 and 13 Engines
12XAN	OBD COMPLIANCE for 2013 OBD
13GVG	TRANSMISSION, MANUAL {Eaton Fuller UltraShift+ FOM-15E310C-VAS} 10-Speed Fully Automated Manual; with Aluminum Clutch Housing, Overdrive, Electronic Shift Controls, Electric Clutch Actuation, Air Range Shift, Internal Lube Oil Pump, External Oil Filter, Hill Start Aid
13WAN	OIL COOLER, MANUAL TRANSMISSION Air to Oil Type, for International, Fuller, Meritor or Spicer Transmission, Mounted on Radiator, (REQUIRES TRANSMISSION LUBE PUMP)
13WLB	TRANSMISSION OIL {EmGard 50W} Synthetic; 22 thru 33.99 Pints

<u>Code</u>	<u>Description</u>
14GVL	<p>AXLE, REAR, TANDEM {Meritor MT-40-14X-4DCR-P} Single Reduction, 0.433"(11mm) Wall Housing Thickness, 40,000-lb Capacity, R Wheel Ends, Lube Pump, With Driver Controlled Locking Differential in Forward Rear and Rear Rear Axle . Gear Ratio: 4.33</p> <p><u>Includes</u>            : POWER DIVIDER LOCK Electric over Air Operated, Cab Control with Indicator Light            : REAR AXLE DRAIN PLUG (2) Magnetic, For Tandem Rear Axle</p> <p><u>Notes</u>            : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.</p>
14ULZ	<p>SUSPENSION, REAR, TANDEM {Hendrickson HMX-460-60} Walking Beam Type 60" Axle Spacing; 46,000-lb Capacity, With Rubber End Bushings, Transverse Torque Rods, Less Shock Absorbers</p> <p><u>Includes</u>            : CROSSMEMBER, SUSPENSION Stamped Steel Double Dogbone</p> <p><u>Notes</u>            : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.</p>
14WAL	SUSPENSION/REAR-AXLE IDENTITY for Meritor Tandem Rear Axles With Bar-Pin Beam Attachment Type Suspensions
14WBV	SHOCK ABSORBERS, REAR (4) for Hendrickson HMX Suspension Only, Mounted from Frame to Beam
14WLD	AXLE, REAR, LUBE {EmGard 75W-90} Synthetic Oil; 50 thru 64.99 Pints
15924	FUEL TANK STRAPS Bright Finish Stainless Steel
15LKW	FUEL/WATER SEPARATOR {Davco Fuel Pro 382} with Fuel Heated Fuel Heater, Thermostatic Fuel Temperature Control, Mounted In Standard Position, Includes Water-In-Fuel Light
15SET	FUEL TANK Top Draw; D Style, Non Polished Aluminum, 100 U.S. Gal., 378.5 L Capacity, 23.0" Tank Depth, Mounted Left Side Under Cab
16030	CAB Conventional
	<p><u>Includes</u>            : ARM REST (2) Molded Plastic; One Each Door            : CLEARANCE/MARKER LIGHTS (5) Flush Mounted            : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window            : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel            : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted            : GLASS, ALL WINDOWS Tinted            : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side            : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side            : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color            : STEP (4) Two Steps Per Door</p>
16GHX	HEATER SHUT-OFF VALVES (1) Gate Valve Type
16HBB	GUAGE CLUSTER English With Metric Electronic Speedometer
	<p><u>Includes</u>            : GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level            : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout            : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)</p> <p><u>Notes</u></p>

<u>Code</u>	<u>Description</u>
	: Standard in Canada
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} With Black Bezel Mounted in Instrument Panel
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16JNV	SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Cloth, Isolator, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, -3 to +14 Degree Back Angle Adjust
	<u>Includes</u>
	: SEAT BELT 3-Point, Lap and Shoulder Belt Type
16PJU	SEAT, PASSENGER {Gra-Mag} Non Suspension, High Back With Integral Headrest, Cloth, With Fixed Back, With Under Seat Storage
	<u>Includes</u>
	: SEAT BELT 3-Point, Lap and Shoulder Belt Type
16SDG	MIRROR, CONVEX, LOOK DOWN {Lang Mekra} Right Side; 6" x 10 1/4", With Bright Finish
16SDU	MIRRORS (2) {Lang Mekra} Styled; Rectangular, 7.09" x 15.75" & Integral Convex Both Sides, 102" Inside Spacing, Breakaway Type, Heated Heads Thermostatically Controlled, Power Both Sides, Clearance Lights LED, Bright Finish Heads & Brackets
16SEE	GRAB HANDLE Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar
16VSL	WINDSHIELD Heated, Single Piece
16WBY	ARM REST, RIGHT, DRIVER SEAT
16WCT	AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster
	<u>Includes</u>
	: HEATER HOSES Premium
	: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps
	: REFRIGERANT Hydrofluorocarbon HFC-134A
16WJS	INSTRUMENT PANEL Center Section, Flat Panel
16WJU	WINDOW, POWER (2) And Power Door Locks, Left and Right Doors, Includes Express Down Feature
16WKY	HVAC FRESH AIR FILTER
16WLS	FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood
16WRZ	CAB INTERIOR TRIM Premium
	<u>Includes</u>
	: "A" PILLAR COVER Molded Plastic
	: CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering
	: CAB SOUND INSULATION Includes Dash Insulator and Engine Cover Insulator, Premium Floormat, and Sound Dampening Patches
	: CAB, INTERIOR TRIM, CLOSEOUT Lower Dash Closeout Panel; Molded Plastic; Under Instrument Panel Driver Side
	: CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights
	: COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side
	: DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors
	: FLOOR COVERING Rubber, Black
	: GAUGE, TEMPERATURE, AMBIENT Includes Compass Readout and Wiring and Sensor With Display Unit Mounted in Cluster
	: HEADLINER Soft Padded Cloth



<u>Code</u>	<u>Description</u>
	: INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors : SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side
16WSK	CAB REAR SUSPENSION Air Bag Type
16XWD	SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color; Includes Integral Clearance/Marker Lights
16XWJ	WINDSHIELD WIPER BLADES Snow Type
27DNP	WHEELS, FRONT DISC; 22.5" Painted Steel, 10-Stud (285.75MM BC) Hub Piloted, 5 Hand Hole, Flanged Nut, Metric Mount, 12.25 DC Rims; With Steel Hubs, with 5.375" Offset
	<u>Includes</u> : PAINT IDENTITY, FRONT WHEELS White
	<u>Notes</u> : Compatible Tire Sizes: 385/65R22.5, 425/65R22.5
28DRN	WHEELS, REAR DUAL DISC; 22.5" Painted Steel, 5 Hand Hole, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With .472" Thick Increased Capacity Disc and Steel Hubs
	<u>Includes</u> : PAINT IDENTITY, REAR WHEELS White
	<u>Notes</u> : Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5
29PAR	PAINT IDENTITY, FRONT WHEELS {Accuride} Disc Front Wheels; With Vendor Applied (PKWHT21) White Powder Coat Paint
29PAS	PAINT IDENTITY, REAR WHEELS {Accuride} Disc Rear Wheels; With Vendor Applied (PKWHT21) White Powder Coat Paint
29WLA	WHEEL BEARING, FRONT, LUBE {EmGard 50W} Synthetic Oil
7452133217	(8) TIRE, REAR 11R22.5 XDE M/S (MICHELIN) 497 rev/mile, load range H, 16 ply
7652663208	(2) TIRE, FRONT 425/65R22.5 XZY-3 (MICHELIN) 465 rev/mile, load range L, 20 ply
1	VIKING CIVES PLOW EQUIPMENT AS PER QUOTE # BT11-028 Viking VCL500T Tilt Front Harness, VCL350SCL Rear Wing Tower, Dowty Tandem "dry mode pump", Viking Proline 1415HWHT All Season Dump Spreader Body, High Tensile Steel, FORCE AMERICA SSC1100 Spreader Controls, PH200 Pintle hook with glad hands, Aluminum Full Fenders that raise with body, VCL120HSE9 One way front plow, VCL144WHD 12' Snow wing with steel blades. Quick detach Aluminium Full Fenders that raise with Dump Body
	AIR CONDITIONING TAX
	First Aid , 2 1/2 lbs. Fire Ext. Triangle Kit
	Floor Mats (4000 series)
	ONTARIO TIRE TAX (10) TIRES
	SERVICE MANUAL "CD ROM"
	BRAKE STROKE INDICATORS ON 3 AXLES

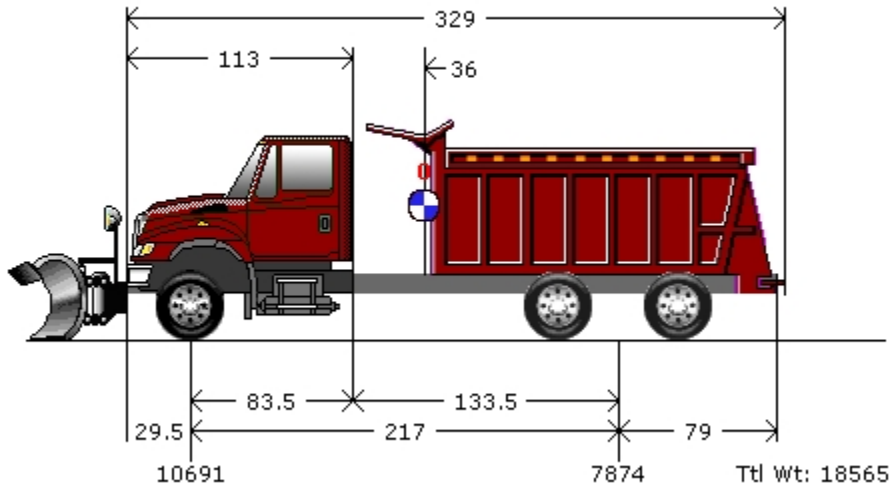

Graphics are provided as visual aids only and are not intended to represent the actual scale, shape, or color of the truck or its components. All weights are represented in lbs.

Truck			Body/Trailer			Chassis/Empty Weights	
Bumper to Axle	(BA)	29.5	Body Length	(BL)	180	Tractor Front Axle:	9,472
Wheelbase	(WB)	113.00				Tractor Rear Axle:	8,092
Axle to Frame	(AF)	79.00					
Axle to Back Cab	(ABC)	83.5					
Cab to Axle	(CA)	133.5					
Usable CA		133.5					
CA Reduction Adjustment		0					
Fuel-Diesel(Gals)		0					
DEF(Gals)		0					

Before the Cab			Cab			Payloads			Body			After the Body		
#	Weight	CG	#	Weight	CG	#	Weight	CG	#	Weight	CG	#	Weight	CG
									1	0	0			

Loads	
Payload Weight:	0
Driver:	0
Fuel-Diesel(Lbs):	0
DEF(Lbs):	0
Snow Plow:	1,000

Weight Distribution	
Total Front Axle:	10,691
Total Rear Axle:	7,874
Total Weight:	18,565

Weights and clearances in this proposal are estimates only. Navistar, Inc. is not liable for any consequences resulting from any differences between the estimated weights and clearances and the actual manufactured weights and clearances.

**Weight Distribution**

All weights are represented in lbs.

	<u>Truck</u>		
	Front	Rear	Total
<b><u>Chassis Weight</u></b>			
Chassis Weight:	9,472	8,092	<b>17,564</b>
Fuel:	0	0	<b>0</b>
DEF:	0	0	<b>0</b>
Empty Body:	0	1	<b>1</b>
<b>(Curb Weight):</b>	<b>9,472</b>	<b>8,093</b>	<b>17,565</b>

**Loads**

Payloads:	0	0	<b>0</b>
Driver:	0	0	<b>0</b>

**Accessories**

Snow Plow:	1,219	-219	<b>1,000</b>
------------	-------	------	--------------

**Axle Totals (Gross Weight):** 10,691   7,874   18,565

**Weight Ratings**


	<u>Truck</u>	
	Front	Rear
Axle(axle capacity)	20,000	40,000
Tire(tire capacity)	22,800	48,040
Suspension(suspension capacity)	20,000	46,000
Spring:	0	
<b>Wheel Combination</b>	<b>Load</b>	<b>Limit</b>

1 - 3                      18,565      N/A

Maximum Gross Vehicle Weight Rating (GVWR) 60,000 - Gross Vehicle Weight(GVW) 18,565 = 41,435 Reserves

**Weight Summary**

\* Distributed weights are within capacity limits

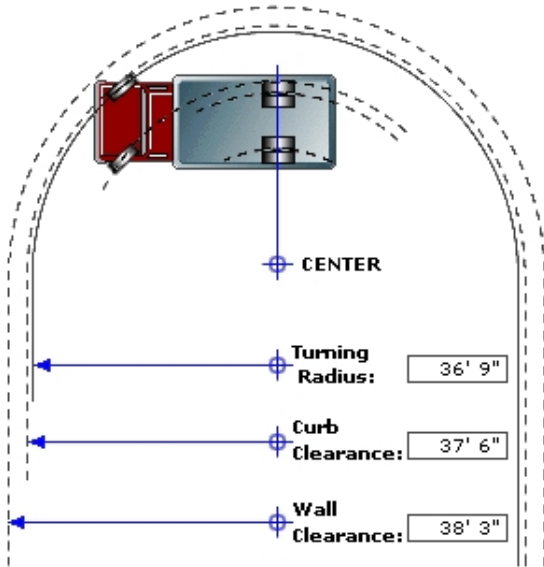

Series: 7000  
 Model: SF567  
 Description: 7600 SFA 6X4 2010  
 Model Year: 2014

**Calculation Factors**

Wheelbase: 217  
 Front Axle: 0002ARY  
 Description: AXLE, FRONT NON-DRIVING, {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity  
 Front Wheel: 0027DNP  
 Description: WHEELS, FRONT, DISC; 22.5" Painted Steel, 10-Stud (285.75MM BC) Hub Piloted, 5 Hand Hole, Flanged Nut, Metric Mount, 12.25 DC Rims; With Steel Hubs, with 5.375" Offset  
 Front Tire: 07652663208  
 Description: TIRES, 425/65R22.5 XZY-3 (MICHELIN) 465 rev/mile, load range L, 20 ply  
 Steering Gear: 0005PTB  
 Description: STEERING GEAR, (2) {Sheppard M-100/M-80} Dual Power

**Turning Radius Statistics**

General Information


Inside Turn Angle: 35 Degrees  
 Radial Overhang: 18

Axle Information

KingPin Inclination: 6.25 Degrees  
 KingPin Center: 71

**Turning Radius - Curb View**

C - Curb Contact Length: 16.92  
 CI - Curb Clearance Increment: 8.62  
 CR - Curb Clearance Radius: 37'6"  
 CH - Curb Height: 6"  
 TR - Turning Radius: 36'9"  
 TW - Tire Width: 16.60

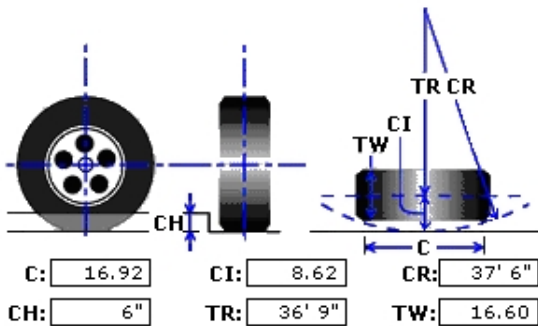

\* All Measurements are in inches, unless otherwise specified.

This information is based on engineering information available at this time. Actual figures may vary. Navistar, Inc. cannot accept liability for consequences due to this variance.

(CANADIAN DOLLAR)

Description

Price

VIKING CIVES PLOW EQUIPMENT AS PER QUOTE # BT11-028

\$0.00

Viking VCL500T Tilt Front Harness, VCL350SCL Rear Wing Tower, Dowty Tandem "dry mode pump", Viking Proline 1415HWHT All Season Dump Spreader Body, High Tensile Steel, FORCE AMERICA SSC1100 Spreader Controls, PH200 Pintle hook with glad hands, Aluminum Full Fenders that raise with body, VCL120HSE9 One way front plow, VCL144WHD 12' Snow wing with steel blades. Quick detach Aluminium Full Fenders that raise with Dump Body

Total Body Allied/Equipment: \$0.00