

PRODUCTS 2011

VALID FROM JANUARY 01, 2011



NEW DIMENSIONS
IN NONINVASIVE
PATIENT MONITORING



sentec

IMAGINE THE POSSIBILITIES!

WELCOME

CONTENT

SDMS

SenTec Digital Monitoring System (SDMS)	4/5
Starter Set	6
SenTec Digital Monitor	7
V-Sign™ Sensor 2	8
Digital Sensor Adapter Cable	8
SpO2 Soft Sensor	9
SpO2 Adapter Cable	9

DISPOSABLES

Ear Clip for mature, intact skin	10
Multi-Site Attachment Ring for sensitive, fragile skin	10
Multi-Site Attachment Ring for mature, intact skin	10
Contact Gel	11
Service Gas	11
V-Sign™ Membrane Changer	12
V-Sign™ Membrane Changer Insert	12
V-Sign™ Membrane Changer Set	12

DATA MANAGEMENT / REMOTE MONITORING

V-STATS™ Installation CD	13
V-CareNeT™ Package Registration Code	13
Data Management Accessories	14

MANUALS




Quick Reference Guide for «SDMS»	15
Instruction Manual for «SDMS»	15
User Manuals CD	15

CABLES/INTERFACING

PSG Adapter Cables Demo Set	16
PSG Adapter Cable universal	16
Nurse Call Cable universal	17
VueLink Adapter	17

ACCESSORIES

V-Sign™ Training Set	18
«SDMS» Carry Bag	18
Clothing Clip for Sensor Cable	19
Cable Cleat & Bin for Disposables	19
Roll Stand	20
Wall Mount Bracket	20
Mounting Plate for infusion stands and wall railings	21
Mounting Plate for wall railings	21
Mounting Plate for Roll Stand Heads	21
Potential Equilization Cable	22

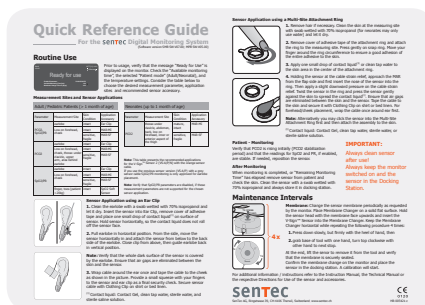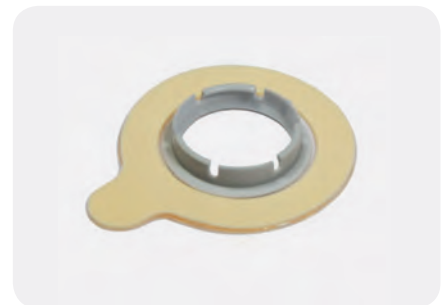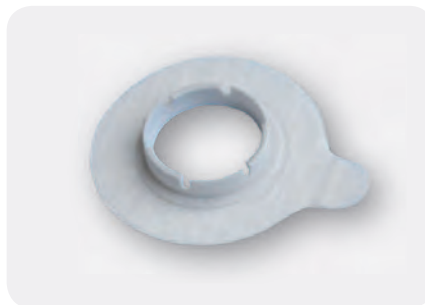

SENTEC DIGITAL MONITORING SYSTEM (SDMS)

PRODUCT CODES: «SDMS», «SDMS-N», «SDMS_nG», or «SDMS-N_nG»

PATIENT MONITORING SYSTEM

| 5

For details on contained items see corresponding Product Codes

- 1 SenTec Digital Monitor (SDM) with current firmware version
- 1 V-Sign™ Sensor (VS-A/P/N)
- 1 Digital Sensor Adapter Cable (AC-150)
- 1 V-STATS™ Installation CD (V-STATS_CD)
- 1 Starter Set (see table below)
- 1 V-Sign™ Training Set (VS-TSET)
- 1 User Manual CD (UMCD) also containing training videos
- 1 Quick Reference Guide (QRG-xx)
- 1 Instruction Manual (IM-xx)

Depending on the Product Code used one of the four available «Starter Sets» will be shipped:

Product Code used	Starter Set to be shipped	Comment
SDMS	VS-SSET	Standard Starter Set (with 1 bottle Service Gas)
SDMS-N	VS-SSET-N	Neonatal Starter Set (with 1 bottle Service Gas)
SDMS_nG	VS-SSET_nG	Standard Starter Set (without Service Gas)
SDMS-N_nG	VS-SSET-N_nG	Neonatal Starter Set (without Service Gas)

NOTE:

- «SDMS» and «SDMS-N» each contain 1 bottle «Service Gas» (a pressurized container) and therefore are considered as dangerous goods when shipped. Costs related to handling of dangerous goods during shipment (in particular for air freight) may arise.
- Gas bottles are pressurized containers. «SDMS», «SDMS-N», and «GAS-0812» therefore are considered as dangerous goods. «GAS-0812» contains 6 gas bottles whereas «SDMS» or «SDMS-N» contain only 1 gas bottle. The costs **per** gas bottle that are related to handling of dangerous goods during shipment (in particular for air freight) therefore are higher when ordering 1 «SDMS» or 1 «SDMS-N» as compared to ordering 1 «SDMS_nG» **and** 1 «GAS-0812» or 1 «SDMS-N_nG» **and** 1 «GAS-0812», respectively.

STARTER SET

PRODUCT CODES: «VS-SSET», «VS-SSET-N», «VS-SSET_nG», or «VS-SSET-N_nG»


6 |



Ear Clip (EC-MI)
for mature, intact skin



Multi-Site Attachment Ring (MAR-MI)
for mature, intact skin

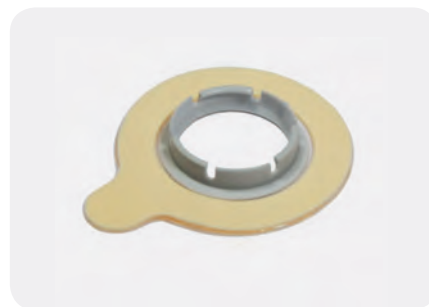

Multi-Site Attachment Ring (MAR-SF)
for sensitive, fragile skin



Contact Gel (GEL-04)



V-Sign™ Membrane Changer (VS-MC)



Service Gas (GAS-0812)

SET OF DISPOSABLES, COVERING APPROXIMATELY ONE MONTH'S NEED

Four different «Starter Set» configurations are available (quantities indicate number of individual items):

Product Code	Standard Starter Set		Neonatal Starter Set	
	VS-SSET	VS-SSET_nG	VS-SSET-N	VS-SSET-N_nG
Ear Clips (EC-MI)	12	12	-	-
Multi-Site Attachment Rings (MAR-MI)	12	12	8	8
Multi-Site Attachment Rings (MAR-SF)	4	4	16	16
V-Sign™ Membrane Changer (VS-MC)	2	2	2	2
Contact Gel (GEL-04)	1	1	1	1
Service Gas (GAS-0812)	1	-	1	-

NOTE:

- «VS-SSET» and «VS-SSET-N» each contain 1 bottle «Service Gas» (a pressurized container) and therefore are considered as dangerous goods. Costs related to handling of dangerous goods during shipment (in particular for air freight) may arise.
- Gas bottles are pressurized containers. «VS-SSET», «VS-SSET-N», and «GAS-0812» therefore are considered as dangerous goods. «GAS-0812» contains 6 gas bottles whereas «VS-SSET» or «VS-SSET-N» contain only 1 gas bottle. The costs per gas bottle that are related to handling of dangerous goods during shipment (in particular for air freight) therefore are higher when ordering 1 «VS-SSET» or 1 «VS-SSET-N» as compared to ordering 1 «VS-SSET_nG» and 1 «GAS-0812» or 1 «VS-SSET-N_nG» and 1 «GAS-0812», respectively.



SENTEC DIGITAL MONITOR

PRODUCT CODE: «SDM»

| 7



STAND-ALONE PATIENT MONITOR WITH INTEGRATED CALIBRATION CHAMBER

- For display of data measured with SenTec Sensors
- Physical characteristics:
 - Weight: 2.5 kg (5.5 lbs) – including gas cylinder
 - Size: 10.2 cm x 27.0 cm x 23.0 cm (4.00" x 10.63" x 9.06")
 - Flip feet serving as carrying handle or to adjust angle for improved table-top viewing
 - Mountable on roll/infusion stands, wall mounts/railings, transport incubators, etc.
- Interfaces:
 - Serial Output (RS-/EIA-232): Supported protocols: SenTecLink, Philips VueLink and/or Philips IntelliBridge, Spacelabs Flexport, Serial Printer, TCB (TransCutaneous Basic Protocol to connect e.g. to Dräger Monitoring)
 - LAN Port (UDP - RFC 768): Required for Remote Monitoring with V-CareNet™
 - Analog output (0-1 V): PCO2, SpO2, PR, Pleth Wave (selectable ranges)
 - Nurse-call capability
- TFT Color Display (LED backlight)
- Non volatile FLASH memory with capacity (monitoring data) of up to 227 hours (9.5 days)¹
- Rechargeable, sealed Lilon Battery with capacity of up to 16 hours²
- Includes mains power cord
- Shipped with current firmware version

NOTE:

- Above-mentioned features depend on Firmware Version of the «SDM»

¹ At 8-seconds resolution (34 hours at 1-second resolution)

² If Sleep Mode=ON

V-SIGN™ SENSOR 2

PRODUCT CODE: «VS-A/P/N»

8 |



CARBON DIOXIDE TENSION AND OXYGEN SATURATION SENSOR

- Digital Sensor
- Noninvasive and continuous measurement of transcutaneous carbon dioxide partial pressure (tcPCO2) and pulse oximetry (SpO2, PR)
- Suitable for adult, pediatric, and neonatal patients
- Reusable, waterproof
- To be attached to the patient with Ear Clip, «MAR-MI» or «MAR-SF»
- Includes 1 single Clothing Clip (SC-CC)
- To be connected to the «SDM» with a «Digital Sensor Adapter Cable» (AC-XXX)

NOTE:

- Requires «SDM» firmware version SMB V07.00 / MPB V05.00 or newer

DIGITAL SENSOR ADAPTER CABLE

PRODUCT CODE: «AC-XXX»



ADAPTER CABLE REQUIRED TO CONNECT V-SIGN™ SENSORS TO THE SENTEC DIGITAL MONITOR (SDM)

Product Code	Product: Digital Sensor Adapter Cable
AC-150	Length = 150 cm / 59.1 "
AC-250	Length = 250 cm / 98.4 "
AC-750	Length = 750 cm / 295.3 "
AC-YYY	Customized Length (up to 920 cm / 362.2 ")



SPO2 SOFT SENSOR

PRODUCT CODE: «RSS-M»




REUSABLE FINGER-TIP PULSE OXIMETER SENSOR (SPO2, PR)

| 9

- Suitable for patients weighing more than 20 kg / 44.1 lbs
- Easy handling and cleaning
- To be connected to the «SDM» with a «SpO2 Adapter Cable» (SC-XXX)
- Noninvasive and continuous SpO2 monitoring

NOTE:

- Requires «SDM» firmware version SMB V07.00 / MPB V05.00 or newer
- Compatible with (non-OxiMax) Nellcor™ Pulse Oximetry⁴

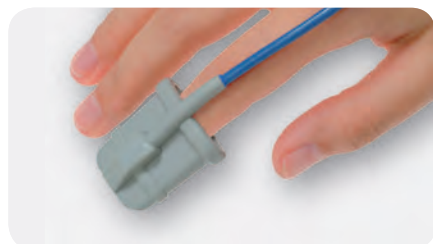

SPO2 ADAPTER CABLE

PRODUCT CODE: «SC-XXX»



ADAPTER CABLE REQUIRED TO CONNECT THE SPO2 SOFT SENSOR (RSS-M) TO THE SENTEC DIGITAL MONITOR (SDM)

Product Code	Product: Digital Sensor Adapter Cable
SC-150	Length = 150 cm / 59.1 "
SC-250	Length = 250 cm / 98.4 "
SC-750	Length = 750 cm / 295.3 "
SC-YYY	Customized Length (up to 920 cm / 362.2 ")

NOTE:

- Requires «SDM» firmware version SMB V07.00 / MPB V05.00 or newer

⁴ Nellcor™ and OxiMax™ are registered trademarks owned by Covidien AG

EAR CLIP (24 PCS.)

PRODUCT CODE: «EC-MI»

10 |



SINGLE-PATIENT USE EAR CLIPS FOR USE WITH V-SIGN™ SENSORS

- For attachment of V-Sign™ Sensors to the patient's earlobe⁵
- Suitable for
 - Adult, pediatric and neonatal patients
 - Mature, intact skin and earlobes of sufficient size

MULTI-SITE ATTACHMENT RING (24 PCS.)

PRODUCT CODE: «MAR-SF»



SINGLE-USE ATTACHMENT RING FOR USE WITH V-SIGN™ SENSORS

- For attachment of V-Sign™ Sensors to various measurement sites
- Suitable for
 - Neonates as well as for adults and pediatrics
 - Sensitive (fragile) but intact skin

MULTI-SITE ATTACHMENT RING (50 PCS.)

PRODUCT CODE: «MAR-MI»



SINGLE-USE ATTACHMENT RING FOR USE WITH V-SIGN™ SENSORS

- For attachment of V-Sign™ Sensors to various measurement sites
- Suitable for
 - Adult, pediatric and neonatal patients
 - Mature, intact skin

⁵ The use of the Ear Clip is contraindicated for patients whose earlobes are too small to ensure adequate sensor application.



CONTACT GEL (5 ML)

PRODUCT CODE: «GEL-04»



CONTACT GEL FOR THE APPLICATION OF V-SIGN™ SENSORS

- Viscous liquid
- For proper CO₂ gas conduction from the patient's skin to V-Sign™ Sensor

NOTE:

- Instead of the Contact Gel you may also use clean tap water, sterile water or sterile saline solution (0.9% sodium chloride) to apply V-Sign™ Sensors.

| 11

SERVICE GAS (6 BOTTLES)

PRODUCT CODE: «GAS-0812»



CALIBRATION GAS CYLINDER OF 0.56 l, 9.5 BAR (5.7 l AT 1 BAR, 21 °C / 69.8 °F)

- Required for the calibration of the PCO₂-part of V-Sign™ Sensors
- One Service Gas cylinder lasts up to 3 to 4 weeks (depending on usage of the «SDMS»)
- Components:
 - 8.00 ± 0.05% CO₂ (carbon dioxide)
 - 12.00 ± 0.05% O₂ (oxygen)
 - Balance N₂ (nitrogen)

NOTE:

- Pressurized containers are considered as dangerous goods. Costs related to handling of dangerous goods during shipment (in particular for air freight) may arise.

V-SIGN™ MEMBRANE CHANGER (9 PCS.)

PRODUCT CODE: «VS-MC»

12 |



RELOADABLE TOOL TO CHANGE THE MEMBRANE OF V-SIGN™ SENSORS

- Membrane change process by 4 simple press-and-turn steps
 - Old sensor membrane removal
 - Sensor surface cleaning
 - Application of new electrolyte
 - Application of new sensor membrane
- Economic and cost saving due to «reloading option» with V-Sign™ Membrane Changer Inserts (VS-MCI)

V-SIGN™ MEMBRANE CHANGER INSERT (5 PCS.)

PRODUCT CODE: «VS-MCI»



SEPARATELY BAGGED, SINGLE-USE INSERTS FOR THE V-SIGN™ MEMBRANE CHANGER

- Required to reload a used V-Sign™ Membrane Changer prior reuse

V-SIGN™ MEMBRANE CHANGER SET

PRODUCT CODE: «VS-MCSET»



SET OF

- 1 V-Sign™ Membrane Changer (loaded)
- 1 V-Sign™ Membrane Changer Insert



V-STATS™ INSTALLATION CD

PRODUCT CODE: «V-STATS_CD»



PC BASED REMOTE MONITORING & TREND DATA DOWNLOAD/ANALYSIS/VIEWING SOFTWARE FOR SENTEC DIGITAL MONITORS

| 13

- Software for
 - Configuration of special (safety-relevant) settings of the SenTec Digital Monitor (SDM)
 - Management of «SDM Parameters Settings» (profiles)
 - Trend data download from the «SDM's» internal memory to a PC for subsequent analysis, viewing and reporting
- Currently supported languages: English, German and French
- Including V-CareNeT™ Package (inactivated)

V-CareNeT™ PACKAGE REGISTRATION CODE

PRODUCT CODE: «V-STATS_CPRC»



CODE TO ACTIVATE V-CareNeT™ REMOTE MONITORING AND SECONDARY ALARM SURVEILLANCE SYSTEM⁶

What is the V-CareNeT™ Package Registration Code?

- Code needed to activate V-CareNeT™ Package incorporated in V-STATS™ (factory default: V-CareNeT™ inactivated, Trial Version available)⁷

What is V-CareNeT™ System?

- V-CareNeT™ System remotely monitors patient's ventilation (tcPCO₂) and oxygenation (SpO₂) via LAN for up to 20 «SDMs»
- Helps to enhance patient safety when nurse-to-patient ratios preclude the level of direct surveillance

Special Features of V-CareNeT™ Systems

- Display of all relevant «SDM» data and alarms on a central station (PC)
- Download of «SDM» trend data via LAN for subsequent analysis, viewing and reporting
- Integrateable in local IT infrastructure of the hospital or as stand alone system

⁶ As urged by APSF (Anesthesia Patient Safety Foundation)

⁷ Starting from V-STATS™ 3.00

DATA MANAGEMENT ACCESSORIES

PC AND PRINTER INTERFACE CABLES / ADAPTERS / ACCESSORIES

A number of accessories are available for data communication between the «SDM» and the PC or the «SDM» and a Seiko DPU-414 Thermal Printer.

14 |



Product Code

USB232C_180

USB232 Converter Cable

For data communication between the «SDM» and a PC with USB-port (e.g. to download data from the «SDM» or to configure special (safety-relevant) settings of the «SDM»).

Specification: length = 180 cm / 70.9 ", DB9 Male

System Requirements: IBM PC 486DX4-100 MHz CPU or higher or compatible system; Available USB port; CD-ROM drive; Windows 2000



Product Code

RS232C_MF

Serial RS232 Cable, DB9 Male / Female

For data communication between the «SDM» and a PC with RS232 port (DB9) (e.g. to download data from the «SDM» or to configure special (safety-relevant) settings of the «SDM»).

Specification: length = 180 cm / 70.9 " or 200 cm / 78.7 ", DB9 Male / Female



Product Code

SDMPrinter_C180

Printer Cable («SDM» to Seiko DPU-414 Thermal Printer)

To interface the «SDM» with the Seiko DPU-414 Thermal Printer if printing of trend data is required.


Specification: length = 180 cm / 70.9 "

Sample pictures



QUICK REFERENCE GUIDE FOR «SDMS»

PRODUCT CODE: «QRG-xx» (REPLACE xx WITH DESIRED LANGUAGE CODE)

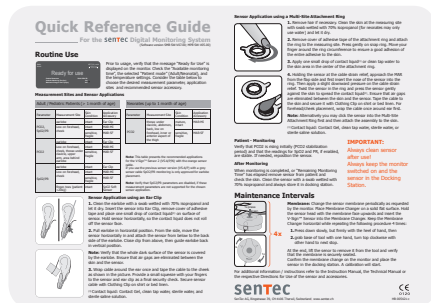

HARDCOPY OF QUICK REFERENCE GUIDE FOR «SDMS»

| 15

- Contact us for availability of languages

INSTRUCTION MANUAL FOR «SDMS»

PRODUCT CODE: «IM-xx» (REPLACE xx WITH DESIRED LANGUAGE CODE)



HARDCOPY OF INSTRUCTION MANUAL FOR «SDMS»

- Contact us for availability of languages

USER MANUALS CD

PRODUCT CODE: «UMCD»



CD CONTAINING PDF-VERSIONS OF CURRENT VERSIONS OF PRODUCT MANUALS AND DIRECTIONS FOR USE

- Quick Reference Guide and Instruction Manual for the «SDMS» (in all supported languages)
- Technical Manual for the «SDM» (in English only)
- Translation Matrix for Menu & Status Messages of the «SDM» for all supported languages
- VueLink / IntelliBridge Installation Manual (in English only)
- Flexport Operations Manual (in English only)
- Service Manual for the «SDM» (in English only)
- Directions for Use for the various Disposables (in English only)
- Instruction Manual for V-STATS™ (in all supported languages)
- V-STATS™ Installation Manual
- Installation Manuals for Mounting Plate and Cable Cleat (in English only)
- Certificate for Disinfection, Protocol for Safety Related Test, Repair Form (in English only)
- Training Videos

PSG ADAPTER CABLES DEMO SET

PRODUCT CODE: «PSG-DEMO»

16 |



FOR FACILITATED DEMONSTRATION OF THE SENTEC DIGITAL MONITOR'S INTERFACING TO POLYGRAPHIC (PG) OR POLYSOMNOGRAPHIC (PSG) SYSTEMS

- can be used to adapt the «SDM» to the following PG or PSG systems:
 - EMBLA S4500, EMBLA S7000, EMBLA N7000, Titanium (Embla)
 - Alice3, Alice4, Alice5 (Philips Respironics)
 - SOMNOlab (Weinmann)
 - Comet (Gras)
 - E-Series, Siesta (Compumedics)
 - Porti 4, Porti 5 (Dr. Fenyves und Gut)
 - EasyScreen (Heinen und Löwenstein)

PSG ADAPTER CABLE UNIVERSAL

PRODUCT CODE: «PSG-X»



ADAPTER CABLE «SDM» TO POLYGRAPHS OR TO POLYSOMNOGRAPHS

LENGTH 180 CM / 70.9 ", OPEN WIRES

- For interfacing of the «SDM» with most Polygraphs (PG) or Polysomnographs (PSG)
- Simple attachment of the open wires to the required plugs for the particular PG or PSG
- Ready-made cables available upon request to connect the «SDM» to the most common PG or PSG systems (Embla, Alice, Sleeplab Pro, ...)



NURSE CALL CABLE UNIVERSAL

PRODUCT CODE: «NC-X»




ADAPTER CABLE «SDM» TO NURSE CALL SYSTEM LENGTH 180 CM / 70.9 ", OPEN WIRES

| 17

- For interfacing of the «SDM» with most nurse call systems
- Simple attachment of the open wires to the required plugs for the particular nurse call system

VUELINK ADAPTER

PRODUCT CODE: «VL-A»

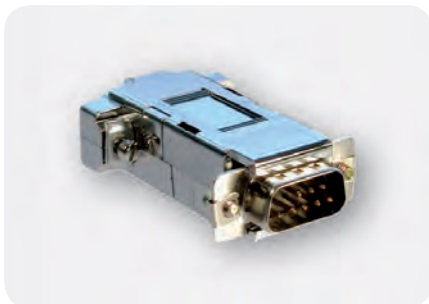

ADAPTER «SDM» TO PHILIPS VUELINK INTERFACE MODULE

- For Interfacing of the «SDMS» with Philips Patient Monitors
- For display of «SDMS» measurement data on the main screen of the Philips Monitoring System

NOTE:

- Please verify your SDM's compatibility with your local distributor or with SenTec AG.
- The VueLink Adapter connects the «SDM» to a VueLink connection cable with D-SUB 9 connector and a VueLink Interface Module Auxiliary Plus (Type B) with Digital Open Interface Driver. Both are available at Philips dealers only.

V-SIGN™ TRAINING SET

PRODUCT CODE: «VS-TSET»

18 |



SET TO TRAIN MEMBRANE CHANGE OF V-SIGN™ SENSORS

- Set for training purposes on membrane change
- 1 multiple-use Membrane Changer
- 1 dummy sensor
- 2 multiple-use dummy membrane rings (colored in red)

«SDMS» CARRY BAG

PRODUCT CODE: «SDMS_CB»



CARRY BAG FOR THE SENTEC DIGITAL MONITORING SYSTEM (SDMS)

- Stylish yet sturdy and durable carry bag
- Specifically designed compartments for
 - SenTec Digital Monitor (SDM), sensors, cables (sensor adapter cables / power cable), gas bottle
 - Frequently used disposables and documents (Quick Reference Guide, Instruction Manual)
 - «SDM» can be kept switched «on» during transportation
- Zipper top can be opened for monitoring during patient transport
- Velcro® bottom which can be quickly pulled open to access the monitor's rear panel
- Two gauze covered ventilation slots
- General specifications
 - Size: 340 x 285 x 150 mm / 1.3 " x 1.1 " x 0.6 "
 - Weight: 1.56 kg or 3.44 lb
 - Color: grey
 - Material: hard-wearing nylon (padded)
 - Sturdy, adjustable shoulder strap (removable)

⁸ Velcro® is a registered trademark owned by Velcro Industries B.V.



CLOTHING CLIP FOR SENSOR CABLE (2 PCS.)

PRODUCT CODE: «SC-CC»



CLIP FOR FIXATION OF THE CABLE OF SENTEC SENSORS ON PATIENT CLOTHES OR BED LINEN

| 19

- Proper cable organization to help to reduce strain
- Helps to prevent dislocation of the sensor when attached to the patient
- Suitable for all SenTec sensors (models «VS-A/P/N», «VS-A/P», «RSS-M»)

CABLE CLEAT & BIN FOR DISPOSABLES

PRODUCT CODES: «CC_SDM», «CC_BFD»



Cable Cleat (CC_SDM)



«SDM» with Cable Cleat



Bin for Disposables (CC_BFD)



«SDM» with Cable Cleat and Bin for Disposables

Product Code

CC_SDM

CC_BFD

Product

Cable Cleat for SenTec Digital Monitor

Bin for Disposables (to be mounted on Cable Cleat for «SDM»)

- Sensor cable and disposables stowage
- Protection of sensor cable from damage or breakage
- Can be used together with the Roll Stand for the «SDM» (see product code «RS_SDM»)
- Can be used together with the Roll Stand (please order special screws separately)

ROLL STAND FOR THE SENTEC DIGITAL MONITOR

PRODUCT CODE: «RS_SDM»

20 |



ROLL STAND FOR THE SENTEC DIGITAL MONITOR WITH BASKET AND CABLE CLEAT

- Mobile mounting option for your monitor
- Durable and lightweight
- With locking castors and a pivoting head allowing adjustment for enhanced viewing
- Attached basket accommodates additional supplies as well as storage for the sensor cable
- Can be used together with the Cable Cleat (please order special screws separately)

WALL MOUNT BRACKET

PRODUCT CODE: «SDMS-WMB»



WALL MOUNT BRACKET FOR FIXATION OF «SDM» TO WALL

- Wall track (48.3 cm / 19 ")
- Adjustable arm (20.3 cm / 8 ") with rotating / tilt features and quick-release dovetail
- Device mount plate with dovetail and 4 screws
- Adjustable basket (20.3 x 15.4 x 20.3 cm / 8 " x 6 " x 8 ")
- Packet of wall mounting screws (for dry wall, metal and masonry)
- Two small plastic end stops used with the top and bottom wall screws



MOUNTING PLATE FOR INFUSION STANDS AND WALL RAILINGS

PRODUCT CODE: «MP-IW»



UNIVERSAL MOUNTING PLATE

FOR FIXATION OF «SDM» TO INFUSION STANDS AND WALL RAILINGS


- For «SDM» fixation to infusion stands or other rigid tubes or poles with diameters from 12 mm to 38 mm / 0.05 " to 0.15 ", or to wall railings with standard dimensions of 25 mm / 0.1 " height and 10 mm / 0.04 " thickness



| 21

MOUNTING PLATE FOR WALL RAILINGS

PRODUCT CODE: «MP-WR»

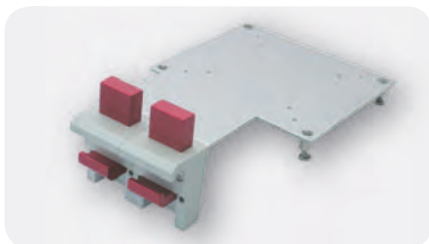


MOUNTING PLATE

FOR FIXATION OF «SDM» TO WALL RAILINGS

- For «SDM» fixation to wall railings with standard dimensions of 25 mm to 35 mm / 0.10 " to 0.14 " height and 8 mm to 10 mm / 0.03 " x 0.04 " thickness

MOUNTING PLATE FOR ROLL STAND HEADS

PRODUCT CODE: «MP-RSH»

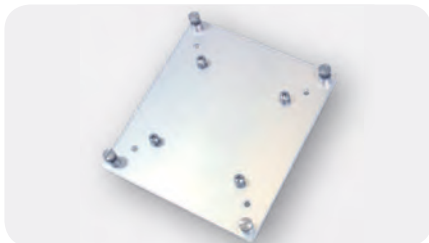

MOUNTING PLATE

FOR FIXATION OF «SDM» TO HEADS OF ROLL STANDS

- For «SDM» fixation to heads of roll stands, such as e.g. GCX POLYMOUNT



POTENTIAL EQUILIZATION CABLE


PRODUCT CODE: «POT-300»

22 |



POTENTIALLY COMPENSATED HOSPITAL EQUIPMENT CABLE FOR CATEGORY 3 AND 4 MEDICAL EXAMINATION ROOMS TÜV TESTED

- Highly flexible connecting leads with green-yellow insulation for potential equalization
- On both ends with assembled right-angled, spring-loaded socket
- Sockets made of nickel-lated brass with Multilam made of gold-plated, hard drawn copper alloy

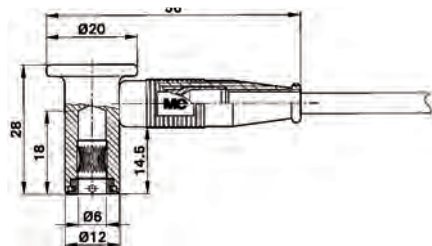

Specifications:

- Length: 300 cm / 118.1 "
- Lead cross section: 4.0 mm² / 0.02 square inch
- Sleeve Insulation: TPE



**PLEASE CONTACT US,
IF YOU HAVE ANY QUESTIONS!**

