



INSTALLATION INSTRUCTIONS FOR CAGS SKIP SHIFT



TECHNICAL ASSISTANCE 1-714-848-5515

Jet Performance Products

1993-2002 Camaro/Firebird CAGS Plug Seal Kit

Model #61610

INTRODUCTION:


The CAGS (Computer Aided Gear Selection) is a built-in system that automatically upshifts from first gear to fourth gear at light throttle speeds between 15 and 20 m.p.h. The ratios for maximum performance acceleration are 1,2,3,4,5. Although for best part-throttle economy, with CAGS engaged, the ratio is 1,4,5,6. The JET Model #61610 CAGS Plug Seal Kit will disengage the "skip shift" feature and seal the skip shift solenoid/factory connector from contamination.

INSTALLATION PROCEDURES:

1. Disconnect the negative (black) battery cable from the battery.
2. Raise the vehicle using **ONLY** the proper procedures outlined in the factory GM Service Manual. To order a service manual for your vehicle, call Helm, Inc. at 1-800-782-4358. **THINK SAFETY FIRST!**
ALWAYS MAKE SURE THE VEHICLE IS PROPERLY SUPPORTED PRIOR TO WORKING UNDERNEATH IT.
3. Remove the Blue/White cap from the JET CAGS Skip Shift. Disconnect the factory wiring harness from the skip shift solenoid on the left rear (Driver's Side) of the transmission. Plug the blue/white cap into the skip shift solenoid on the transmission sealing the connection from the elements.

Plug the factory harness into the JET CAGS Skip Shift.
Secure the factory harness and skip shift with the supplied tie wrap to keep the harness and skip shift with the supplied tie wrap to keep the harness from dangling/dragging.

4. Lower vehicle following safety procedures and re-connect the negative battery cable.

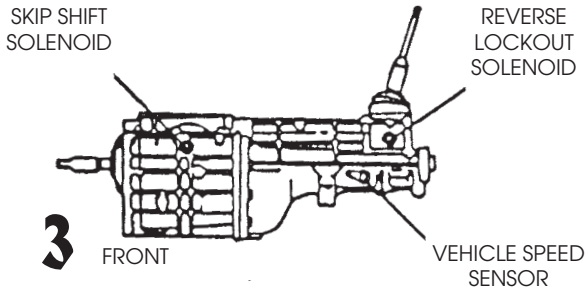

BORG-WARNER (T56) 6-SPEED MANUAL TRANSMISSION

GM, Camaro, Firebird are registered trademarks of the
General Motors Corporation.
Rev. 696030

Jet Performance Products

93-04 Corvette #61010/#61615

04 & Up CTSV #61618

04 & Up GTO #61619

INTRODUCTION:

The CAGS (Computer Aided Gear Selection) is a built-in system that automatically upshifts from first gear to fourth gear at light throttle speeds between 15 and 20 mph. The ratios for maximum performance acceleration are 1,2,3,4,5,6. Although for best part-throttle economy, with the CAGS engaged, the ratio is 1,4,5,6. The **Jet Performance CAGS Skip Shift Eliminator** will disengage the "skip-shift" feature and seal the solenoid/factory connector from contamination.

INSTALLATION PROCEDURES:

1. Disconnect the negative (black) battery cable from the battery.
2. Raise the vehicle using **ONLY** the proper lift and safety procedures outlined in the GM Corvette Service Manual. To order service manual for your vehicle, call Helm, Inc. at 1-800-782-4358. **THINK SAFETY FIRST! ALWAYS MAKE SURE THE VEHICLE IS PROPERLY SUPPORTED PRIOR TO WORKING UNDERNEATH IT.**
3. Remove the Blue/White cap from the JET CAGS Skip Shift. Disconnect the factory wiring harness from the skip shift solenoid on the left rear (Driver's Side) of the transmission. Plug the blue/white cap into the skip shift solenoid on the transmission sealing the connection from the elements.

- Plug the factory harness into the JET CAGS Skip Shift.
Secure the factory harness and skip shift with the supplied tie wrap to keep the harness from dangling/dragging.
4. Lower vehicle following safety procedures and re-connect the negative battery cable.

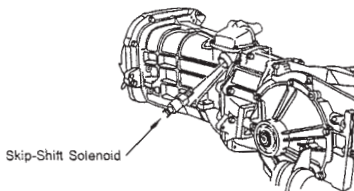


Diagram 1

**IF YOU SHOULD ENCOUNTER A PROBLEM
AFTER INSTALLATION, DO NOT CONTACT
THE DISTRIBUTOR YOU PURCHASED IT FROM - CALL THE
JET TECH LINE AT - 1-714-848-5515**

**ASK ABOUT OTHER JET PRODUCTS FOR YOUR
CAR OR TRUCK**

- * PERFORMANCE CHIPS
- * PERFORMANCE MODULES
- * PERFORMANCE PROGRAMMERS
- * PERFORMANCE PULLEYS
- * JET 6-PAK CHIP
- * JET SHIFT COMMAND

Limited Warranty

JET Performance Products warrants Chips and Modules to be free from defects in material and workmanship under normal use and if properly installed. This limited lifetime warranty is to the original purchaser for as long as he or she owns the vehicle on which the product was originally installed, provided all information requested is furnished. If found to be defective as mentioned above, it will be replaced or repaired at the sole discretion of JET if returned prepaid along with proof of date of purchase.

All other products and services performed by JET are warranted in defects in material and workmanship for a period of 6 months from date of purchase. This warranty is to the original purchaser for as long as he or she owns the vehicle on which the product was originally installed. Repair, Replacement, or Credit will be based on the date of purchase. Costs for labor are specifically excluded and are the sole responsibility of the purchaser.

This warranty does not apply to Custom Programming or any product incorrectly installed, modified by the purchaser, or to any product that has been subjected to misuse, negligence or accident.

To obtain warranty service and Return Authorization Number, contact our Customer Service Department at 714-848-5515 between 8 am and 5 pm Pacific Standard Time, Monday through Friday.

Defective Products may be brought or sent prepaid (with Return Number) to JET Performance Products, 17491 Apex Circle, Huntington Beach, CA 92647.

JET Performance Products

17491 Apex Circle

Huntington Beach, CA 92647

Phone: (714) 848-5515 • Fax: (714) 847-6290

61610, 61615, 61618, 61619