



Electrolux

ecostore
2 Half Door Digital Stainless Steel
Freezer, 670lt (-22/-15) R290 - UK
Plug

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



ecostore

2 Half Door Digital Stainless Steel
Freezer, 670lt (-22/-15) R290 - UK Plug

727409 (RE472HFCCG)

Eco Store Stainless Steel
Freezer - 670 lt 2 Half Doors
(-22/-15) R290 - UK Plug -
230 V/1N/50Hz

Short Form Specification

Item No. _____

Two half doors freezer with internal and external structure in 430 AISI stainless steel; external back and bottom panels in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. On-site reversible door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; automatic defrost and manual evaporation of defrost water. For ambient temperatures up to 43 °C. CFC and HCFC free. R290a gas in refrigeration circuit.

Supplied with n. 3x2/1GN Rilsan coated grids and n. 3 sets of 2 stainless steel grid runners. Mounted on wheels and equipped with UK plug. Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Main Features

- Right hinged two 1/2 doors.
- Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Adjustable temperature range from -15 °C to -22 °C to suit meat, fish and dairy storage requirements.
- Performance guaranteed at ambient temperatures of 43 °C.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Rilsan coated grids for improved protection.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Delivered with UK plug.

Construction

- Interior base with corners, pressed from a single sheet.
- External back panel in galvanized steel.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Lockable door.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- CFC and HCFC-free insulation.
- Doors are self-closing and can be fully opened up to 180°.
- Mounted on wheels.
- R290 refrigerant to reduce green house and ozone depletion effects.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.

Included Accessories

- 3 of 2/1 GN GREY RILSAN GRID W/ 2 RUNNERS PNC 881020

Optional Accessories

- 4 SWIVELLING WHEELS (2 W/ BRAKE) PNC 881002

APPROVAL: _____



Electrolux

ecostore
2 Half Door Digital Stainless Steel
Freezer, 670lt (-22/-15) R290 - UK Plug

- 2/1 GN GREY "RILSAN" GRID PNC 881004
- 2/1 GN AISI 304 S/S GRID PNC 881016
- 2/1 GN GREY RILSAN GRID W/ 2 RUNNERS PNC 881020
- LEFT PEDAL OPENING FOR 670L REF.CABINET PNC 881027
- Printer for HACCP basic version refrigerator PNC 881457



ecostore
2 Half Door Digital Stainless Steel Freezer, 670lt (-22/-15) R290 - UK Plug

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.


2012.09.28




Electrolux

ecostore
2 Half Door Digital Stainless Steel
Freezer, 670lt (-22/-15) R290 - UK Plug

Front

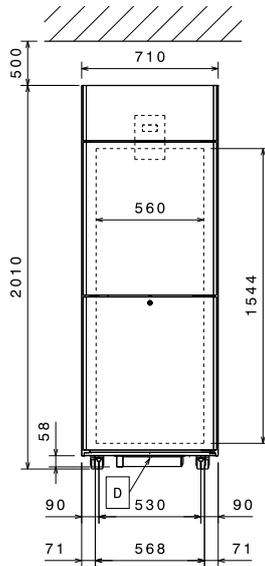


Top

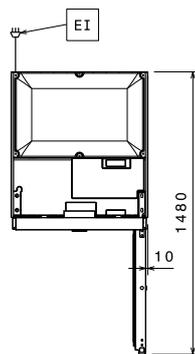

EI = Electrical connection

Side

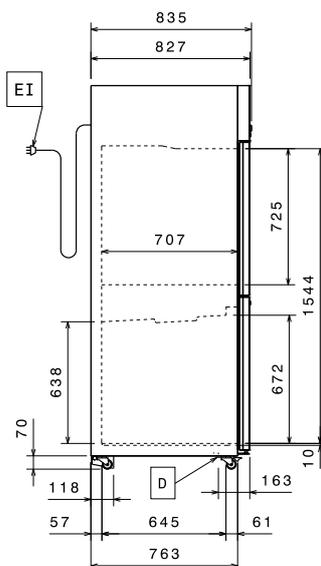

Electric

Supply voltage:

727409(RE472HFCG) 230 V/1 ph/50 Hz

Connected load:

0.505 kW

Key Information

Door hinges:	2 Right
External dimensions, Height	2010 mm
External dimensions, Width	710 mm
External dimensions, Depth	837 mm
External dimensions, Depth with Doors Open:	1480 mm
Number and type of doors:	2x1/2 Full
Gross capacity	670 lt
Number and type of grids (included):	3 - GN 2/1
Type of external material:	Stainless Steel
Type of internal material:	Stainless Steel
Internal panels material:	Stainless Steel
Number of positions & pitch:	44; 30 mm

Refrigeration Data

Control type:	Digital
Refrigerant type:	R290
Refrigeration power:	586 W
Refrigeration power at evaporation temperature:	-30 °C
Operating temperature min.:	-15 °C
Operating temperature max.:	-22 °C
Operating mode	Ventilated

ecostore
2 Half Door Digital Stainless Steel Freezer, 670lt (-22/-15) R290 - UK Plug

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

