

Freezer counters 290 lt

The Electrolux range of freezer counters combines the convenience of worktop space with frozen storage located below. This range of counters is manufactured throughout in AISI 304 stainless steel to meet the highest hygiene standards.

The range comprises three sizes of cabinet, with built-in or remote compressor units, in various door or drawer configurations and in refrigerator or freezer versions. The models detailed on this sheet have 2 full doors and operate over the temperature range of -18°C to -24°C .



726577

EASY TO INSTALL

- Mounted on legs with height adjustment.
- Built-in or remote compressor to suit operating conditions.
- Suitable for use in ambient temperatures of up to 43°C .

EASY TO CLEAN

- Constructed from AISI 304 stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on stainless steel legs to give 150 mm clearance for ease of cleaning the floor.

EASY TO USE

- Adjustable temperature range from -18°C to -24°C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN1/1 containers.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Worktop in AISI 304 stainless steel with a 50 mm thickness.
- Available version with integrated rear upstand.

EASY TO MAINTAIN

- Access to all components from the front.
- In compliance with H requirements.

EASY ON THE ENVIRONMENT


- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- 60 mm insulation thickness for energy saving.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.



Electrolux

726577, 726579

726578

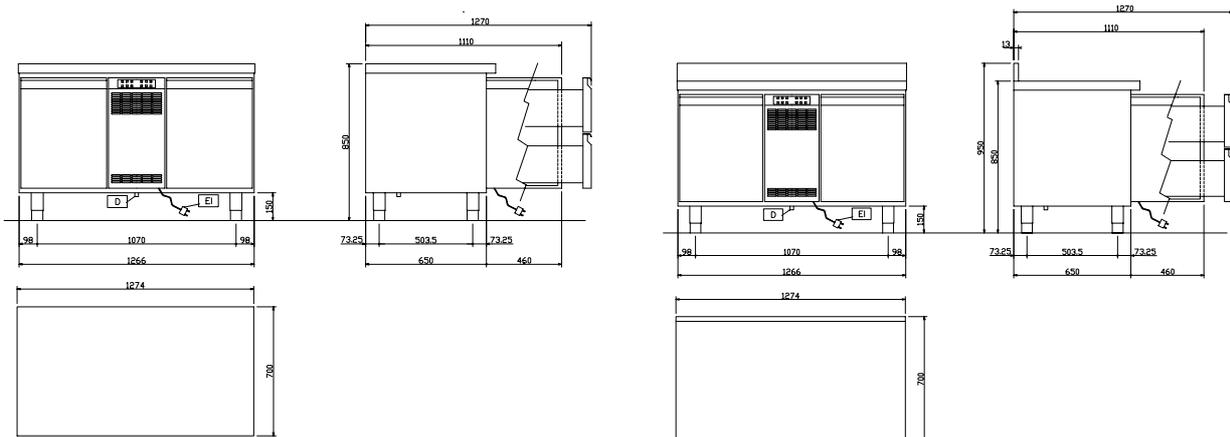

	RCDF2M20 726577	RCDF2M20U 726578	RCDF2M20R 726579
LEGEND			
D - Water drain	16mm	16mm	16mm
ED - Remote electrical connection			●
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
TECHNICAL DATA			
Operating temperature - min/max °C	-22/-15	-22/-15	-22/-15
Operating mode	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	291	291	291
Cooling unit	Built-in	Built-in	Remote
External dimensions - mm			
width	1274	1274	1274
depth/with open doors	700, 1110	700, 1110	700, 1110
height	850	950	850
Worktop type	Stainless Steel	Stainless Steel with Splashback	Stainless Steel
N° and type of door	2	2	2
Door hinges	1 Left+1 Right	1 Left+1 Right	1 Left+1 Right
N° and type of grids (included)	2, GN 1/1	2, GN 1/1	2, GN 1/1
Compressor power - HP	3/4	3/4	3/4
N° defrost in 24 hrs.	4/16'	4/16'	4/16'
Refrigerant type	R404a	R404a	R404a
Refrigerant quantity - g.	280	280	280
Refrigeration power - W	925	925	925
Refrigerant power at evaporation temperature - °C	-31	-31	-31
Power - kW			
installed-electric	0.75	0.75	0.078
Net weight - kg.	129	130	115
INCLUDED ACCESSORIES			
1/1 GN GREY "RILSAN" GRID	2	2	2
ACCESSORIES			
1/1 GN GREY "RILSAN" GRID	881435	881435	881435
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539	880539
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133	880133
KIT 1 DOOR FOR REFRIGER.COUNTER	881517	881517	881517
KIT HACCP EKIS	922166	922166	922166
LOCK FOR REFRIGERATED COUNTERS	881499	881499	881499
PLASTIC CONTAINER GN 1/1 H=100 MM	811451	811451	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038	881038
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457
REMOTE UNIT -24-15°C FOR 550/650 LT			881465

Electrolux HD-Line

Freezer counters 290 lt

HBBB010

2009-10-06

Subject to change without notice