

SMART freezer counters 290 lt

The Electrolux range of refrigerated counters combines the convenience of worktop space with cold storage located below. This range of counters is manufactured throughout in AISI 304 stainless steel to meet the highest hygiene standards.

The range comprises three sizes of counter, with built-in or remote compressor units, in various door and drawer configurations and in refrigerator or freezer versions. The models detailed on this sheet benefit from the advantages of smart electronic control. It has two full doors and operates over the temperature range of -18°C to -24°C .



726586

EASY TO INSTALL

- Mounted on legs with height adjustment.
- Built-in compressor to suit operating conditions.
- Suitable for use in ambient temperatures of up to 43°C .
- Touch pad selection for the five most common food stuffs the smart electronic control sets the appropriate temperature and humidity.

EASY TO CLEAN

- Constructed from AISI 304 stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on stainless steel legs to give 150 mm clearance for ease of cleaning the floor.

- The SMART defrosting cycle only starts if it is necessary (by checking the intensity of ice on the evaporator).

EASY TO USE

- Adjustable temperature range from -18°C to -24°C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN1/1 containers.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- HACCP incorporated - all events are recorded, displaying, date and time.
- A memory function keeps the information for working even when a probe failed.
- Worktop in AISI 304 stainless steel

with a 50 mm thickness.

EASY TO MAINTAIN

- Access to all components from the front.
- In compliance with H requirements.
- Fault code display.


EASY ON THE ENVIRONMENT

- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- 60 mm insulation for energy saving.
- Less on energy consumption due to smart defrosting cycles.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.



Electrolux

726586

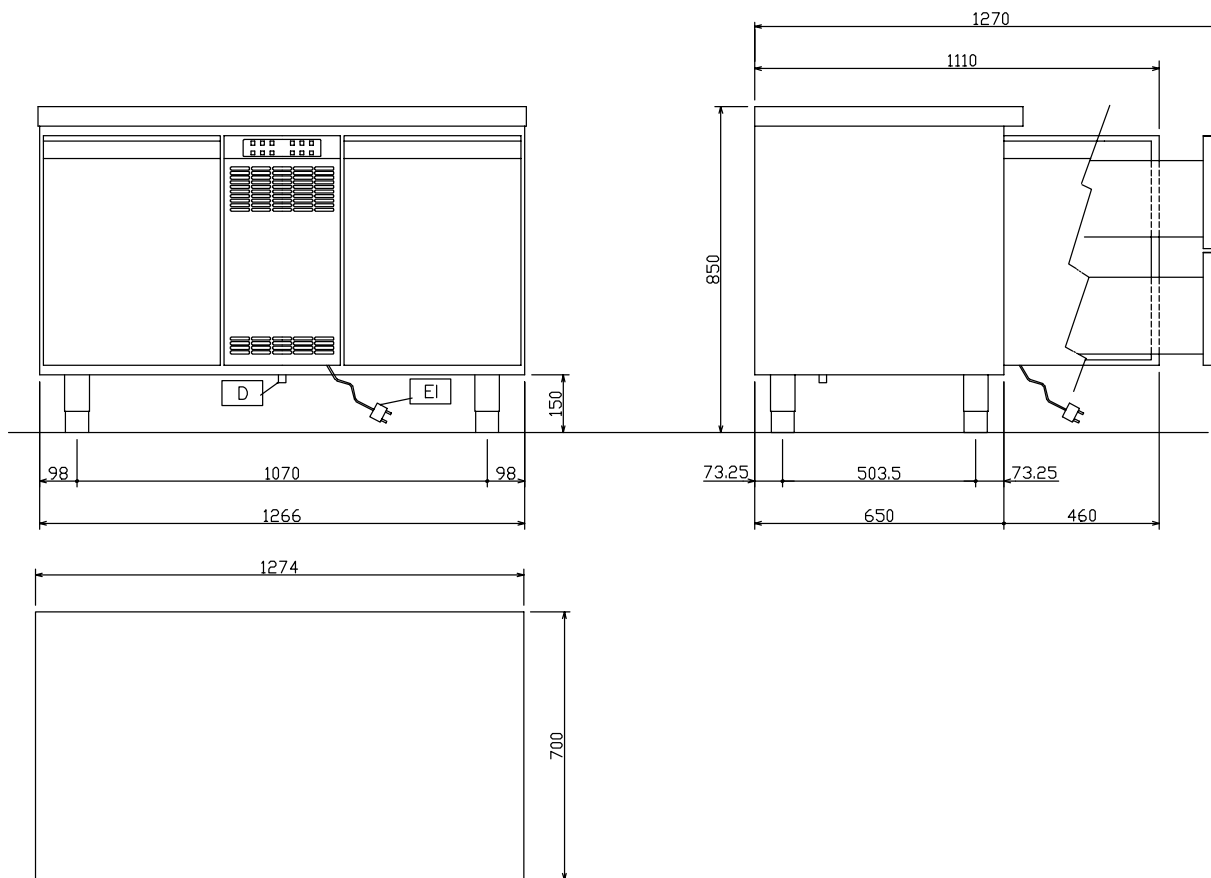

	RCEF2M2 726586
LEGEND	
D - Water drain	16mm
EI - Electrical connection	230 V, 1N, 50
TECHNICAL DATA	
Operating temperature - min/max °C	-22/-15
Operating mode	Ventilated
Gross capacity (D.I.N. 8952) - l.	291
Cooling unit	Built-In
External dimensions - mm	
width	1274
depth/with open doors	700, 1110
height	850
N° and type of door	2
Door hinges	1 Left+1 Right
N° and type of grids (included)	2, GN 1/1
Compressor power - HP	3/4
N° defrost in 24 hrs.	4/16'
Refrigerant type	R404a
Refrigerant quantity - g.	280
Refrigeration power - W	925
Refrigerant power at evaporation temperature - °C	-31
Power - kW	
installed-electric	0.75
Net weight - kg.	129
INCLUDED ACCESSORIES	
1/1 GN GREY "RILSAN" GRID	2
ACCESSORIES	
1/1 GN GREY "RILSAN" GRID	881435
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539
KIT 1 DOOR FOR REFRIGER.COUNTER	881517
LOCK FOR REFRIGERATED COUNTERS	881499
PLASTIC CONTAINER GN 1/1 H=100 MM	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038
PRINTER FOR HACCP BASIC VERSION	881532

Electrolux HD-Line

SMART freezer counters 290 it

HBBA010

2009-10-22

Subject to change without notice