

RANGE COMPOSITION

The range consists of 2 fan assisted models of 600 and 1300 litres refrigeration cabinets that offer excellent standards in terms of performance and efficiency. These models come in freezer version in 304 AISI and are available with full doors.



726687

AU SERIES

DIGITAL FREEZERS - 60 Hz

ZANUSSI
PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Internal and external structure in 304 AISI, top and back in galvanized steel. 150 mm high-adjustable feet.
- ◆ Digital control panel allowing the easy and precise setting and control of the internal temperature.
- ◆ Completely automatic defrosting and automatic evaporation of defrost water.
- ◆ High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- ◆ The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- ◆ Excellent forced air cooling system that ensures the utmost uniformity of temperature in the cabinet and guarantees a perfect storage quality of the goods.
- ◆ High-density expanded polyurethane insulating foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- ◆ The rational use of the internal space of the refrigerator guarantees a large storage area suitable to contain 2/1 GN grids.
- ◆ Reversible self-closing door, in positions less than 90°, with a stop at 95° and a maximum opening at 180°, equipped with a magnetic door seal to guarantee perfect closure.
- ◆ The pressed stainless steel recessed door handle without joints makes opening the cabinet

extremely easy. All the doors are fitted as standard with locks and keys and a microswitch to switch off the fan when the door is opened.


- ◆ Stainless steel feet (plastic interior).
- ◆ A wide range of optional accessories are available.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

CHARACTERISTICS	MODELS	
	RS06FX1F6 726687	RS13FX2F6 726688
Operating temperature - min/max °C	-22/-15	-22/-15
Operating mode	Ventilated	Ventilated
Type of stainless steel		
external	304 AISI	304 AISI
internal	304 AISI	304 AISI
Gross capacity (D.I.N. 8952) - l.	600	1300
External dimensions - mm		
width	720	1440
depth/with open doors	788, 1440	788, 1440
height	2000	2000
N° and type of door	1	2
Door hinges	Right Side	1 Left+1 Right
N° and type of grids (included)	3, GN 2/1	6, GN 2/1
N° defrost in 24 hrs.	4/25'	4/25'
Refrigerant type	R404a	R404a
Refrigerant quantity - g.	300	450
Refrigeration power - W	1721	2098
Power - kW		
installed-electric	0.8	0.985
Net weight - kg.	134	247
Power supply - V, phases, Hz	220 V, 1N, 60	220 V, 1N, 60
INCLUDED ACCESSORIES		
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	3	6
2/1 GN GREY "RILSAN" GRID	3	6

ACCESSORIES	MODELS	
	RS06FX1F6 726687	RS13FX2F6 726688
2 S/S RUNNERS FOR 600-650/1300-1400L.REF	881456	881456
2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES	880539	880539
2/1 GN AISI 304 S/S GRID	881067	881067
2/1 GN GREY "RILSAN" GRID	880720	880720
3 RILSAN CENTR.GRIDS-2 DOOR REF/FREEZERS		880211
ENERGY FREE ALARM DEVICE	881089	881089
KIT HACCP EKIS	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205
KIT TO FIT 11 PASTRY TRAYS (400X600 MM)	881031	881031
MEAT RAIL FOR 650-1400 L REFRIGERATORS		881451




www.zanussiprofessional.com

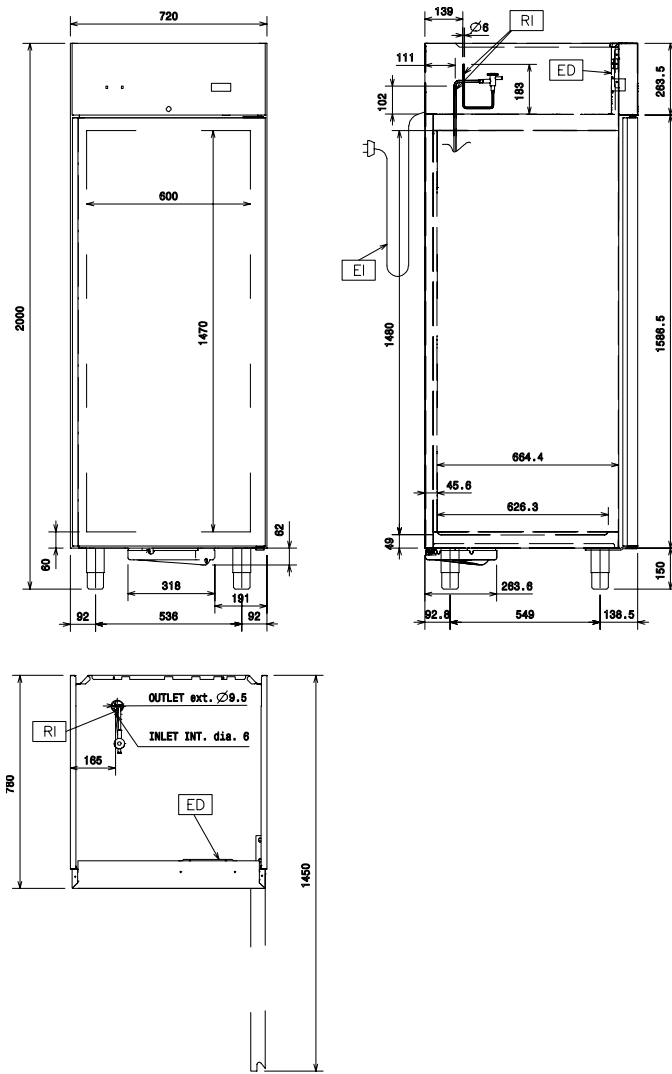

	<p>RS06FX1F6 726687</p>
<p>EI - Electrical connection</p>	<p>220 V, 1N, 60</p>



www.zanussiprofessional.com

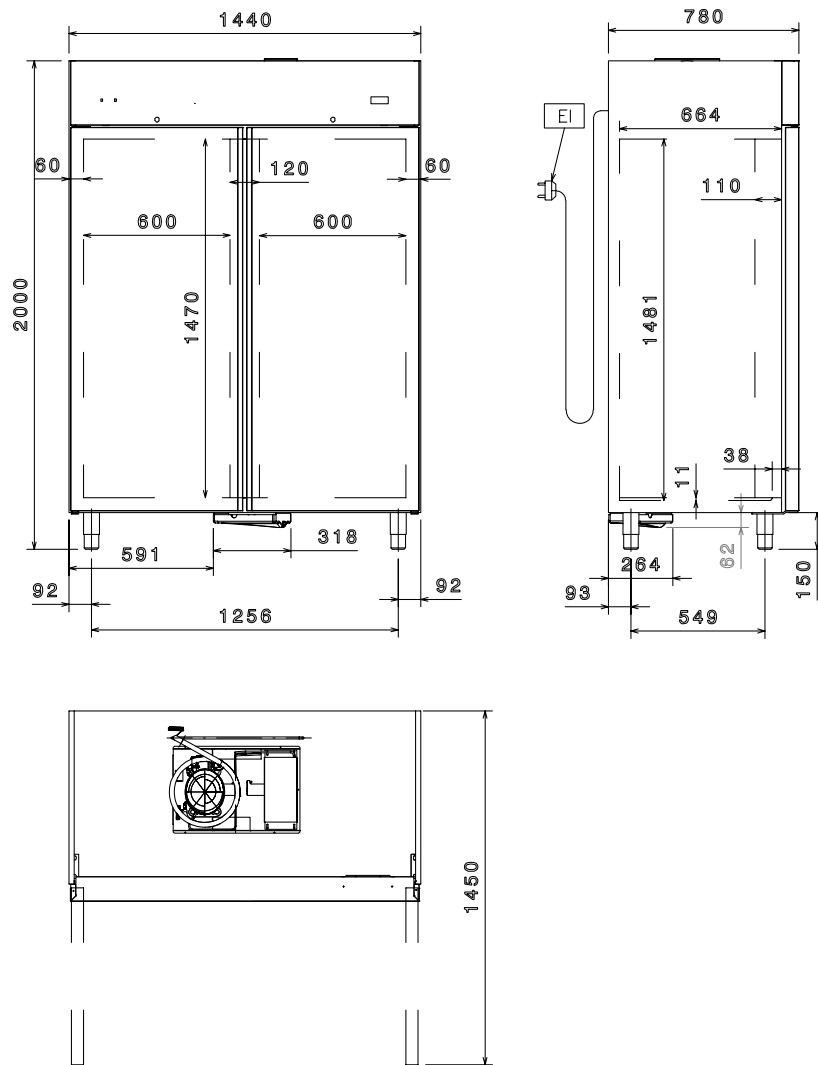

	RS13FX2F6 726688
EI - Electrical connection	220 V, 1N, 60



www.zanussiprofessional.com