

### Features

- Four-way selectable, tri or quad- amplified screen channel system
- Unique HF/VHF diaphragm has less mass than traditional diaphragms resulting in exceptional dynamic range, extended high-frequency response and lower distortion
- LF-3215 is constructed of MDF and features single woofer chambers
- Low-distortion waveguides provide highly articulate dialogue
- Shallow depth (20") facilitates installation
- THX™ approved for professional cinema applications

Developed specifically for the unique requirements of professional motion picture playback, the SC-324 extends QSC's commitment to the cinema market. As a member of the DCS Digital Cinema Speaker Series, the SC-324 is a four-way, selectable tri or quad-amplified screen channel loudspeaker system comprised of two main units - the MHV-1090 mid-high-very high-frequency system and the LF-3215 low-frequency system.

The MHV-1090 mid-high-very high system features a high output, horn loaded 10" midrange cone driver and a coaxial neodymium high-frequency/very high-frequency compression driver. The MHV-1090 includes a driver protection network and a passive crossover for tri-amp operation. The protection circuitry prevents low-frequency signals from damaging the high-frequency and very high-frequency driver. A high power 10" cone driver allows operation as low as 250 Hz and the advanced phase plug coupling permits a crossover point of up to 1800 Hz to the high-frequency horn. This ensures that most of the dialog range is reproduced by a single element, for unmatched intelligibility.

The coaxial neodymium high-frequency/very high-frequency compression driver provides a dramatic improvement in dynamic response, clarity and transparency. The annular high-frequency diaphragm covers the frequency range between 1800 and 7000 Hz with a smooth, linear response. The large diaphragm excursion of +/-0.8 mm results in high output and increased power handling. The very high-frequency driver covers the frequency range from 7000 to 22,000 Hz and eliminates the dome break up of conventional drivers that can cause resonance and harsh, metallic sound.

The LF-3215 dual 15" (381mm) low-frequency enclosure is designed specifically to address the extended low-frequency response required for cinema applications. The LF-3215 covers the frequency range from 35 Hz to 250 Hz. Close Coupled Woofers (CCW), with their tight spacing between woofers, improves coupling and keeps coverage angles wide over a greater frequency range than more widely spaced designs.

The SC-324 is designed for ease of installation. The MHV-1090 components come pre-assembled to reduce field assembly time. Three bolts are all that are required to secure the MHV-1090 to the top of the LF-3215 enclosure.



THX

### Specifications

#### SC-324

Nominal Coverage	90° horizontal x +20 to -30° vertical
Frequency Range (-6 dB)	33 - 20 kHz
Active Crossover Frequencies	250, 1700 and 6000 Hz, 24 dB per octave

#### LF-3215

#### MHV-1090

Impedance	4Ω	MF: 8Ω HF: 8Ω VHF: 8Ω
Sensitivity 1 watt/1 meter, half space	98.5 dB	Tri-amp MF: 105 dB HF/VHF: 110 dB Quad-amp MF: 105 dB HF: 110 dB VHF: 110 dB

#### Maximum Input Power<sup>1</sup>

8 hours of 6 db crest factor IEC 268 noise spectrum	600 W RMS	MF: 275 W RMS HF/VHF: 230 W RMS	MF: 275 W RMS HF: 150 W RMS VHF: 80 W RMS
---	-----------	---------------------------------	---

2 hours of 6 db crest factor pink noise, 50 Hz - 20 kHz, AES method	800 W RMS	MF: 800 W RMS HF/VHF: 500 W RMS maximum
---	-----------	---

Recommended Amplifier Power	1200 W RMS maximum	MF: 800 W RMS HF: 500 W RMS VHF: 300 W RMS maximum
-----------------------------	--------------------	--

Recommended Processing	Subsonic filter below 30 Hz, >18 dB per octave	4th order LR crossover at 250, 1700 and 6000 Hz via QSC DCM or QSCControl.net
------------------------	--	---

Connectors	Barrier strip screw terminals accept up to #10 AWG stranded wire
------------	--

Transducers	Two 15" (381mm) high efficiency, extended bass woofer featuring a 3" copper voice coils	MF: 10" high-efficiency, horn-loaded cone with phase plug HF/VHF: coaxial neodymium compression driver with 3.5" (90 mm) HF diaphragm and 1.75" (44 mm) VHF diaphragm
-------------	---	---

Enclosure	Quasi B4 alignment, ported enclosure with fully flared ports, symmetrical port design, tuned to 36 Hz, constructed of MDF and heavily braced. Features vandal resistant woofer mounting bolts	Tilt/Pan Bracket ±10° vertical tilt ±10° horizontal pan
-----------	---	---



Dimensions (HWD)	36" x 30" x 20.3" (910 mm x 762 mm x 516 mm)	39" x 30" x 20" (990 mm x 762 mm x 508 mm)
------------------	--	--

Weight - Net	172 lbs (78 kg)	84 lbs (38.5 kg)
--------------	-----------------	------------------

System Weight	256 lbs (116 kg)
---------------	------------------



Baffle Cut-Out	76" x 32"
----------------	-----------

Top

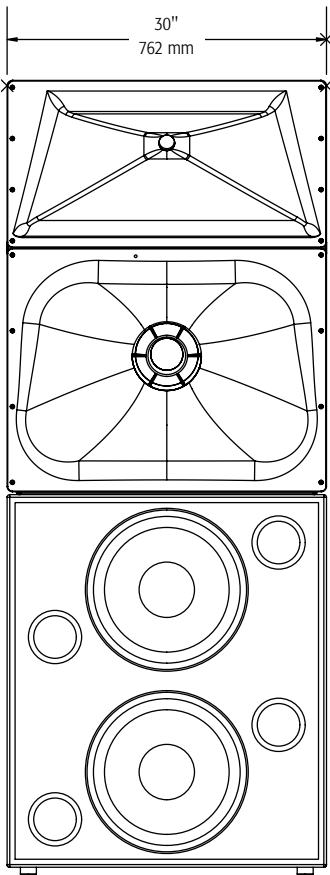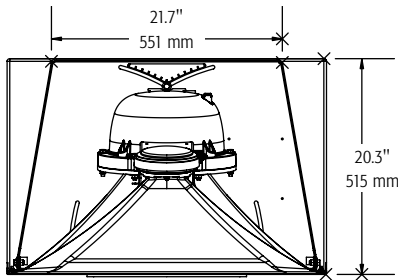

Front

Side

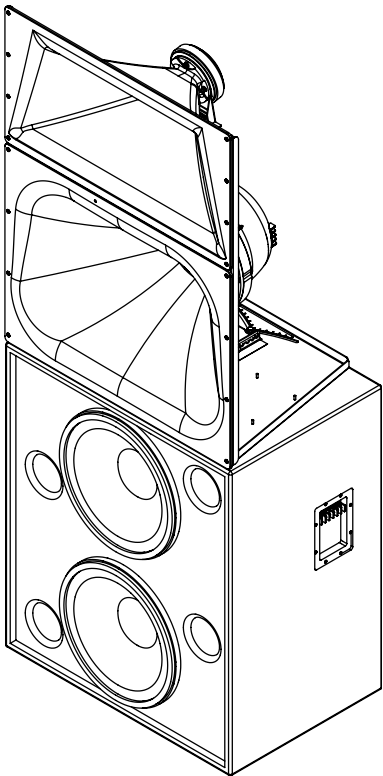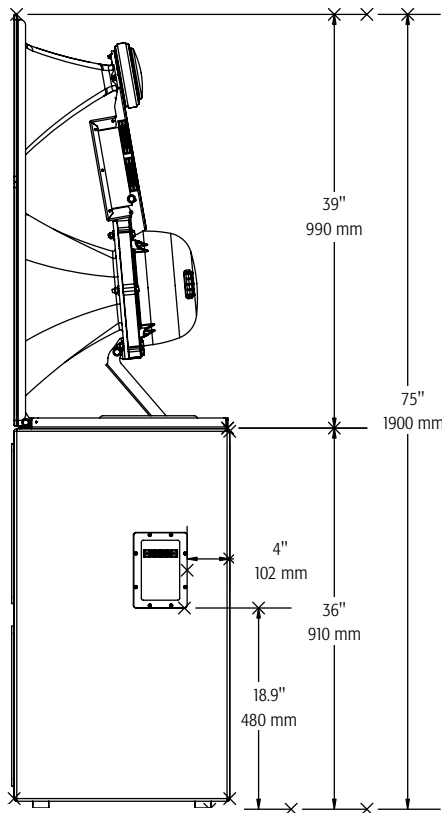

Specifications subject to change without notice.