




## 902-PT SSG, LCS, CS or TS SERIES

The 902 Post Top luminaire features a frosted glass diffuser, a soft "glowing" direct component and four distinct upper shade options.

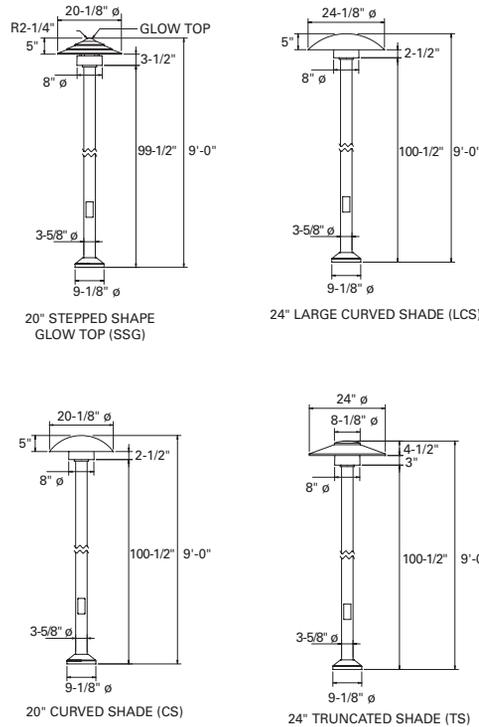

### MATERIAL

**Post and Collar:** 3 5/8" Diameter seamless pure copper tube attached to a sand cast bronze base covered by a spun copper alloy cover. Sand cast collar with an acrylic (CFL) or frosted glass diffuser (MH & INC).

**Shade Options**, available in four shade options:

- Spun natural copper alloy large curved shade (LCS)[Dark Sky Compliant] 5" H x 24 1/8" dia.
- Spun natural copper alloy curved shade (CS) 5" H x 20 1/8" dia.
- Spun natural copper alloy stepped shade with etched glass (EG) glow top element (SSG) with optional custom color filters (CC) 5" H x 20 1/8" dia.
- Spun natural copper alloy truncated shade (TS) 4 1/2" H x 24" dia. Aluminum components are used with a painted finish.

### LAMP/SOCKET

One (1) 26W (GX24q-3 base), 32W (GX24q-3 base) or 42W (GX24q-4 base) 4-pin triple tube CFL lamp or one (1) 70W ED-17 metal halide lamp or one (1) 150W A-21 incandescent lamp. CFL socket injection molded plastic. MH and INC socket fired ceramic rated for 4KV. Lamps furnished by others.

### BALLAST

One (1) low temperature (0°F,-18°C) AC electronic CFL multi-watt, multi-volt 120/277V (347V-Canada) ballast. One (1) 70W electronic metal halide ballast. CFL and MH electronic ballast mounted in post.


### INSTALLATION

Pole mounted on an EPDM pad with three 3/4"-10 UNC-2A X 18" J-bolts on a 6 1/2" dia. olt circle. Three conduit feeds in base (by others). Wiring connection via hand hole in post (ground lug at hand hole). Supplied with mounting pad, bolts, mounting hardware and template.

### FINISH AND OPTIONS

See page 1020 for finish details and options.

### MOUNTING DETAILS



Sample Number: 902-PT-SSG-MH/1/70-277V-GRM-GM-EG-14

| Series                            | Style                        | Lamp               | Voltage           | Post Finish <sup>2</sup> | Finish <sup>2</sup>         | Glow Top Element <sup>3</sup> | Mounting Height          | Options         |
|-----------------------------------|------------------------------|--------------------|-------------------|--------------------------|-----------------------------|-------------------------------|--------------------------|-----------------|
| 902-PT = Multiple Shade Luminaire | CS = Curved Shade            | CFL/1              | 120V              | CA (standard),           | CA                          | EG = Etched Glass             | 8'                       | BS <sup>4</sup> |
|                                   | LCS = Large Curved Shade     | (26/32/42W-Triple) | 277V              | BK, BM, CC,              | (standard),                 | ___ = Not Available           | 9'                       |                 |
|                                   | SSG = Stepped Shade Glow Top | MH/1/70            | 347V <sup>1</sup> | DP, GM, GRM,             | BK, BM, CC,                 |                               | 10'                      |                 |
|                                   | TS = Truncated Shade         |                    |                   | GY, SM, WH               | DP, GM, GRM, GY, SM, VG, WH |                               | 11'<br>12'<br>13'<br>14' |                 |

#### Notes:

- 1 Available with CFL only.
- 2 Copper alloy or premium TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear.
- 3 Available with Stepped Shade Glow Top (SSG) only.
- 4 Consult the factory for available options.