

ELLISSE OVAL™ PREMIUM AIR BATH

2709.328 Premium Air Bath

- Smooth Air™ massage system with perfectly smooth air jets throughout tub bottom
- Programmable automatic purge with time
- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- 1.0 HP variable speed, heated blower
- Factory installed power cord with plug
- Deck-mounted electronic control
- Drain and overflow in Chrome included
- EverClean® System

2709.328.K2 Premium Air Bath with Chromatherapy

Same as 2709.328 but also includes:

- Two digitally controlled lights
- Electronic control with color selector and color cycle function

Nominal Dimensions:

69-1/4" x 38-1/2" x 19-3/4"
(1759 x 978 x 502mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate a patented silver-ion additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS AND SPECIFICATIONS





To Be Specified - Required:

- Color:
- Drain included (chrome)
- Other Bath Faucet (specify finish):
- Grab Bar Kit: 9827-200 two per kit (specify finish):

To Be Specified - Optional:

- Apron: 9460.018 (specify color)
- Tile Bead Kit: 751755-200
- Drain Trim Kit: 1585.200 (specify finish)
- Air Blower Remote Mounting Kit: 754025-0071A

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

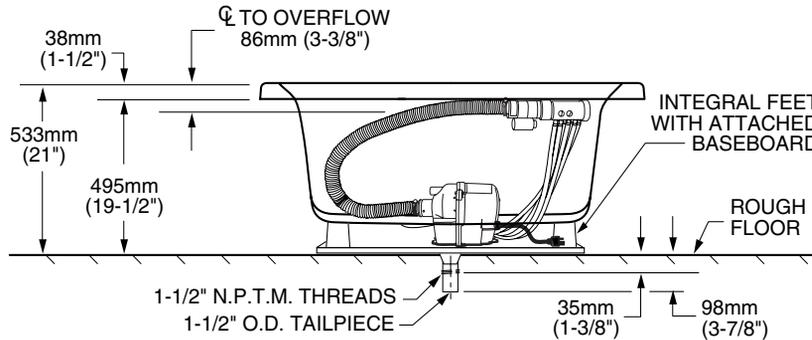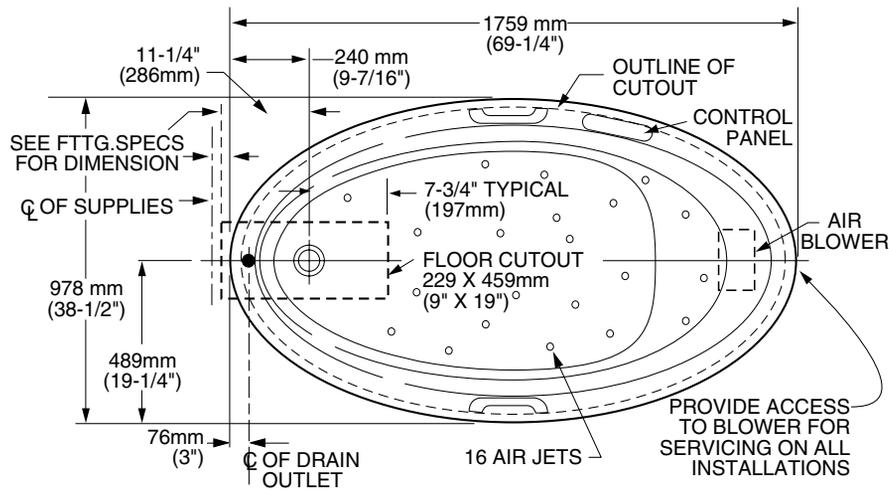

| GENERAL SPECIFICATIONS FOR 2709 AIR BATH | |
|--|---|
| INSTALLED SIZE | 69-1/4 x 38-1/2 x 19-3/4 In. (1759 x 978 x 502mm) |
| WEIGHT | 107 Lbs. (49 Kg.) |
| WEIGHT w/WATER | 640 Lbs. (291 Kg.) |
| GAL. TO OVERFLOW | 64 Gal. (243 L) |
| BATHING WELL AT SUMP | 45 x 23 In. (1143 x 584mm) |
| BATHING WELL AT RIM | 63 x 32 In. (1600 x 813mm) |
| WATER DEPTH TO OVERFLOW | 13 In. (330mm) |
| FLOOR LOADING | 35 Lbs./Sq.Ft. (166 Kgs./Sq.m) |
| (PROJECTED AREA) | |
| PTS. | 25.6 |
| CUBE (FT ³) | 49.4 |
| ELECTRICAL SPECIFICATIONS | |
| BLOWER | 1.0 HP, 10 AMPS, 120V. |

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY INTEGRAL FEET. NO ADDITIONAL SUPPORT IS REQUIRED. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH FOR ADDITIONAL INFORMATION.

▲ CUTOUT TEMPLATE PROVIDED IN SHIPPING BOX. MAY BE REQUESTED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 / CSA Certified. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.