

CADET CORNER WHIRLPOOL & BATHING POOL

2775.018W Whirlpool featuring System I

- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Dual, backrest positions
- Molded-in arm rests
- 2.0 HP single speed, self-draining pump/motor
- Factory installed power cord with plug
- Eight multi-directional and flow-adjustable jets including:
 - Two Ideal-flow jets
 - Two body massage jets
 - Four recessed back-rest jets (two in each backrest)
- Deck-mounted air switch On/Off
- Two silent air volume controls
- Quick Connect Safe-T-Heater connection system
- Factory installed and tested whirlpool system

2775.018WC Stay Clean™ Whirlpool Massage Featuring System I:

- Same as 2775.018W except with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®

2775.002 Bathing Pool only

Nominal Dimensions: 2159 x 1524 x 502mm
(85" x 60" x 19-3/4")

**Compliance Certifications -
Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density



To Be Specified - Required:

- Color:
- Bath Filler: (specify finish)
- Bath Drain: 1583.470 (specify finish)





To Be Specified - Optional:

- Safe-T-Heater*: 9075.120
- Jet Trim Ring Kit: 9860.200-two per kit (Specify finish)
- Universal Tile Bead Kit: 751755-100
- Grab Bar Kit: 9822.200-two per kit (specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

* **NOTE:** the Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

NOTE: Roughing-in dimensions and product specifications shown on reverse side of page.

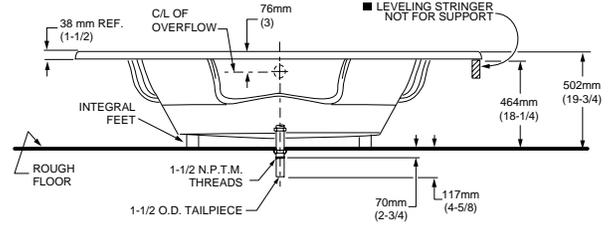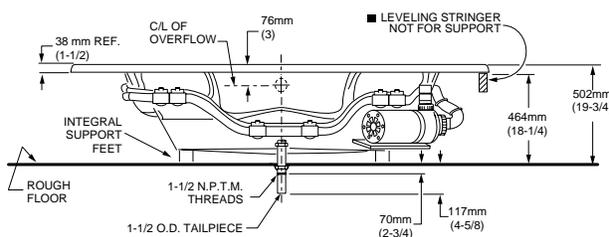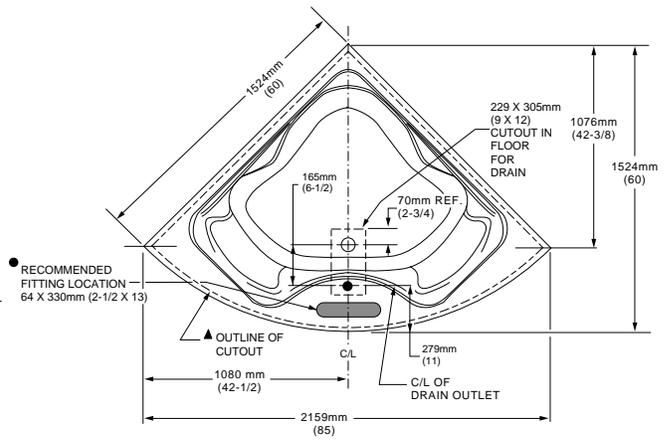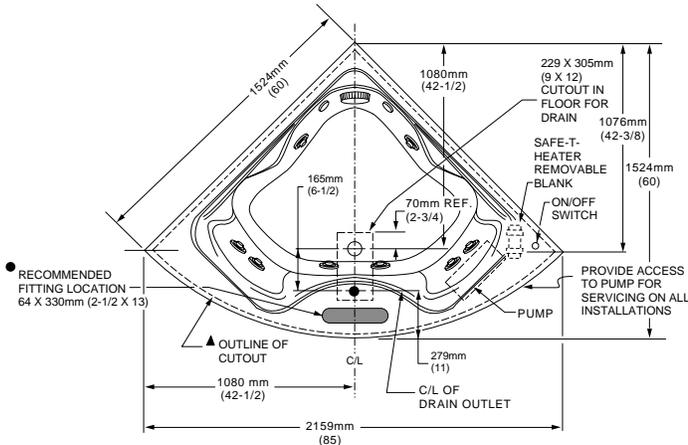

GENERAL SPECIFICATIONS FOR 2775 WHIRLPOOL

INSTALLED SIZE _____ 85 X 60 X 19-3/4in. (2159 X 1524 X 502mm)
 WEIGHT _____ 130 Lbs. (59 Kg.)
 WEIGHT w/WATER _____ 756 Lbs. (343 Kg.)
 GAL. TO OVERFLOW _____ 75 Gal. (284 L.)
 MIN. OPERATING GAL. _____ 60 Gal. (227 L.)
 BATHING WELL AT SUMP _____ 32 X 32 In. (813 mm X 813 mm)
 BATHING WELL AT RIM _____ 46 X 46 In. (1168 X 1168mm)
 WATER DEPTH TO OVERFLOW _____ 14 In. (356 mm)
 FLOOR LOADING _____ 34 Lbs./Sq. Ft. (115 Kgs/Sq. m.)
 (PROJECTED AREA)
 PTS. _____ 41.7
 CUBE (FT³) _____ 70.4

WHIRLPOOL ELECTRICAL SPECIFICATIONS

SYSTEM I PUMP _____ 2.1 HP, 14.4 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 2775 BATHING POOL

INSTALLED SIZE _____ 85 X 60 X 19-3/4in.
 (2159mm X 1524 mm X 502mm)
 WEIGHT _____ 105 Lbs. (48 Kg.)
 WEIGHT w/WATER _____ 730 Lbs. (328 Kg.)
 GAL. TO OVERFLOW _____ 75 Gal. (284 L.)
 BATHING WELL AT SUMP _____ 32 X 32 In. (813 mm X 813 mm)
 BATHING WELL AT RIM _____ 46 X 46 In. (1168 X 1168mm)
 WATER DEPTH TO OVERFLOW _____ 14 In. (356 mm)
 FLOOR LOADING _____ 33 Lbs./Sq. Ft. (111 Kgs/Sq. m.)
 (PROJECTED AREA)
 PTS. _____ 41.7
 CUBE (FT³) _____ 70.4

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 2 WALL TILING BEAD KIT AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1/A112.19.7M.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.