

COLONY 5' x 42" WHIRLPOOL AND BATHING POOL with INTEGRAL APRON


- 1749.218 Whirlpool featuring System I, Left Hand Outlet**
- 1749.118 Whirlpool featuring System I, Right Hand Outlet**
 - Acrylic with fiberglass reinforcement
 - Integral apron with tile flange and removable access panels
 - Integral 3-sided tile/water retention flange
 - Molded-in back rest
 - Dual, molded in arm rests
 - 1.0 HP single speed, self-draining pump/motor
 - Factory installed power cord with plug
 - Six multi-directional and flow-adjustable jets
 - Side-mounted air switch On/Off
 - Two air volume controls
 - Factory installed and tested whirlpool system



Shown: Whirlpool with Removable Panels

StayClean™ Whirlpool Massage featuring System I

- 1749.218C Whirlpool featuring System I, Left Hand Outlet**
 - 1749.118C Whirlpool featuring System I, Right Hand Outlet**
 - Same as above except with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®
 - 1749.202 Bathing pool only, Left Hand Outlet**
 - 1749.102 Bathing pool only, Right Hand Outlet**
 - Removable access panel not available on bathing pool only
- Nominal Dimensions: (60" x 43-1/2" x 20-1/4")
1525 x 1105 x 515mm

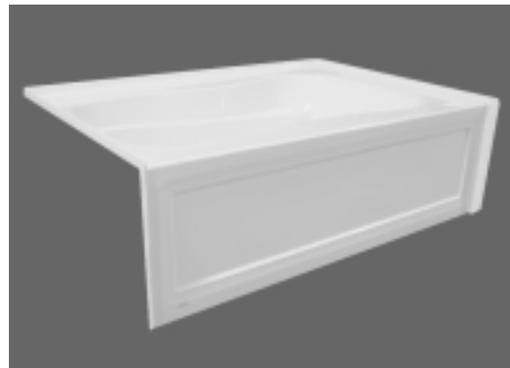

Shown: Bathing Pool less Removable Panels

- Compliance Certifications - Meets or Exceeds the Following Specifications:**
- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
 - ASME A112.19.7M for Whirlpool Appliances
 - ANSI Z124.1 for Plastic Bathtubs
 - ASTM E162 for Flammability
 - NFPA 258 for Smoke Density

NOTE: Roughing-in dimensions and product specifications shown on reverse side of page.

To Be Specified - Required:



- Color:

Required Components (not included):

- Bath Drain: 1583.470 *
- Bath Filler: *

* See your American Standard Distributor

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

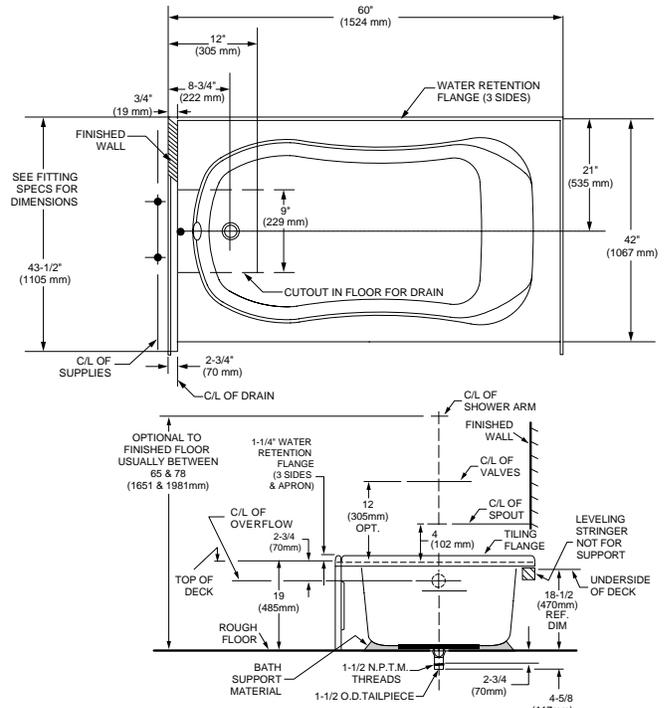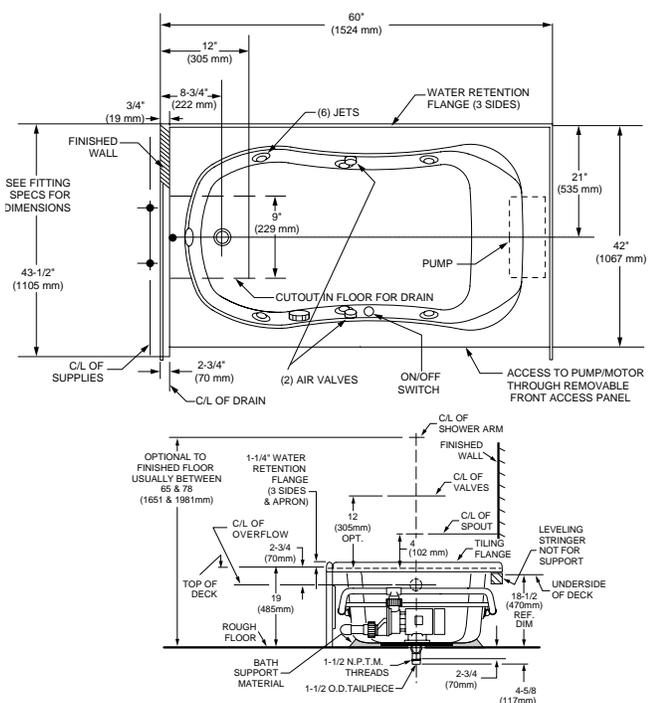

GENERAL SPECIFICATIONS FOR 1749 WHIRLPOOL

INSTALLED SIZE	60 x 42 x 19 In. (1525 x 1067 x 483mm)
WEIGHT	112 Lbs. (50 Kg.)
WEIGHT w/WATER	714 Lbs. (324 Kg.)
GAL. TO OVERFLOW	72 Gal. (274 L)
WHIRLPOOL MIN. OPERATING VOL.	52 Gal. (197 L)
BATHING WELL AT SUMP	44 x 23 In. (1120 x 585mm)
BATHING WELL AT RIM	54 x 26 In. (1370 x 660mm)
WATER DEPTH TO OVERFLOW	13-5/8 In. (346mm)
FLOOR LOADING (PROJECTED AREA)	41 Lbs./Sq.Ft. (193 Kgs./Sq.m)

WHIRLPOOL ELECTRICAL SPECIFICATIONS

PUMP 1.0 HP, 9.9 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 1749 BATHING POOL

INSTALLED SIZE	60 x 42 x 19 In. (1525 x 1067 x 483mm)
WEIGHT	92 Lbs. (42 Kg.)
WEIGHT w/WATER	714 Lbs. (324 Kg.)
GAL. TO OVERFLOW	72 Gal. (274 L)
BATHING WELL AT SUMP	44 X 23 In. (1120 x 585mm)
BATHING WELL AT RIM	54 x 26 In. (1370 x 660mm)
WATER DEPTH TO OVERFLOW	13-5/8 In. (346mm)
FLOOR LOADING (PROJECTED AREA)	41 Lbs./Sq.Ft. (193 Kgs./Sq.m)

NOTES:

BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS (1749.118).

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standards Z124.1 and A112.19.7. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.