

**REMINISCENCE DROP-IN WHIRLPOOL &
BATHING POOL**

- 2908.018W Whirlpool featuring System I**
 - Acrylic with fiberglass reinforcement
 - Pre-leveled tub bottom
 - Sculptured rim design w/raised headrest
 - Dual, molded-in arm rests
 - Faucet deck/accessory area at drain end
 - 1.5 HP single speed, self-draining pump/motor
 - Factory installed power cord with plug
 - Eight multi-directional and flow-adjustable jets including:
 - Two Ideal-flow jets at foot area
 - Four body massage jets
 - Two recessed back-rest jets
 - Deck-mounted, air switch On/Off
 - Two silent air volume controls
 - Quick Connect Safe-T-Heater connection system
 - Factory installed and tested whirlpool system
- 2908.018WC StayClean™ Whirlpool Massage featuring System I**
 - Same as 2908.018W except with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®
- 2908.028W Whirlpool featuring System II**

Same as 2908.018W except:

 - 2.0 HP, two speed, self-draining pump/motor with pulse feature
 - Deck-mounted electronic control with 20 minute built-in timed safety shut off and Chrome bezel
- 2908.028WC StayClean™ Whirlpool Massage featuring System II**
 - Same as 2908.028W except with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®
- 2908.002 Bathing Pool only**

Nominal Dimensions: 66" x 36" x 24-1/4"
(1676 x 914 x 616mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density



To Be Specified - Required:

- Color:
- Bath Faucet (Specify finish)
- Bath Drain: 1583.470 (Specify finish)



To Be Specified - Optional:

- Safe-T-Heater*: 9075.120
- Jet Trim Ring Kit: 9860.200-two per kit (Specify finish) for Body Massage Jets only
- System II Control Bezel: 9861.100 (Specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

* **NOTE:** the Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

NOTE: Roughing-in dimensions and product specifications shown on reverse side of page.

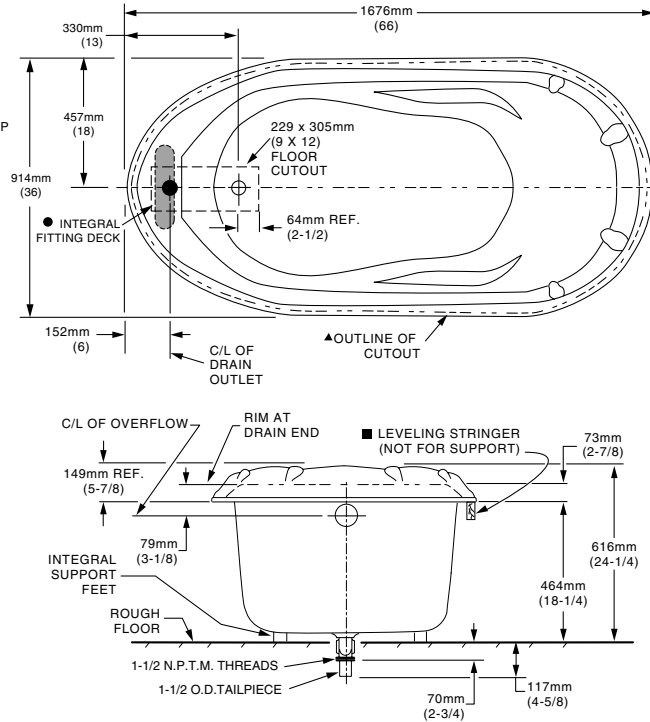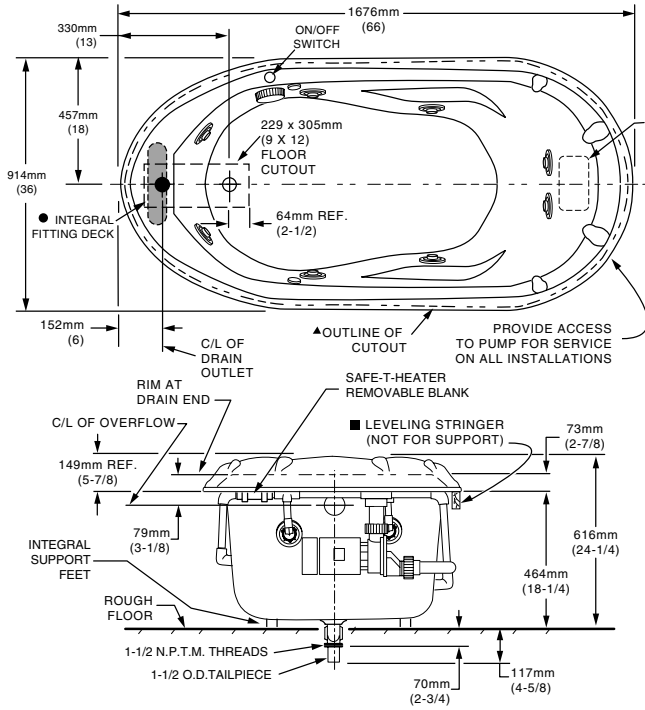

GENERAL SPECIFICATIONS FOR 2908 WHIRLPOOL

INSTALLED SIZE _____ 66 x 36 x 24-1/4 In. (1676 x 914 x 616mm)
 WEIGHT _____ 95 Lbs. (43 Kg.)
 WEIGHT w/WATER _____ 659 Lbs. (299 Kg.)
 GAL. TO OVERFLOW _____ 68 Gal. (257 L.)
 MIN. OPERATING GAL. _____ 55 Gal. (208 L.)
 BATHING WELL AT SUMP _____ 40 x 18 In. (1016 x 457mm)
 BATHING WELL AT RIM _____ 53 x 28 In. (1330 x 718mm)
 WATER DEPTH TO OVERFLOW _____ 15 In. (381mm)
 FLOOR LOADING _____ 40 Lbs./Sq. Ft. (191 Kgs/Sq. m.)
 (PROJECTED AREA)
 PTS. _____ 23.8
 CUBE (FT³) _____ 44.5

WHIRLPOOL ELECTRICAL SPECIFICATIONS

SYSTEM I PUMP _____ 1.6 HP, 9.7 AMPS, 120V.
 SYSTEM II PUMP _____ 2.1 HP, 15.6 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 2908 BATHING POOL

INSTALLED SIZE _____ 66 x 36 x 24-1/4 In.
 (1676mm x 914 mm x 616mm)
 WEIGHT _____ 95 Lbs. (43 Kg.)
 WEIGHT w/WATER _____ 659 Lbs. (299 Kg.)
 GAL. TO OVERFLOW _____ 68 Gal. (257 L.)
 BATHING WELL AT SUMP _____ 40 x 18 In. (1016 x 457mm)
 BATHING WELL AT RIM _____ 53 x 28 In. (1330 x 718mm)
 WATER DEPTH TO OVERFLOW _____ 15 In. (381mm)
 FLOOR LOADING _____ 39 Lbs./Sq. Ft. (187 Kgs/Sq. m.)
 (PROJECTED AREA)
 PTS. _____ 23.8
 CUBE (FT³) _____ 44.5

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED.

- REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.