



If you enjoy a uniquely gentle, calming experience that caresses the body and soothes the mind, the Elara™ air bath is right for you.

**FEATURES:**

- Exclusive 360° Balanced Airflow™ system
- 800-watt variable speed heated air blower
- Timed purge cycle
- Safely use salts and aromatic oils
- Flexible drop-in or undermount installation options
- Low-profile deck
- Wave Pulse™ system
- ProO<sub>3</sub>™ Cleansing System standard

**Elara™ 7242  
PURE AIR® BATH**

**MODEL NUMBER:**

GA30 (Left-hand)  
GA40 (Right-hand)

**EXTERIOR DIMENSIONS:**

72" long x 42" wide x  
26" high

**OPERATING GALLONS:**

66-105 gallons






## Elara™ 7242 PURE AIR® BATH

<b>GA30</b>	Elara™ 7242 Pure Air® Bath, Left Hand
<b>GA40</b>	Elara™ 7242 Pure Air® Bath, Right Hand

- Right and Left Hand Drain Location
- Accessories / Hardware:  
Sch 40, Rotoary Drain Kit: #DA34
- Trim Kit Finishes Available:
  - (827) – Chrome
  - (898) – Brushed Chrome
  - (815) – Satin Nickel
  - (829) – Bright Brass
  - (805) – Platinum
  - (826) – Brushed Nickel
  - (845) – Oil Rubbed Bronze

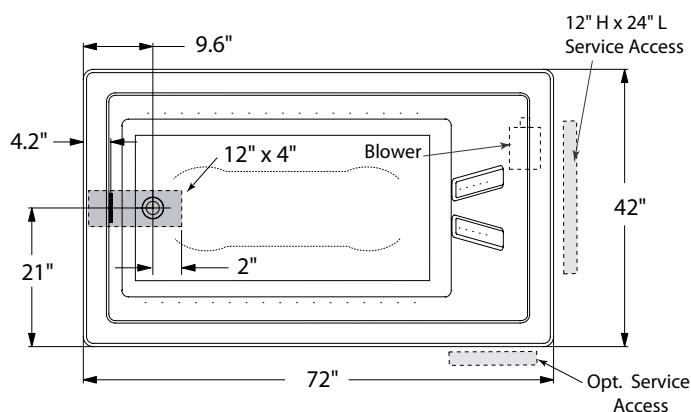

**Product Shown: Elara™ 7242 Pure Air®  
Left Hand Model: GA30**

*\* Measurements inside unit represent  
cutout in floor to allow for drain/overflow.*

### INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

### Technical Specifications

#### DIMENSIONS

72" L x 42" W x 26" H  
(1829) mm L x (1067) mm W x (660) mm H

#### DRAIN/OVERFLOW

A: 18-1/2" (470 mm) B: 10.6" (269 mm)

#### CUTOUT

70" x 40" & undermount template BZ50000

#### TOTAL WEIGHT

1345 lb. (610 kg) / 64 lb/ft<sup>2</sup> (312 kg/m<sup>2</sup>)

#### OPERATING GALLONAGE

86 U.S. Gal. (326 Liters)  
Min 66 U.S. Gal. (250 liters)  
Max 105 U.S. Gal. (397 liters)

#### PRODUCT WEIGHT

215 lb (98 kg)

#### SKIRT MOUNTING

Not Available

#### ELECTRICAL SPECIFICATIONS

**Requires a dedicated GFCI protected separate circuit.**

Blower: 120 VAC, 15 AMP, 60 Hz.

#### HEATER (STANDARD)

No water heater is available on this unit. Blower has integral air heater.

