



An allusion is a “hint,” a “reference.” The Allusion® Salon™ Spa bath is a true glimpse of the good life. With clean, contemporary, minimalist lines, the Allusion® family of products makes a striking statement — one that speaks to more than a hint of style.

FEATURES:

- Multi-speed motor
- 4 fully adjustable TheraPro™ jets
- 6 fully adjustable back jets
- 800 watt variable speed heated air blower
- Bottom air channels for maximum massage
- 256 color Chromatherapy lighting system
- Illumatherapy optional
- Drain-assist purge system
- Water-level sensor
- RapidHeat™ inline heater
- All-in-one electronic control panel
- ProO₃™ Ozone Sanitation System standard



Allusion® 7236 SALON™ SPA with CHROMATHERAPY

MODEL NUMBER:
BK20

EXTERIOR DIMENSIONS:
72" long x 36" wide x
26" high

OF JETS/TYPE OF JETS:
4 TheraPro™ Jets
6 AccuPro™ Jets

OPERATING GALLONS:
75 gallons

Allusion® 7236 SALON™ SPA with ILLUMATHERAPY™

MODEL NUMBER:
BT70

EXTERIOR DIMENSIONS:
72" long x 36" wide x
26" high

OF JETS/TYPE OF JETS:
4 TheraPro™ Jets
6 AccuPro™ Jets

OPERATING GALLONS:
75 gallons



Allusion® 7236 SALON™ SPA BATH

BK20	Allusion® 7236 Salon™ Spa Left Hand with Chromatherapy lighting
BT70	Allusion® 7236 Salon™ Spa Right Hand with Illumatherapy™ jet lighting

- Left and Right Hand Drain Location
- Accessories / Hardware:
HTC Jet Trim Kit: #D095

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

72" L x 36" W x 26" H
(1829 mm) L x (914 mm) W x (660 mm) H

DRAIN/OVERFLOW

A: 17-3/8" (441 mm) B: 11-15/16" (210 mm)

CUTOUT

Template Provided Part Number: BY20000

TOTAL WEIGHT

1001 lb (454 kg) / 56 lb/sq. ft. (272 kg/m²)

OPERATING GALLONAGE

75 U.S. Gal. (284 Liters)
Min. 65 U.S. Gal. (246 Liters)
Max. 85 U.S. Gal. (322 Liters)

PRODUCT WEIGHT

220 lb (100 kg)

SKIRT MOUNTING

Not Available

ELECTRICAL SPECIFICATIONS


All require a dedicated GFCI protected separate circuit(s).

Blower: 120VAC, 20AMP, 60 Hz. .

Motor/Pump and RapidHeat™: 240VAC, 20AMP, 60 Hz.

HEATER (STANDARD)


RapidHeat™: P/N BN60000

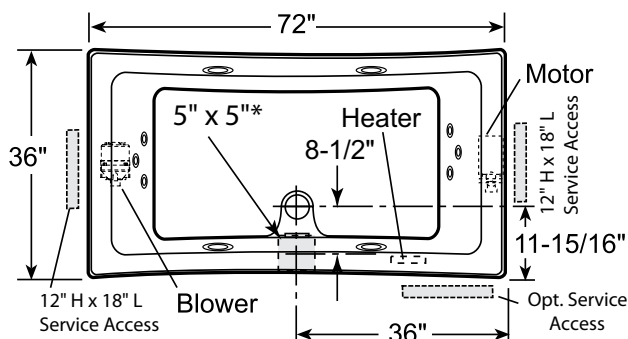


Product Shown: Allusion® 7236 Salon™ Spa Right Hand (BK20) Shown.

* Measurements inside unit represent cutout in floor to allow for drain/overflow.

Minimum Service Access dimensions given.

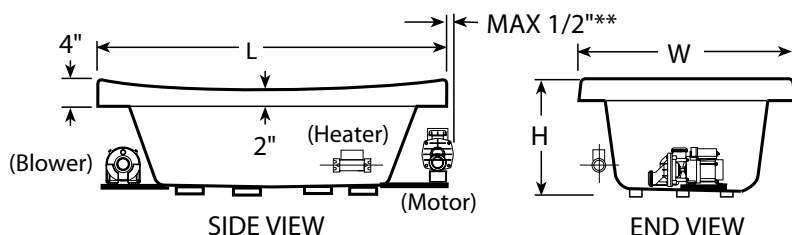

ALLUSION SIDE END



DRAIN/OVERFLOW

*** See Install manual for installations instructions.