

**COLONY 5' x 30" WHIRLPOOL AND BATHING  
POOL with INTEGRAL APRON**

2740.118 Whirlpool, Right Hand Outlet

2740.218 Whirlpool, Left Hand Outlet

**Product Features:**

- High Gloss Acrylic with fiberglass reinforcement
- Integral apron with removable access panel
- Integral three-sided, tiling/water retention flange
- Integral lumbar support
- Molded-in arm rests with elbow supports
- Safety textured tub bottom pattern

Factory installed and tested whirlpool system featuring:

- Rigid P.V.C. piping
- 1 H.P. self-draining pump/motor with Dry Run seal
- Six multi-direction jets
- One air volume control
- Anti-vortex suction fitting
- Deck mounted air switch On/Off control
- U.L.® Listed entire whirlpool system

2740.102 Bath only, Right Hand Outlet

2740.202 Bath only, Left Hand Outlet

- Same as above without whirlpool system

Nominal Dimensions:

(59-7/8" x 29-7/8" x 19-1/4")

1521 x 759 x 489mm

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density





**To Be Specified - :**

- Color:
- Bath/Shower Faucet\*:
- Faucet Finish:
- Bath Drain: 1553.270
  - 002 Chrome  099 Polished Brass

\* See faucet section for models available

**NOTE:** Roughing-in dimensions and product specifications shown on reverse side of page.

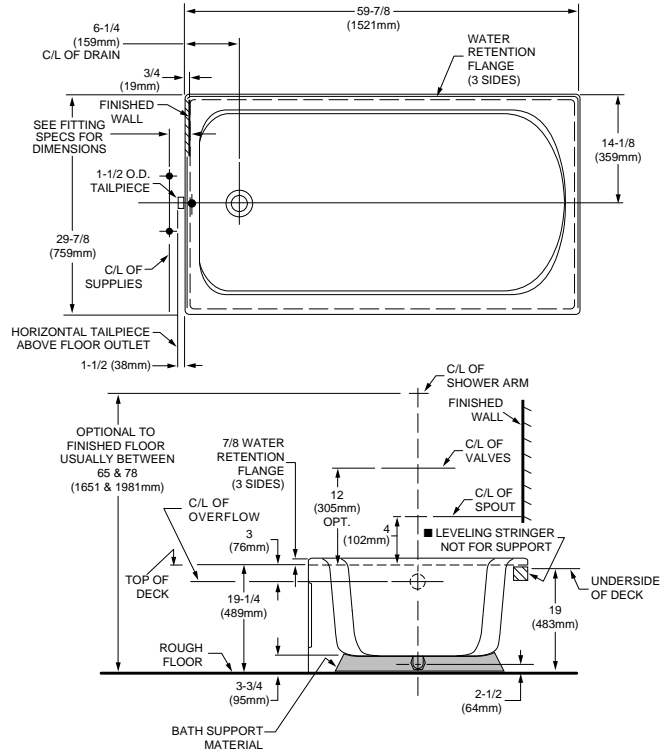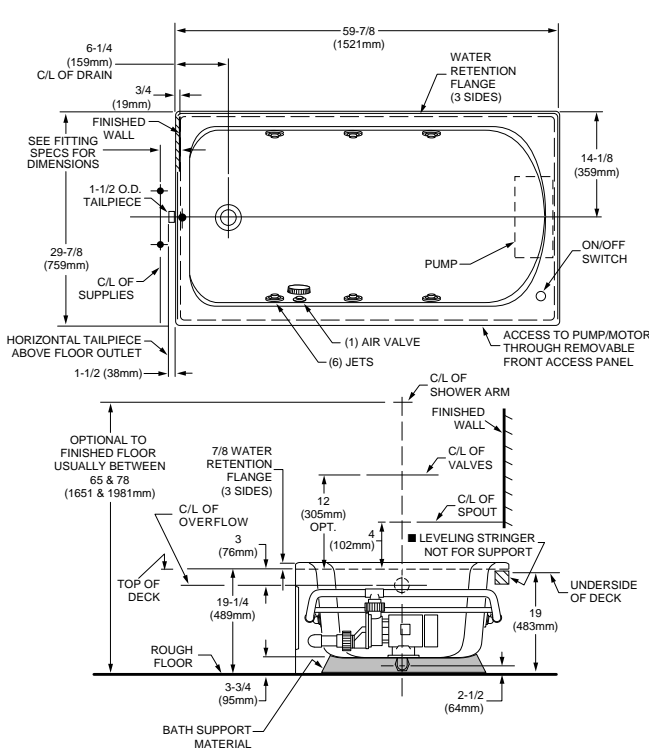

GENERAL SPECIFICATIONS FOR 2740 WHIRLPOOL	
INSTALLED SIZE	59-7/8 x 29-7/8 x 19-1/4 (1521 x 759 x 489mm)
WEIGHT	105 Lbs. (47 Kgs.)
WEIGHT w/WATER	480 Lbs. (216 Kgs.)
GAL. TO OVERFLOW	45 Gal. (171 L)
WHIRLPOOL MIN. OPERATING VOL.	38 Gal. (144 L)
BATHING WELL AT SUMP	20 x 46 (508 x 1168mm)
BATHING WELL AT RIM	25-1/2 x 55-1/2 (648 x 1410mm)
WATER DEPTH TO OVERFLOW	11-1/2 (292mm)
FLOOR LOADING (PROJECTED AREA)	39 Lbs./Sq.Ft. (188 Kgs./Sq.m)
PTS.	16.7
CUBE (FT <sup>3</sup> )	33.0
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
SYSTEM I PUMP	1 HP, 9.9 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 2740 BATHING POOL	
INSTALLED SIZE	59-7/8 x 30 x 19-1/4 (1521 x 762 x 489mm)
WEIGHT	70 Lbs. (32 Kgs.)
WEIGHT w/WATER	462 Lbs. (208 Kgs.)
GAL. TO OVERFLOW	47 Gal. (178 L)
BATHING WELL AT SUMP	20 x 46 (508 x 1168mm)
BATHING WELL AT RIM	25-1/2 x 55-1/2 (648 x 1410mm)
WATER DEPTH TO OVERFLOW	11-1/2 (292mm)
FLOOR LOADING (PROJECTED AREA)	37 Lbs./Sq.Ft. (179 Kgs./Sq.m)
PTS.	16.7
CUBE (FT <sup>3</sup> )	33.0

**NOTES:**

- BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION.
- REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.
- BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION.
- LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS (2740.118).
- FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
- PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standards Z124.1 and A112.19.7. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.