

SCALA OVAL 5-1/2' WHIRLPOOL & BATHING POOL

- 2645.018 Whirlpool featuring System I**
 - Acrylic with fiberglass reinforcement
 - Pre-leveled tub bottom
 - Molded-in lumbar back rest
 - Factory installed and tested whirlpool system
 - 1.0 HP single speed, self-draining pump/motor
 - Factory-installed power cord with plug
 - Six multi-directional color-coordinated jets
 - Deck-mounted air switch On/Off
 - Two air volume controls
 - Factory installed and tested whirlpool system

- 2645.018C Stay Clean™ Whirlpool Massage Featuring System I:**
 - Same as 2645.018 except with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®

- 2645.002 Bathing Pool only**

Nominal Dimensions: 1676 x 914 x 502mm
(66" x 36" x 19-3/4")



**Compliance Certifications -
Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

To Be Specified - Required:



- Color:
- Bath Filler: (specify finish)
- Bath Drain: 1583.470 (specify finish)

To Be Specified - Optional:

- 5-1/2 Foot Acrylic Apron: 9366.018 (specify color)
- 5-1/2 Foot Apron: 9266.018 (specify color)
- Jet Trim Ring Kit: 9860.200-two per kit (Specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

NOTE: Roughing-in dimensions and product specifications shown on reverse side of page.

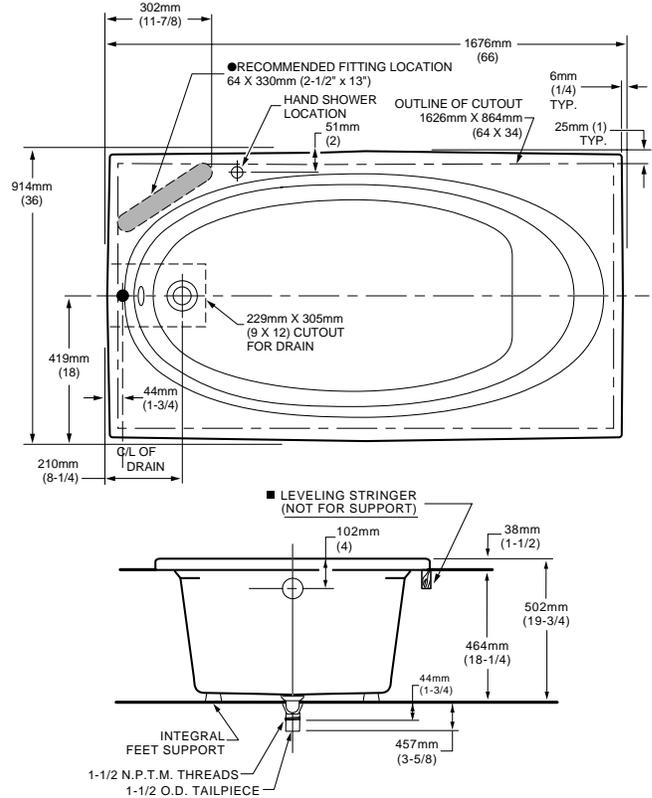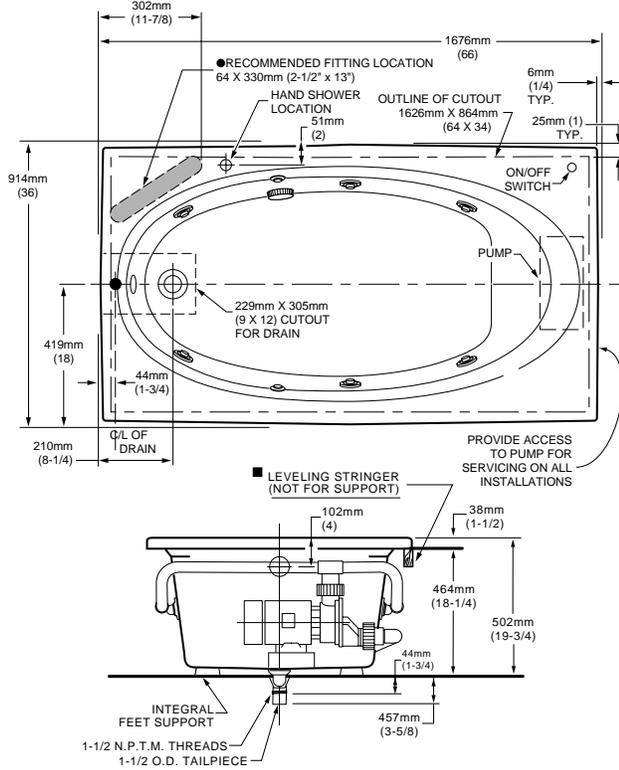

GENERAL SPECIFICATIONS FOR 2645 WHIRLPOOL

INSTALLED SIZE	66 x 36 x 19-3/4 In. (1676 x 914 x 502mm)
WEIGHT	95 Lbs. (43 Kg.)
WEIGHT w/WATER	595 Lbs. (268 Kg.)
GAL. TO OVERFLOW	60 Gal. (227 L)
WHIRLPOOL MIN. OPERATING VOL.	55 Gal. (208 L)
BATHING WELL AT SUMP	46 x 24 In. (1168 x 610mm)
BATHING WELL AT RIM	62 X 31-1/2 In. (1575 x 800mm)
WATER DEPTH TO OVERFLOW	13-1/4 In. (337mm)
FLOOR LOADING (PROJECTED AREA)	36 Lbs./Sq.Ft. (175 Kgs./Sq.m)
PTS.	25.6
CUBE (FT ³)	45.1
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
SYSTEM I PUMP	1.1 HP, 9.9 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 2645 BATHING POOL

INSTALLED SIZE	66 x 36 x 19-3/4 In. (1676 x 914 x 502mm)
WEIGHT	75 Lbs. (34 Kg.)
WEIGHT w/WATER	575 Lbs. (259 Kg.)
GAL. TO OVERFLOW	60 Gal. (227 L)
BATHING WELL AT SUMP	46 x 24 In. (1168 x 610mm)
BATHING WELL AT RIM	62 X 31-1/2 In. (1575 x 800mm)
WATER DEPTH TO OVERFLOW	13-1/4 In. (337mm)
FLOOR LOADING (PROJECTED AREA)	35 Lbs./Sq.Ft. (169 Kgs./Sq.m)
PTS.	25.6
CUBE (FT ³)	45.1

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

- REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION. OPTIONAL APRON 9266.018 OR 9366.018 AVAILABLE AND MUST BE ORDERED SEPARATELY. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
 - IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.
- PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.
- IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.