Panasonic®

Operating Instructions Air Conditioner

Model No.	
Indoor Unit	Outdoor Unit
CS-S9NKUA	CU-S9NKUA
CS-S12NKUA	CU-S12NKUA



ENGLISH Before operating the unit, read these operating instructions thoroughly and keep them for future reference.



QUICK GUIDE

© Panasonic Appliances Air-Conditioning Malaysia Sdn. Bhd. 2012. Unauthorized copying and distribution is a violation of law. Thank you for purchasing Panasonic Air Conditioner

TABLE OF CONTENTS
SAFETY PRECAUTIONS 2~3
REMOTE CONTROL 4~5
INDOOR UNIT 6
TROUBLESHOOTING 7
INFORMATION 8
QUICK GUIDE BACK COVER

NOTE

The illustrations in this manual are for explanation purposes only and may differ from the actual unit. They are subjected to change without notice for future improvement.

OPERATION CONDITION

Use this air conditioner under the following temperature range

Temperature (°F)		Indoor	
		*DBT	*WBT
COOLING	Max.	89.6	73.4
COOLING	Min.	60.8	51.8
Temperature (°F)		Outdoor	
		*DBT	*WBT

			1101	
COOLING	Max.	109.4	78.8	
COOLING	Min.	5.0	-	
* DBT: Dry bulb temperature				

* WBT: Wet bulb temperature


POWER SUPPLY

Models Number	Time Delay Circuit Breaker	Rated Volts
CS/CU-S9NKUA	15 Amps	208/
CS/CU-S12NKUA	15 Amps	230V

SAFETY PRECAUTIONS


To prevent personal injury, injury to others, or property damage, please comply with the following.


Incorrect operation due to failure to follow instructions below may cause harm or damage, the seriousness of which is classified as below:

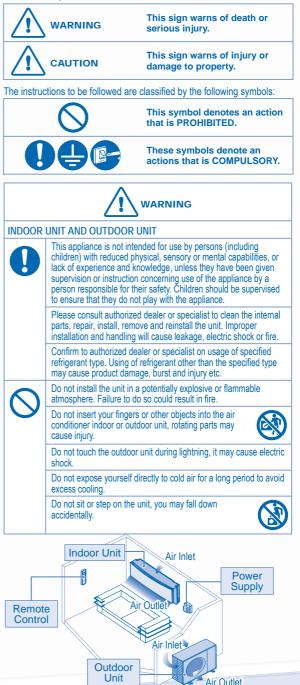

REM	IOTE CONTROL	INDOOR UNIT AND OUTDOOR UNIT	
6	Do not allow infants and small children to play with the remote control to prevent them from accidentally swallowing the batteries.	Do not wash the indoor unit with water, benzene, thinner or scouring powder to avoid damage or corrosion at the unit.	
POW	/ER SUPPLY Do not use a modified cord,	Do not use for preservation of precise equipment, food, animals, plants, artwork or other objects. This may cause quality deterioration, etc.	
0	joint cord, extension cord or unspecified cord to prevent overheating and fire.	Do not use any combustible equipment in front of the airflow outlet to avoid fire propagation.	
	To prevent overheating, fire or electric shock: • Do not share the same power outlet with other	Do not expose plants or pet directly to airflow to avoid injury, etc.	
	equipment.Do not operate with wet hands.Do not over bend the power supply cord.	Do not touch the sharp aluminium fin, sharp parts may cause injury.	
	If the supply cord is damage, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.	Do not switch ON the indoor unit when waxing the floor. After waxing, aerate the room properly before operating the unit.	
	It is strongly recommended to install this unit using an Earth Leakage Circuit Breaker (ELCB) or Ground Fault Interrupt (GFCI) or Appliance	Do not install the unit in oily and smoky areas to prevent damage to the unit.	
	Leakage Current Interrupt (ALCI) to prevent electric shock or fire.	Do not dismantle the unit for cleaning purpose to avoid injury.	
	Stop using the product if any abnormality/failure occurs or turn off the power switch and breaker.	Do not step onto an unstable bench when cleaning the unit to avoid injury.	
	(Risk of smoke/fire/electric shock) Examples of abnormality/failure • The ELCB or GFCI or ALCI trip frequently.	Do not place a vase or water container on the unit. Water may enter the unit and degrade the insulation. This may cause an electric shock.	
	Burning smell is observed.Abnormal noise or vibration of the unit is	Do not open window or door for long time during COOL/DRY mode operation.	
	 observed. Water leaks from the indoor unit. Power cord becomes abnormally hot. Fan speed cannot be controlled. The unit stops running immediately even if it is 	Ensure drainage pipe is connected properly and keep drainage outlet clear of gutters, containers or does not immersed in water to prevent water leakage.	
	switched on for operation.The fan does not stop even if the operation is	After a long period of use or use with any combustible equipment, aerate the room regularly.	
	stopped. Contact your local dealer immediately for maintenance or repair assistance.	After a long period of use, make sure the installation rack does not deteriorate to prevent the unit from falling down.	
	This equipment must be earthed to prevent electrical shock or fire.	REMOTE CONTROL	
Y	Prevent electric shock by switching off the power:	Do not use rechargeable (Ni-Cd) batteries. It may damage the remote control.	
	 Before cleaning or servicing. Extended non-use. Abnormally strong lightning activity. 	To prevent malfunction or damage of the remote control: • Remove the batteries if the unit is not going to be used for a long period of time. • New batteries of the same type must be inserted following the polarity stated.	

REMOTE CONTROL



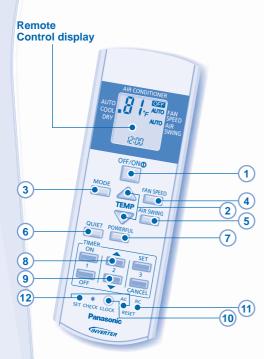

Press the remote control's button

1 TO TURN ON OR OFF THE UNIT

POWER

 Please be aware of the OFF indication on the remote control display to prevent the unit from starting/stopping improperly.

2 TO SET TEMPERATURE

- Selection range : 60°F ~ 86°F.
- Operating the unit within the recommended temperature could induce energy saving.
 COOL mode : 78°F ~ 82°F.
 DRY mode : 2°F ~ 4°F lower than room temperature.

3 TO SELECT OPERATION MODE

AUTO mode - For your convenience

- During operation mode selection the power indicator blinks.
- Unit selects operation mode every 10 minutes according to temperature setting and room temperature.

COOL mode - To enjoy cool air

- Use curtains to screen off sunlight and outdoor heat to reduce power consumption during cool mode.
- DRY mode To dehumidify the environment
- Unit operates at low fan speed to give a gentle cooling operation.

4 TO SELECT FAN SPEED (5 OPTIONS)

(----,

- FAN SPEED
- For AUTO, the indoor fan speed is automatically adjusted according to the operation mode.


5 TO ADJUST VERTICAL AIRFLOW DIRECTION (5 OPTIONS)

▶AUTO → ̄╹ → ~╹ → ↗ → ↗ → ↗ → ↗

- Keeps the room ventilated.
- In COOL/DRY mode, if AUTO is set, the louver swing up/down automatically.

6	TO ENJOY QUIET OPERATION	
• This	operation reduces airflow noise.	
7	TO REACH TEMPERATURE QUICKLY	POWERFUL

· This operation stops automatically after 20 minutes.



NOTES



- Can be activated in all modes and can be cancelled by pressing the respective button again.
 - QUIET POWERFUL
- · Cannot be selected at the same time.

TO SET THE TIMER





- To cancel ON or OFF timer, press or off then press cancel.
- When ON Timer is set, the unit may start earlier (up to 15 minutes) before the actual set time in order to achieve the desired temperature on time.
- Timer operation is based on the clock set in the remote control and repeats daily once set. For clock setting, please refer to Remote Control Preparation on the back cover.

INDOOR UNIT




 Switch off the power at the circuit breaker before cleaning. • Do not touch the aluminium fin, sharp parts may cause injury.

CLEANING INSTRUCTIONS

- · Do not use benzene, thinner or scouring powder.
- Use only soap (2 pH7) or neutral household detergent.
 Do not use water hotter than 104°F.

HINT

· To ensure optimal performance of the unit, cleaning maintenance has to be carried out at regular intervals. Dirty unit may cause malfunction and you may see error code "H99" Please consult authorized dealer

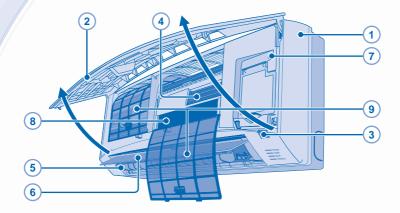

1 INDOOR UNIT

· Wipe the unit gently with a soft, dry cloth.

2 FRONT PANEL

Remove Front Panel

- · Raise and pull to remove the front panel.
- · Wash gently and dry.

Close Front Panel



 Press down both ends of the front panel to close it securely.

3 REMOTE CONTROL RECEIVER

4 **ALUMINIUM FIN**

5 HORIZONTAL AIRFLOW DIRECTION LOUVER

· Manually adjustable.



6 VERTICAL AIRFLOW DIRECTION LOUVER

· Do not adjust by hand.

7 AUTO OFF/ON BUTTON

· Use when remote control is misplaced or a malfunction occurs.

Step	Action	Mode
1	Press once.	Automatic
2	Press and hold until you hear one beep, then release.	Force cooling
3	Repeat step 2. Press and hold until you hear two beeps, then release.	Normal cooling
Press the button to turn off		

AIR PURIFYING FILTER 8



- It is recommended to clean the filter every 6 months.
- Replace the filter every 3 years or replace any damaged filter.

Part no · CZ-SA20P

9 **AIR FILTERS**

- · Air filter cleaning is required every two weeks.
- Wash/rinse the filters gently with water to avoid damage to the filter surface.
- · Dry the filters thoroughly under shade, away from fire or direct sunlight.
- Replace any damaged filters.

TROUBLESHOOTING

The following symptoms do not indicate malfunction.

SYMPTOM	CAUSE
Mist emerges from indoor unit.	Condensation effect due to cooling process.
Water flowing sound during operation.	Refrigerant flow inside the unit.
The room has a peculiar odor.	• This may be due to damp smell emitted by the wall, carpet, furniture or clothing.
Indoor fan stops occasionally during automatic fan speed setting.	This helps to remove the surrounding odours.
Operation is delayed a few minutes after restarting.	The delay is a protection to the unit's compressor.
Outdoor unit emits water/steam.	Condensation or evaporation occurs on pipes.
TIMER indicator is always on.	The timer setting repeats daily once set.
POWER indicator blinks before the unit is switched on.	• This is a preliminary step in preparation for the operation when the ON timer has been set.
Cracking sound during operation.	Changes of temperature caused the expansion/ contraction of the unit.

Check the following before calling for servicing.

SYMPTOM	CHECK
Cooling operation is not working efficiently.	 Set the temperature correctly. Close all doors and windows. Clean or replace the filters. Clear any obstruction at the air inlet and air outlet vents.
Noisy during operation.	 Check if the unit has been installed at an incline. Close the front panel properly.
Remote control does not work. (Display is dim or transmission signal is weak.)	 Insert the batteries correctly. Replace weak batteries.
The unit does not work.	 Check if the circuit breaker is tripped. Check if timers have been set.
The unit does not receive the signal from the remote control.	 Make sure the receiver is not obstructed. Certain fluorescent lights may interfere with signal transmitter. Please consult authorized dealer.

The unit stops and the TIMER indicator blinks.



Note:

• For certain errors, you may restart the unit for limited operation with 4 beeps when operation starts.

INFORMATION

FOR SEASONAL INSPECTION AFTER EXTENDED NON-USE

- · Check remote control batteries.
- · No obstruction at air inlet and air outlet vents.
- Use Auto OFF/ON button to select Cooling operation. After 15 minutes of operation, it is normal to have the following temperature difference between air inlet and air outlet vents: Cooling: ≥ 14.4°F

FOR EXTENDED NON-USE

- Switch off power at the circuit breaker.
- · Remove the remote control batteries.

NON SERVICEABLE CRITERIAS

SWITCH OFF POWER AT THE CIRCUIT BREAKER then please consult an authorized dealer under the following conditions:

- · Abnormal noise during operation.
- Water/foreign particles have entered the remote control.
- · Water leaks from Indoor unit.
- · Circuit breaker switches off frequently.
- · Switches or buttons are not functioning properly.

Information for Users on Collection and Disposal of Old Equipment and used Batteries



[Information on Disposal in other Countries outside the European Union]

These symbols are only valid in the European Union. If you wish to discard these items, please contact your local authorities or dealer and ask for the correct method of disposal.



Note for the battery symbol (bottom two symbol examples):



This symbol might be used in combination with a chemical symbol. In this case it complies with the requirement set by the Directive for the chemical involved.

Contact your local hazardous waste disposal hotline.

Models Number

CS-S9NKUA / CU-S9NKUA CS-S12NKUA / CU-S12NKUA



The above listed models have been designed and manufactured to meet ENERGY STAR® criteria for energy efficiency when matched with appropriate coil components. However, proper refrigerant charge and proper air flow are critical to achieve rated capacity and efficiency. Installation of this product should follow the manufacturer's refrigerant charging and airflow instructions. Failure to confirm proper charge and airflow may reduce energy efficiency and shorten equipment life.

Federal Communications Commission Interference Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- · Increase the separation between the equipment and the receiver.
- · Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- · Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: To assure continued compliance, follow the attached installation instructions. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Industry Canada Notice

This Class B digital apparatus complies with Canadian ICES-003.

MEMO
· · · · · · · · · · · · · · · · · · ·
·
· · · · · · · · · · · · · · · · · · ·




MEMO
· · · · · · · · · · · · · · · · · · ·
·
· · · · · · · · · · · · · · · · · · ·

QUICK GUIDE

Remote Control Preparation

	1	
	2	1 Pull out
3	0000	2 Insert AAA or R03 batteries (can be used ~ 1 year)
(4 5 6	3 Close the cover
		4 Press CLOCK
		5 Set time
		6 Confirm
9	SET CHECK CLOCK RESET	

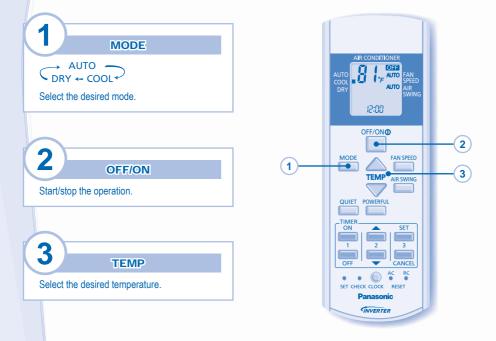

Panasonic Corporation Website: http://panasonic.net/

Website: http://panasonic.net/ For inquiries, please call 1-800-851-1235

