


# PFWS4600L/PFWS4605L

## GE Profile 5.1 IEC\* cu. ft. stainless steel capacity frontload washer with Steam

### Dimensions and Installation Information (in inches)

Electric Rating	
120V	12.0A, 60Hz

**Installation Information:** For complete information, see installation instructions packed with your washer.

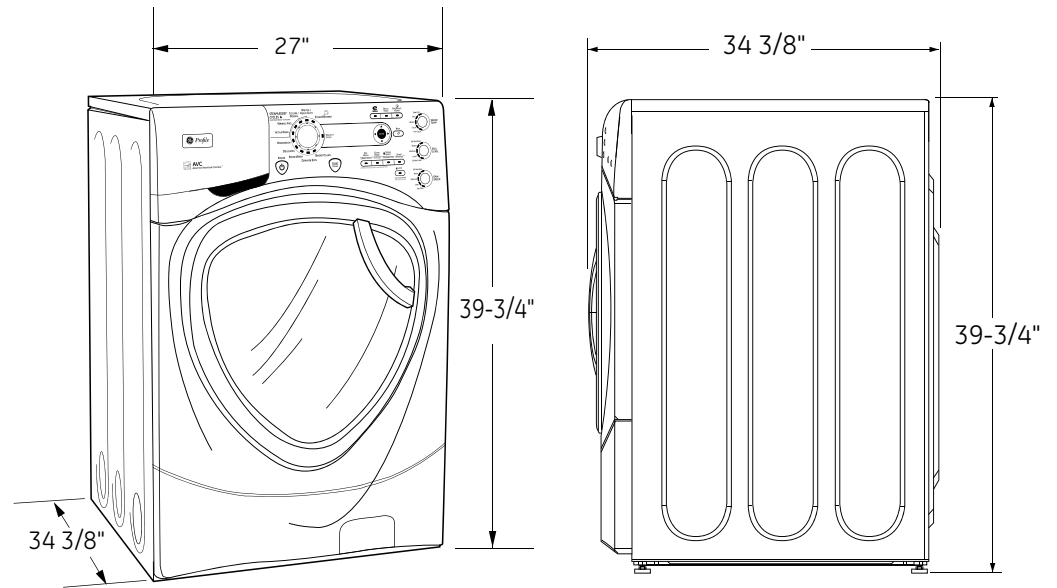

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at [ge.com](http://ge.com) or call GE Answer Center® service, 800.626.2000.



imagination at work



Listed by  
Underwriters  
Laboratories

# PFWS4600L/PFWS4605L

## GE Profile 5.1 IEC\* cu. ft. stainless steel capacity frontload washer with Steam

### Special Installation Requirements:

#### Stacked Installation:

Kit for stacking dryer over washer is not included with the washer.  
Order GEFLSTACK.

#### Alcove or Closet Installation:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outside.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" either side, 3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

#### Bathroom or Bedroom Installation:

- The dryer MUST be exhausted to the outdoors.
- The installation must conform with the local codes, or in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.

#### Minimum Clearance other than Alcove or Closet Installations:


- Minimum clearances to combustible surfaces 0" both sides, 3" rear.

**For more information on venting kits and accessories, please call 1-800-GE-CARES.**

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at [ge.com](http://ge.com) or call GE Answer Center® service, 800.626.2000.




### Stacked Dimensions (in inches)

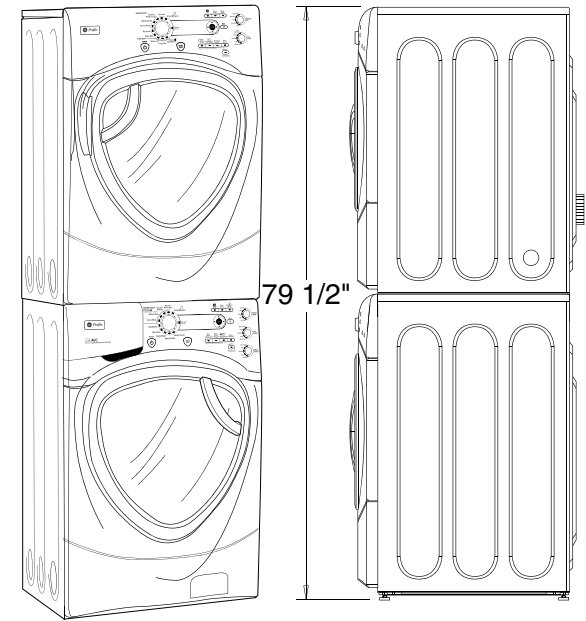

### SmartDispense™ Pedestal Dimensions (in inches)

SPBD880JMG - Champagne  
SPBD880JWW - White




This optional 15" pedestal raises the door opening and height of the washer or dryer. Feet on 15" pedestal allow it to adjust to 15-3/8" height.

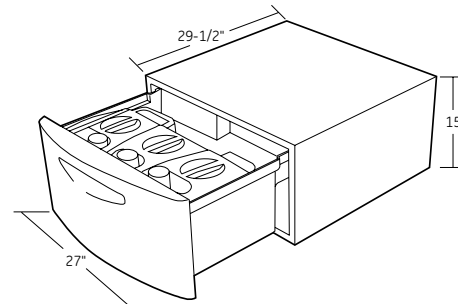

### Storage Pedestal Dimensions (in inches)

SPSD157JMG - Champagne  
SPSD157JWW - White

This optional 15" pedestal raises the door opening and height of the washer or dryer. Feet on 15" pedestal allow it to adjust to 15-3/8" height.

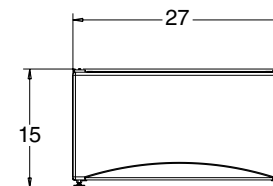


# PFWS4600L/PFWS4605L

## GE Profile 5.1 IEC\* cu. ft. stainless steel capacity frontload washer with Steam

### Features and Benefits

- Steam Refresh/Steam Assist - Steam Refresh helps reduce wrinkles and odors and rejuvenates fabrics, while Steam Assist penetrates fabrics to dissolve soils and help remove tough stains
- ENERGY STAR® qualified and CEE Tier III rated - Meets or exceeds federal guidelines for energy efficiency for year-round energy and money savings
- Adaptive Vibration Control (AVC) - Laundry room on the second floor? No problem! AVC adapts and optimizes spin patterns reducing vibration and sound no matter where your laundry room is located
- Overnight Ready - A small load is washed and ready to wear in 8 hours or less without changing the load from the washer to the dryer
- Specialty cycles - Pre-set cycles take specific care of 24 types of specialty loads including performance fabrics, fleece, pet bedding, and bras and hosiery
- eWash option - Energy-saving option uses a cold water wash on select cycles without sacrificing performance
- SmartDispense™ technology - Pedestal holds up to six months of detergent and fabric softener\* and dispenses the right amount at the right time
- Stain Inspector™ system - The most comprehensive stain removal system available treats over 40 common stains, from grass stains to grease
- 1300 RPM spin speed - Fast spin speeds remove water efficiently and minimize dry time
- ADA Compliant
- Model PFWS4605LMG – Champagne
- Model PFWS4600LWW – White

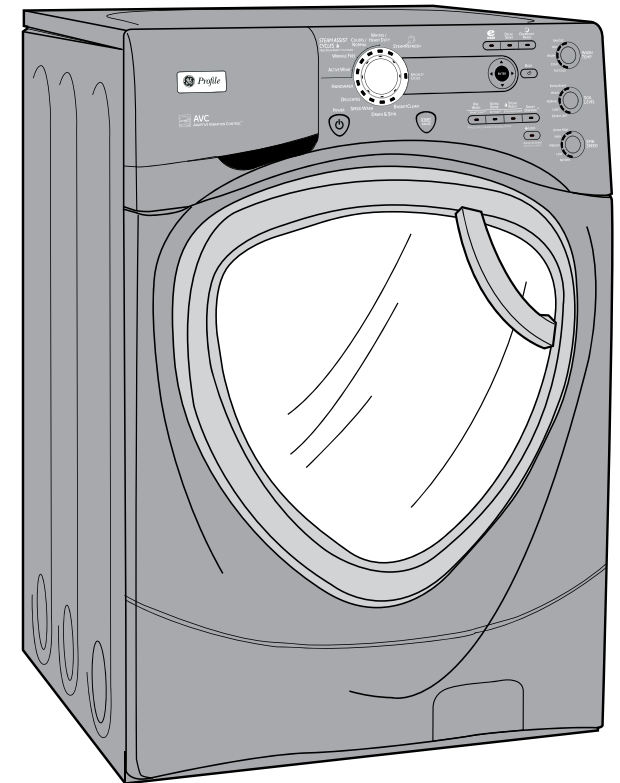

Modified Energy Factor (MEF)	2.69
Water Factor (WF)	3.9



imagination at work

