



LAUNDRY SOLUTIONS
YOU CAN **DEPEND** ON.

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ SOFT-MOUNT, HIGH-SPEED EXTRACTOR

NEW CHEMICAL INJECTION SYSTEM

Designed to make chemical installation faster, simpler and more precise, the new Maytag® Commercial Laundry Chemical Injection System features easy-access connections on the outside of the machine. This eliminates the need for having to open up the washer on routine visits. The new system also provides chemical supply companies and the machine's users with clear visibility on how detergent, bleach, softener and other chemicals are being dispersed.



MICROPROCESSOR CONTROLS

Maytag® microprocessor controls offer 15 preprogrammed cycles, plus the capability to create multiple unique cycles. Also, one-touch cycle selection and multilingual readouts make these controls easy for everyone to operate.

BIG-LOAD PERFORMANCE, FLEXIBLE INSTALLATION

Maytag® soft-mount, high-speed extractors feature a suspension system that allows for more flexibility and does not require special foundations for installations.

FOR YOUR OPERATION:

- Inverter Drive Technology For Longer Life
- Up to 365 G's In Final Spin*, Reducing Dry Time
- Easy-To-Operate Microprocessor Controls
- Adjustable Water Temperatures And Levels
- Manual 5-Bay Detergent And Softener Dispenser
- Ability To Use Powdered Or Liquid Chemical Supply
- 8 Chemical Supply Signals
- Two Extra-Large Drain Valves On MFS80 For Faster Draining
- Extra-Large Door And Handle

BUILT-TO-LAST™ FEATURES:

- Heavy-Duty Latch And Door Handle
- Durable Sealed Bearings
- Rugged Frame And Cabinet
- Easy Service Access

* Model MFS80PNF only. Model MFS50PNF spins up to 310 G's.

MFS50/80PNF




SPINS
UP TO **350G's**
TO EXTRACT MORE WATER


Model MFS80PNF shown.

Maytag® Energy Advantage™ Soft-Mount, High-Speed Extractor


MICROPROCESSOR CONTROL



FRONT VIEW



SIDE VIEW

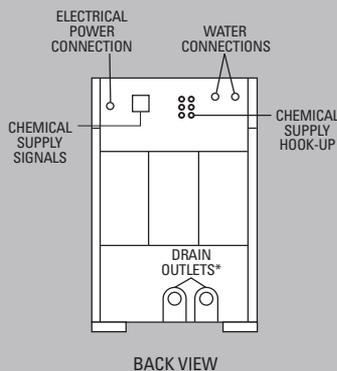

BACK VIEW

*Single Outlet: MFS50PNF

MAYTAG® LIMITED WARRANTY

2 YEARS — ALL PARTS
5 YEARS — SHELL,
WELDED FRAME ASSEMBLY,
BASKET, SHAFT ASSEMBLY,
BEARINGS AND SEALS

For a period from the date of original purchase through the times listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.



	Energy Advantage™ Soft-Mount, High-Speed Extractor	
WASHER SPECIFICATIONS		
MODEL	MFS50PNF	MFS80PNF
MOTOR		
Inverter drive	•	•
Variable speed	•	•
HP (kw)	3 (2.2)	5.5 (4)
Voltage	208 – 240V Three-Phase	208 – 240V Three-Phase
BREAKER SIZE — amps	15	30
SPEED		
Wash speed — rpm	42	38
Extract speed — maximum rpm	860	830
Extract speed — maximum g-force	310	350
WATER INLET/HOSE		
Water inlet — in. (mm)	.75 (19)	1 (25.4)
Operating pressure — psi (mpa)	43 – 73 (0.3 – 0.5)	43 – 73 (0.3 – 0.5)
Drain size — in. (mm)	3.0 (76) O.D.	2x3.0 (76) O.D.
CAPACITY		
Lbs. (kg)	50 (22)	80 (33)
Cylinder volume — cu. ft. (liters)	7.8 (221)	11.8 (334)
Cylinder diameter — in. (mm)	29.5 (750)	36 (914)
Cylinder depth — in. (mm)	19.7 (498)	20 (510)
CABINET		
Stainless Steel	•	•
APPROXIMATE WEIGHT		
Crated — lbs. (kg)	1829 (830)	3020 (1370)
Uncrated — lbs. (kg)	1631 (740)	2712 (1230)
DIMENSIONS		
A) Height — in. (mm)	64.57 (1640)	75 (1905)
B) Width — in. (mm)	38.78 (985)	47.04 (1195)
C) Depth — in. (mm)	36.10 (917)	48.11 (1222)
D) Depth including door handle and air vent on back — in. (mm)	45.66 (1160)	52.4 (1330)
Door Opening — in. (mm)	16.1 (410)	21.3 (540)
See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.		

NEW YORK CITY
M.E.A.

