

Electrolux Ice Makers

25/32/45/75 KG - Hollow

The range of the Electrolux ice makers/flakers is designed to meet every size of catering outlet, with a range of 21 models producing from 21 up to 200 kg of cubes per 24 hours or 90 - 500 kg of ice flakes per 24 hours. A spray system produces solid, crystal clear ice cubes and flakes that are slow to melt and do not immediately dilute the drink.



730012

EASY TO INSTALL

- The compact dimensions of the ice makers make them highly suitable for any location, particularly those where space is at a premium.
- The paddle system technology grants optional performance even in case of hard water supply. Ice productivity is not affected by limestone.

EASY TO USE

- All models are available in air-cooled or water-cooled versions*.

- The ice-making technology (paddle system) guarantees compact, hygienically pure ice cubes.
- R404a refrigerant.

EASY TO MAINTAIN

- Reliability is guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.


EASY ON THE ENVIRONMENT

- All models comply with the standards required by the main international approval bodies and are H marked.

* Water consumption and productivity have been calculated using a water temperature of 15°C and an ambient temperature of 21°C.



Electrolux

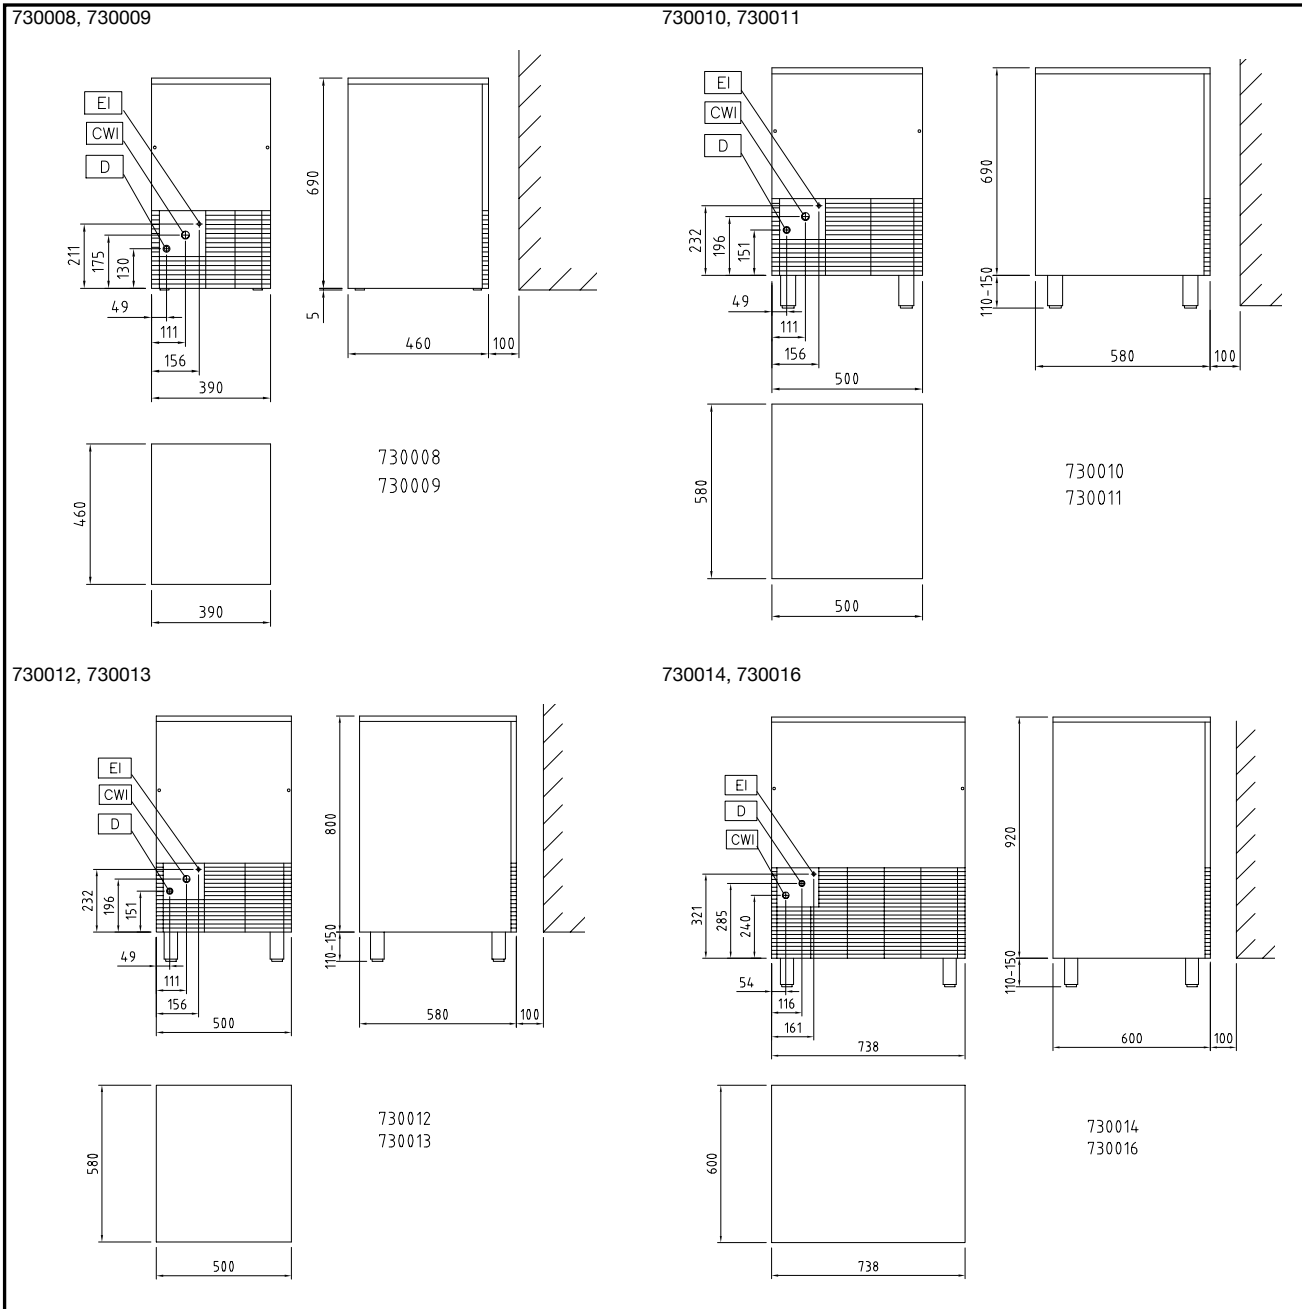

Electrolux Ice Makers

25/32/45/75 KG - Hollow

HEBA010

2009-10-06

	IMF28A 730008	IMF28W 730009	IMF35A 730010	IMF35W 730011	IMF58A 730012	IMF58W 730013	IMF80A 730014	IMF80W 730016
LEGEND								
CWI - Cold water inlet	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
D - Water drain	24mm	24mm	24mm	24mm	24mm	24mm	24mm	24mm
EI - Electrical connection	220/240 V, 1+N, 50	220/240 V, 1+N, 50	220/240 V, 1+N, 50	220/240 V, 1+N, 50	220/240 V, 1N, 50	220/240 V, 1+N, 50	220/240 V, 1+N, 50	220/240 V, 1+N, 50
TECHNICAL DATA								
Air cooled	●		●		●		●	
Water cooled		●		●		●		●
Output - kg/day	25	25	32	32	45	45	75	75
Bin capacity - Kg	8	8	15	15	20	20	30	30
External dimensions - mm								
width	390	390	500	500	500	500	738	738
depth	460	460	580	580	580	580	600	600
height	690	690	800	800	910	910	1030	1030
Refrigerant type	R404a;	R404a;	R404a;	R404a;	R404a;	R404a;	R404a;	R404a;
Power - kW								
installed-electric	0.31	0.31	0.31	0.31	0.42	0.42	0.48	0.48
Noise level - dBA	48.4	48.4	48.4	48.4	48.4	48.4	49.4	49.4
Net weight - kg.	38	38	47	47	54	54	75	75
Power supply - V, phases, Hz	220/240 V, 1+N, 50	220/240 V, 1+N, 50	220/240 V, 1+N, 50	220/240 V, 1+N, 50	220/240 V, 1N, 50	220/240 V, 1+N, 50	220/240 V, 1+N, 50	220/240 V, 1+N, 50

Subject to change without notice