

RANGE COMPOSITION

Zanussi Professional offers a range of ice-making machines specially designed to produce crushed ice. All models, whilst having a compact size, offer excellent performance and maximum efficiency. The range has been specifically designed for use in bars, restaurants, hotels and discos and can also be used in medical facilities.



730551

90/150 KG

ICE FLAKERS **ZANUSSI**
PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES



- ◆ All models are available in air-cooled or water-cooled versions*.
- ◆ The ice-making method (crushing system) guarantees compact, hygienically pure crushed ice that is resistant to melting.
- ◆ R404a refrigerant.

- ◆ Reliability is guaranteed by the quality of the construction materials used (external panelling completely in AISI 304 stainless steel) and the sophisticated product and process technology involved.
- ◆ The compact dimensions of the ice flakers make them highly suitable for any location, particularly those where space is at a premium.

- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

* Water consumption and productivity have been calculated using a water temperature of 15°C and an ambient temperature of 21°C.

CHARACTERISTICS	MODELS			
	FIM94A 730533	FIM94W 730534	FIM150A 730551	FIM150W 730552
Air cooled	●		●	
Water cooled		●		●
Output - kg/day	90	90	150	150
Bin capacity - Kg	20	20	40	40
External dimensions - mm				
width	500	500	738	738
depth	660	660	690	690
height	800	800	1030	1030
Refrigerant type	R404a	R404a	R404a	R404a
Power - kW				
installed-electric	0.55	0.55	0.65	0.65
Noise level - dBA	54.3	54.3	54.3	54.3
Net weight - kg.	59	59	85	85
Power supply - V, phases, Hz	220/240 V, 1N, 50	220/240 V, 1N, 50	220/240 V, 1N, 50	220/240 V, 1N, 50

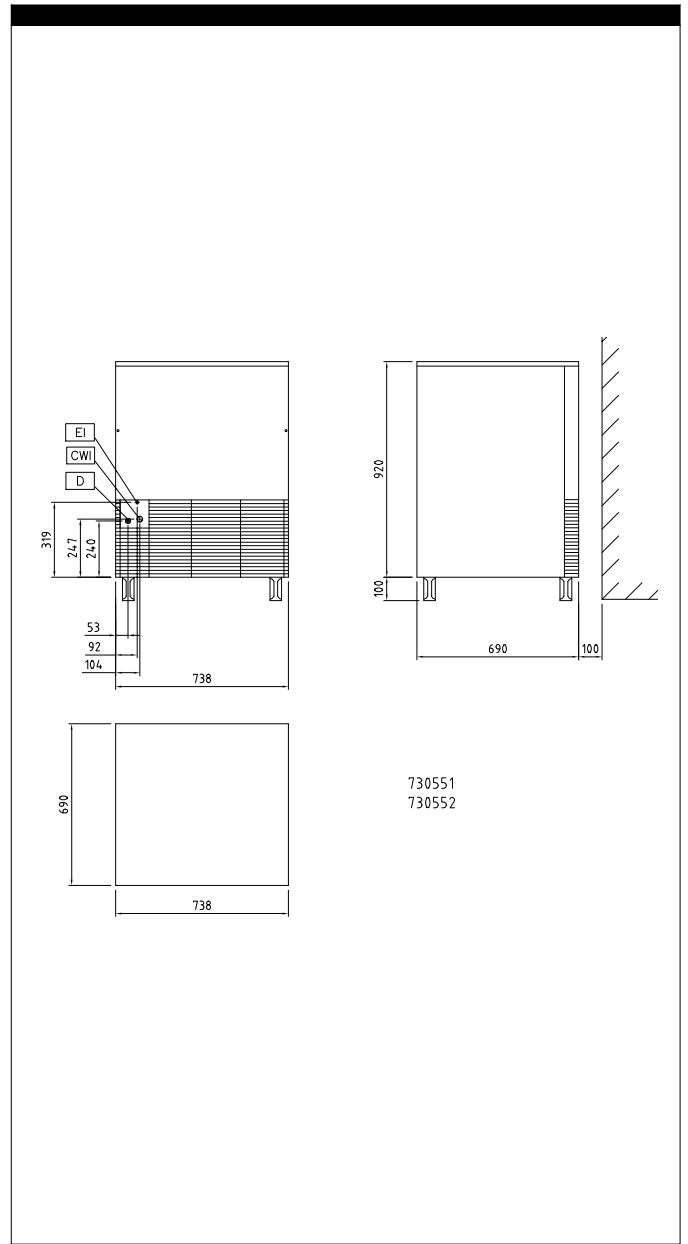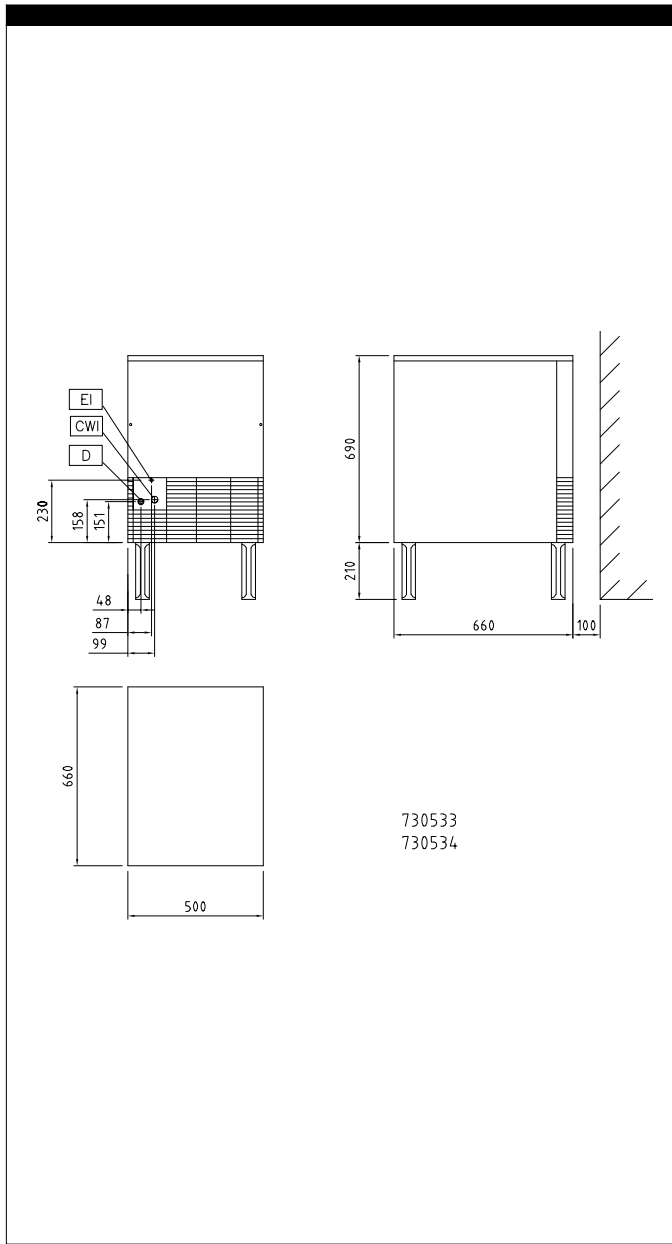

	FIM94A 730533	FIM94W 730534	FIM150A 730551	FIM150W 730552
CWI - Cold water inlet	3/4"	3/4"	3/4"	3/4"
D - Water drain	24mm	24mm	24mm	24mm
EI - Electrical connection	220/240 V, 1N, 50	220/240 V, 1N, 50	220/240 V, 1N, 50	220/240 V, 1N, 50



www.zanussiprofessional.com