



CATEYE VELO5 CATEYE VELO8

CYCLOCOMPUTER Model CC-VL510/CC-VL810

ENG



U.S. Pat. Nos. 4642606, 5236759 and Pat. Pending
Copyright©2007 CATEYE Co., Ltd.
CCVL51/81-070105 066600560 3

Before using the computer, please thoroughly read this manual and keep it for future reference.

Caution

- Do not concentrate on the computer operations while riding. Always be sure to ride safely.
- Be sure to securely mount the magnet, sensor and bracket on your bicycle, and periodically check to see if any parts have loosened.
- Used batteries are harmful if swallowed by mistake. They must be disposed in accordance with local regulations.
- Do not leave the main unit exposed to direct sunlight. Never disassemble the main unit.
- For cleaning of the main unit or accessories, use diluted neutral detergent on a soft cloth, and then wipe it off with a dry cloth. Do not use paint thinner, benzene or alcohol since such chemicals may damage the surface.

Package Contents

- 1 Bracket
- 2 Wire
- 3 Sensor
- 4 Magnet
- 5 Nylon Ties (x 7)

IMPORTANT!

Correct positions of the sensor and the magnet:

- A** When rotating the front wheel, the magnet's 4 center must be aligned with the sensor's 3 marking line.
- B** The distance between the sensor 3 and the magnet 4 must be less than 5 mm.

Name of Parts

- A** Speed 0.0 (4.0) to 299.9 km/h [0.0 (3.0) to 185.0 mph]
- B** Mode Symbol Indicates the mode currently selected.
(The corresponding value is indicated on the lower line.)
- C** Pace Arrow* Indicates if the current speed is faster or slower than the average speed. (▲ Faster ▼ Slower)

- 1 Speed Scale
- 2 Sub Display (selected function)
- 3 Battery Case Cover
- 4 Contact

*The Pace Arrow feature is only available on the VELO8. Pace Arrows are not displayed on the VELO5.

Display function

- Tm*** [Elapsed Time] 0:00'00" to 9:59'59"
- Dst** [Trip Distance] 0.00 to 999.99 km [mile]
- Av*** [Average Speed] 0.0 to 299.9 km/h [0.0 to 185.0 mph]
(Measurable up to 27 hrs or 999.99 km/h)
- Mx** [Maximum Speed] 0.0 (4.0) to 299.9 km/h [0.0(3.0) to 185.0 mph]
- Cal*** [Calorie Consumption] 0.0 to 9999.9 kcal (estimated from speed data)
- Odo** [Total Distance] 0.0 to 9999.9 km [mile]
- Ck** [Clock] 0:00' to 23:59' [1:00' to 12:59']

* This feature is only available on the VELO8. No measurement is done on the VELO5.

Start/Stop of Measuring

The unit starts measuring automatically when you start pedaling, and stops measuring when you come to a stop.
The upper display always shows the Current Speed.

Shift of Lower Display

Each time you press the MODE button, a different data value appears on the lower line. **e**

Power Saving Function

If the main unit does not receive a signal after about 10 minutes, the main unit enters Power Saving Mode and displays the clock count only. To re turn to normal display, press the MODE button or start your bicycle again to cancel the Power Saving function.

Data Reset

When a screen with the **Reset** mark in the OPERATION FLOW is displayed, continue pressing the MODE button and the measured data will return to zero. However, the Odometer (total distance) and Clock do not return to zero.

How to Set Clock

In the clock mode, press SET button on the back, and the display enters clock setting mode.
* If Km/h has been selected for speed scale, it becomes 24-hour clock.
* If mph has been selected, it becomes 12-hour clock. **f**

How to Change Tire Size

Display the Total Distance (Odo) and press the SET button to change the tire size. You can select a tire size in two ways: Either select from among preset sizes **g** or enter the tire's circumference directly in increments of 1 cm. **d**

Maintenance

- If the contact of the unit or the bracket gets wet, dry it off with a cloth. If they become rusty, it will cause speed detection error.
- If the gaps between the buttons and the unit get clogged with mud or sand, wash them away with water.

Troubleshooting

No display.

Has the battery in the main unit run down?
Replace it with a new one.

The main unit may still have a charge.

Put the battery in backwards to short the unit then install properly and do all clear operation.

Incorrect data appears.

Do all clear operation.

Current speed does not appear. (First, short-circuit the contact of the main unit a few times with a piece of metal. If current speed appears, the main unit is working fine and the cause should be attributed to the bracket or the sensor.)

Is the clearance between the sensor and the magnet too large?
Are the magnet's center and the sensor's marking line aligned?
Re-adjust the positions of the magnet and the sensor. (The clearance should be less than 5 mm.)

Is the cord broken?
Even if the outside of the cord looks normal, there could be damage.
Replace the bracket and sensor set with a new one.

Is there anything sticking on the contact of the main unit or the bracket?
Clean the contact with a cloth.

Current speed disappears when using in the rain.

Wipe any water or dirt from the contacts and apply a water repellent silicon grease. Do not apply standard grease, as it may cause damage to the bracket.

Replacing Battery








If the screen becomes dim, it is the time to replace the battery. **g**

* Insert a new lithium battery (CR2032) with the (+) mark facing up.

After replacing the battery, perform the all-clear operation. Follow SETTING to select the measurement unit & tire size and set the clock display to the current time.

Specification

- Battery ----- Lithium Battery CR2032 x 1 (battery life: approx. 3 years)
(*The life of the factory-loaded battery might be shorter than this.)
 - Microcomputer ----- 4-bit 1-chip (Crystal controlled oscillator)
 - Display ----- Liquid crystal display
 - Sensor ----- No-contact magnetic sensor
 - Tire Sizes ----- Tire sizes of 16, 18, 20, 22, 24, 26, 700C, and 27 inches, or tire peripheral lengths from 100 to 299 cm (Initial value: 26 in.)
 - Working Temperature ----- 0 °C - 40 °C
 - Length of Wire ----- 70 cm
 - Dimension/Weight ----- 2-1/16" x 1-1/2" x 45/64" (52.5 x 38 x 18 mm) / 0.95 oz (27 g)
- * The specifications and design are subject to change without notice.

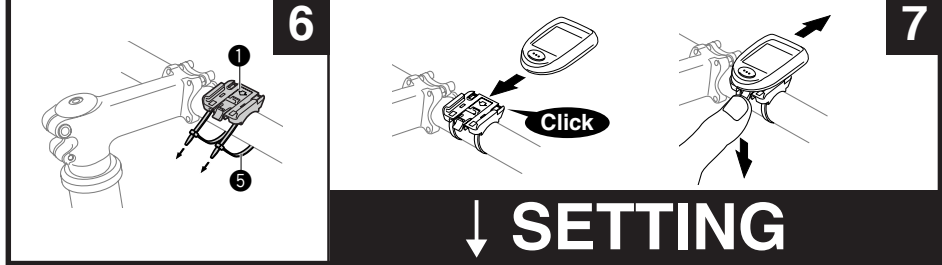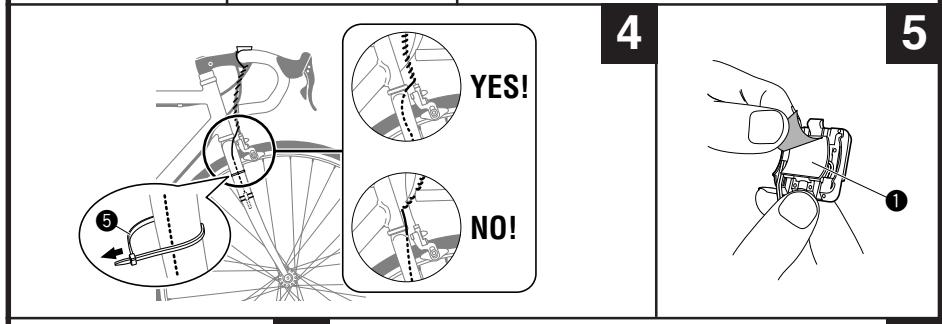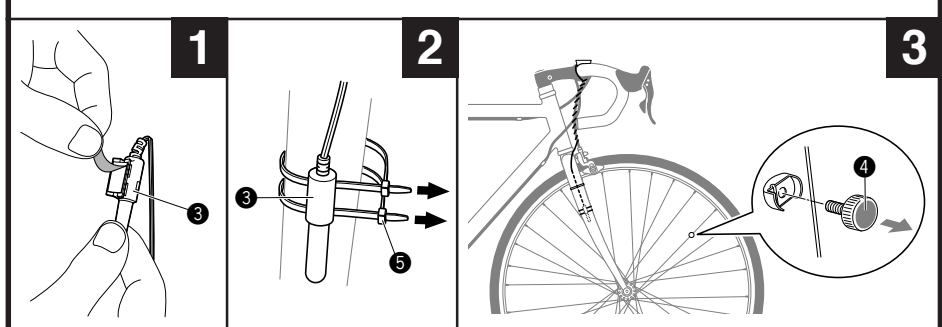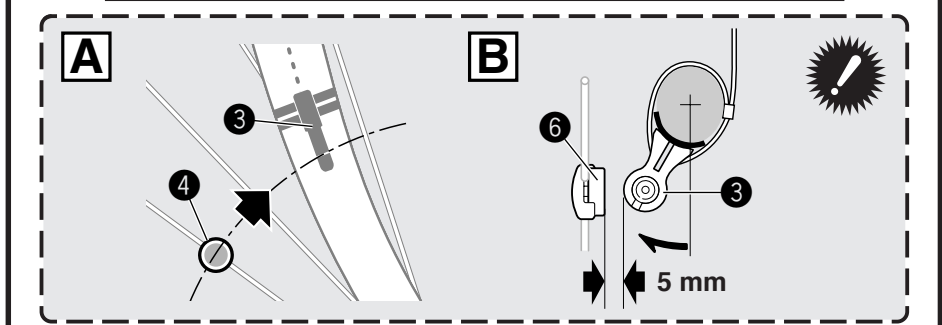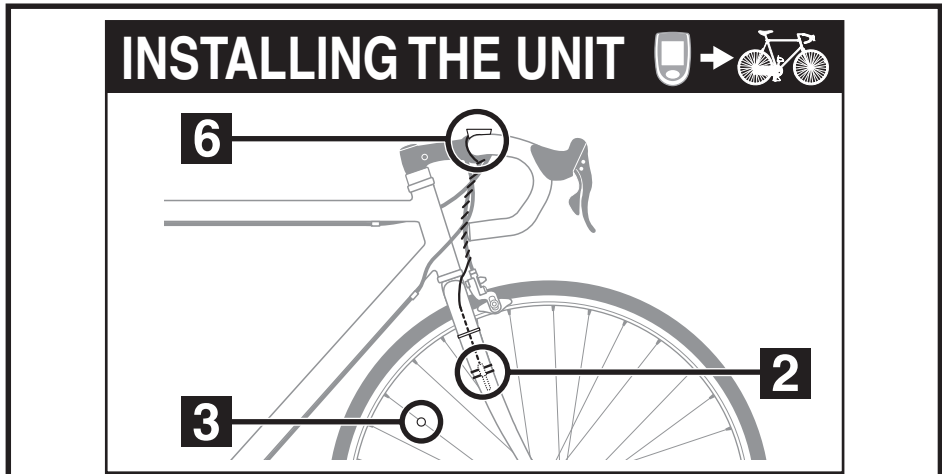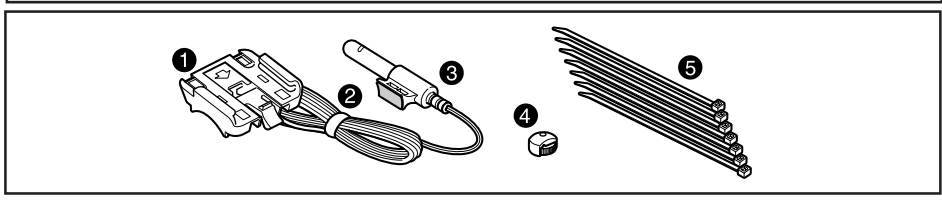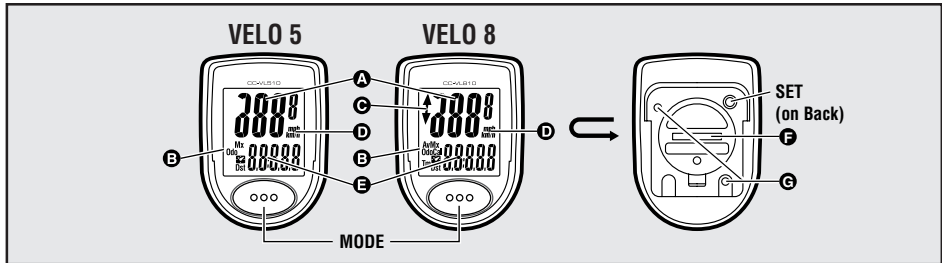

↓ SETTING


Calorie Consumption*1 (VELO8)

The calorie consumption data is only the accumulated value that is calculated from the speed data of every second. It differs from the actual consumed calorie.

km/h			
Speed	10 km/h	20 km/h	30 km/h
Kcal per hour	67.3 kcal	244.5 kcal	641.6 kcal
mph			
Speed	10 mph	20 mph	30 mph
Kcal per hour	155.2 kcal	768.2 kcal	2297.2 kcal

#169-9550

Bracket Sensor Kit



#166-5150

Lithium Battery (CR2032)




#169-9691N

Standard Magnet



#169-9560

Heavy Duty Wire and Bracket Sensor Kit



#169-9302 [#169-9307]

Center Mount Bracket Kit [Long]




#169-9303

Bracket Sensor Kit for Aero Bar



#169-9304

Stem Mount Bracket Kit



#169-9760

Magnet for Composit Wheel



LIMITED WARRANTY

2-Year Warranty for Main Unit Only (Accessories/Bracket sensor and Battery Consumption excluded)

CatEye cycle Main units are warranted to be free of defects from materials and workmanship for a period of two years from original purchase. If the product fails to work due to normal use, CatEye will repair or replace the defect at no charge. Service must be performed by CatEye or an authorized retailer.

To return the product, pack it carefully and enclose the warranty certificate (proof or purchase) with instruction for repair. Please write or type your name and address clearly on the warranty certificate.

Insurance, handling and transportation charges to CatEye shall be borne by person desiring service.

For UK and REPUBLIC OF IRELAND consumers, please return to the place of purchase. This does not affect your statutory rights.

(Address for service) **CATEYE CO., LTD.**

2-8-25, Kuwazu, Higashi Sumiyoshi-ku, Osaka 546-0041 Japan
Attn.: CATEYE Customer Service Section

Service & Research Address for United States Consumers:

CATEYE Service & Research Center
1705 14th St. 115 Boulder, CO 80302
Phone : 303.443.4595
Toll Free : 800.5CATEYE
Fax : 303.473.0006
E-mail : service@cateye.com
URL : http://cateye.com

SETTING

All Clear

SET + MODE

2 buttons SET MODE

PUSH!

Tm →
Dst →
Av →
Mx →
Cal →
Odo →
Clock →

Select km/h or mph

Select km/h

km/h ← → mph

SETTING END

Wheel Size

Tire size	L (mm)
ET170	
2 x 1.75	935
14 x 1.50	102
14 x 1.75	106
16 x 1.50	119
16 x 1.75	123
18 x 1.50	134
18 x 1.75	135
20 x 1.75	152
20 x 1-3/8	162
22 x 1-3/8	177
22 x 1-1/2	179
24 x 1	175
24 x 3/4 Tubular	179
24 x 1-1/8	180
24 x 1-1/4	191
24 x 1.75	189
24 x 2.00	193
24 x 2.125	197
26 x 7/8	192
26 x 1.00	191
26 x 1.05	195
26 x 1.25	195
26 x 1-1/8	197
26 x 1-3/8	207
26 x 1-1/2	210
26 x 1.40	201
26 x 1.50	201
26 x 1.75	202
26 x 1.95	205
26 x 2.00	205
26 x 2.10	207
26 x 2.125	207
26 x 2.25	208
26 x 3.00	217
27 x 1	215
27 x 1-1/8	216
27 x 1-1/4	216
27 x 1-3/8	217
50 x 23C	194
50 x 23C	194
50 x 23C	194
50 x 35A	209
50 x 38A	218
50 x 38B	211
700 x 18C	207
700 x 18C	208
700 x 20C	209
700 x 23C	210
700 x 25C	211
700 x 28C	214
700 x 30C	215
700 x 32C	216
700C Tubular	213
700 x 35C	217
700 x 38C	216
700 x 40C	220
29 x 2.1	229
29 x 2.3	233


Quick Setting Size

27"

Detailed Setting Size

L = 216 (cm)

OPERATION FLOW

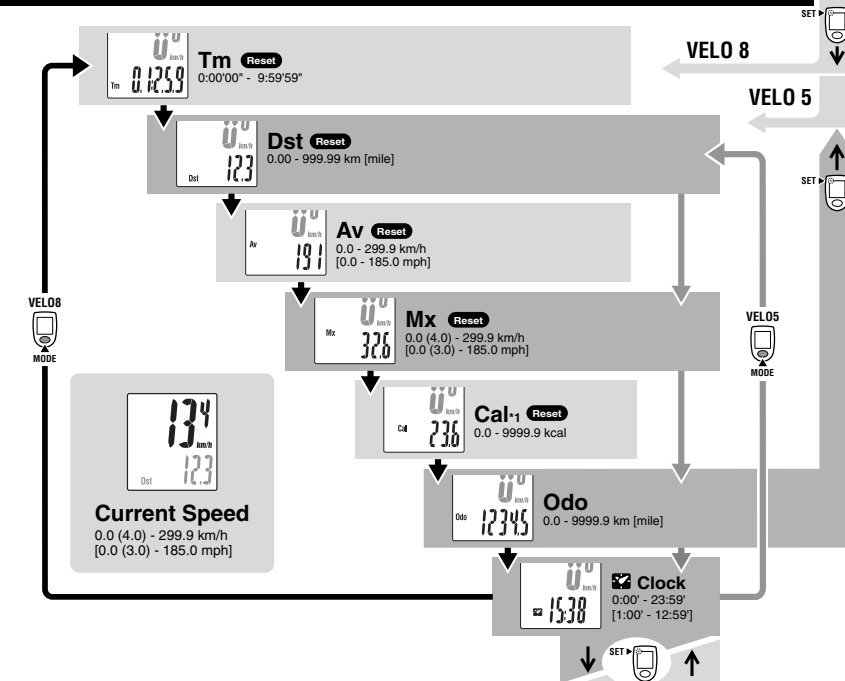

Data Reset

Reset

MODE (2 sec.)

Tm →
Dst →
Av →
Mx →
Cal →

BATTERY

Close

Open

CR2032

All Clear

Clock Setting

Setting Time

3:10

Setting Time (00-59)

SETTING END