




GETS THE JOB DONE FAST!

9" Capacity Chippers!



Four reversible chipper blades mounted on a dynamically balanced disc weigh in at 275 lbs. [125kg] Maintenance and service is quick and easy with a hinged disc cover.

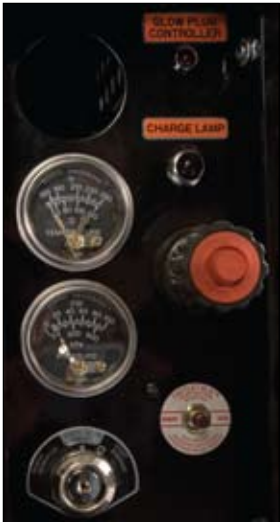

A full set of gauges enables the operator to monitor primary functions at all times. Both models are electric start (battery included).



Model CH922DH (74950)

Model	Engine	Size (LxWxH)	Chipper Feed Capacity	Feed System	Weight	Wheel Opening	Wheel (Lbs.)	Tires Base
CH911DH (72928)	Kubota 1.1 Liter Diesel	119"x79"x89"	9"	hydraulic	2480	9"x9"	68"	P215 75R15
CH922DH (74950)	Kubota 2.2 Liter Diesel	119"x79"x89"	9"	hydraulic	2700	9"x9"	68"	P215 75R15

Option:
71677 2" Ball Coupler For Pintle Hitch



Find a dealer near you!

Call us at 800.247.7335 or
Log onto www.BearCatProducts.com

P.O. Box 849, West Fargo, ND 58078
Email: sales@BearCatProducts.com
Fax: 701.282.9522



9" Chipper Specs

Models CH911DH (72928), CH922DH (74950)

76cm [30"] DIAMETER DISC

1.25" [76cm] diameter by 1.25" [3.2cm] thick rotor disc that weighs 275 lbs. [125kg]. Machined to balance. Disc turns at 1500 RPM. .75" [4.45cm] diameter rotor shaft.

ENGINES

Kubota engine 1.1 Liter Diesel, 69 cu. In. [1.1 L] Max torque: 73.5 N.m [7.5 kgf.m] at 2,200 rpm, runs at 3,000 rpm. Warranty 2 yrs. 2000 hrs on everything, 3 yrs., 3000 hrs major components coverage. Kubota engine 2.2 Liter Diesel, 134 cu. In. [2.2L] Max torque: 147 N.m [15 kgf.m] at 1,800 rpm, runs at 2,800 rpm. Warranty 2 yrs. 2000 hrs. on everything, 3 yrs., 3000 hrs. major components coverage.

FUEL CAPACITY

18 gallons [68 liters]. Fuel consumption on the 1.1 Liter Kubota is 1.7 gal [7.57 liters] Per hour at full load. Fuel consumption on the 2.2 Liter Kubota is 3 gal. [14.2 liter] per hour at full load.

HYDRAULIC FEED SYSTEM

White 45 cu. in. [737cc] hyd motor, 10-micron spin on filter. Self-contained system with infinite speed settings, dedicated neutral and full reverse, pump output. 25 liters/min [6.6 gal per min.] and 4HP with maximum pressure and maximum flow. Feed system operates under [1750 PSI [119atm], 3 gal. [11.4 liter] tank capacity. Single 15" [38cm] diameter top feed roller. Feed rate is 0 - 150 FPM [0-45 meters/min.].

MANUAL BELT ENGAGEMENT LEVER

FEED SYSTEM

15" [38 cm] diameter feed roller containing 10 knife blades, four reversible chipping blades, adjustable Feed chute is 30.25" X 30.75" [77x77cm] tray 27" [68cm] off the ground. Feed table is 38" [96.5cm] long. Infeed hopper opening is 9"x9" [23cm x 23cm]. Drop-down feed tray with locking safety pin.

EASY ACCESS

The rotor is accessible through the hinged disc cover, which exposes one half of the disc for easy access to the chipping blades and for easy clean out.

HEAVY-DUTY CONSTRUCTION

9"x9" [.95cm] thick steel face plate on the disc housing; .25" [6.35mm] thick steel on the wrap around with welded construction.

INTEGRATED BLOWER

Put the chips where you want them with the dedicated blower. 360° rotatable, 8" [20cm] diameter steel tubing with adjustable spout cap allows you to put the chips where you want them the first time.

ADJUSTABLE JACK

Roller wheel with 850 lb. [385kg.] Rating. Adjustable jack allows one person to easily maneuver the chipper around and hook up to a vehicle.

TRIPLE-BANDED BELT DRIVE FOR BETTER TRANSFER OF POWER

HIGHWAY TOWABLE

68" [172cm] tread width (center to center) and P215 75R15 tires with 3000 lb. [1360kg] torsion axle suspension enables the chipper to be easily towed down the highway. Light kit with license plate holder. Tow chains standard.

TELESCOPING TONGUE

Adjustable length and height. The length may be adjusted up to 45 cm [18"] with 4 pin settings on the pintle hitch. 5cm [2"] coupler hitch available as an accessory.

DIMENSIONS:

- Length 119" [302cm].
- Width 79" [200cm]
- Height 226cm [89"]

WEIGHT:

- Model CH911DH (72928) - 2480 lbs [1125kg]
- Model CH922DH (74950) 2700 lbs [1225kg.]

SAFETY:

- Safety chains standard
- Meets all applicable ISO and CE safety standards.



Find a dealer near you!

Call us at 800.247.7335 or

Log onto www.BearCatProducts.com

P.O. Box 849, West Fargo, ND 58078

Email: sales@BearCatProducts.com

Fax: 701.282.9522