




PERFECT SIZE FOR ALL APPLICATIONS

4" PTO & Towable Chippers!



Shown here is the model CH4540, 4" PTO CHIPPER. 540 rpm, Self-Feed

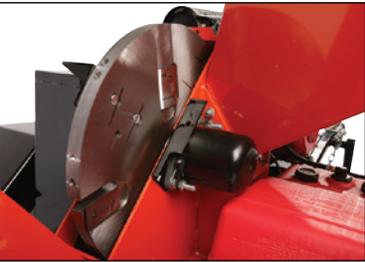

Heavy duty rotor disc that features two reversible heat treated steel chipper blades



Convenient foot pedal releases tension from the belts acting as a starting aid.



Model CH4614 (73420)

Model	Engine	Size (LxWxH)	Chipper Capacity	Feed Opening Size	Start	Weight (Lbs.)	3 Point Hitch	Tires/Wheels
CH4614 (73420)	HONDA OHV	73" x 52" x 87"	4"	5.5" x 7"	Electric	820		5.3"x12" pneumatic
CH4540 (73454)	PTO Cat. 1 540 rpm	48" x 45" x 87"	4"	5.5" x 7"	N/A	600	Cat. 1	N/A

Accessory:
70454 LIGHT KIT FOR TOWING *AVAILABLE FOR ONLY CH4614



Find a dealer near you!

Call us at 800.247.7335 or
 Log onto www.BearCatProducts.com

P.O. Box 849, West Fargo, ND 58078
 Email: sales@BearCatProducts.com
 Fax: 701.282.9522



4" Chipper Specs

1. 20" [51CM] DIAMETER DISC

- 20" [51cm] x 1.25" [3.175cm] thick rotor disc weighs 140 lbs. [63.5kg], machine balanced.

2. HONDA ENGINE OVERHEAD VALVE

- 614cc Honda OHV Engine with electric start (battery not included)

3. PTO DRIVEN MODEL # CH4540 (73454)

- Is a PTO drive, category one 3-point that weighs 600 lbs. [272kg].

4. DOUBLE BANDED BELT DRIVE

5. FOUR CHIPPING BLADES

- Both have the same reversible chipper blades, heat treated chipper steel with chrome content. 3.125" x .25"

6. ADJUSTABLE, 4-WAY ANVIL

- To ensure good quality chipping ability.
- Chipping blade edge angle is 45 degrees for pulling logs and limbs into the chipper.

7. EASY ACCESS

- The disc is accessible through the hinged disc cover by removing one bolt, which exposes one-half of the disc for easy access to the chipping blades and for easy inspection and maintenance.

8. 360° ROTATING DISCHARGE CHUTE WITH DEFLECTOR CAP

- Put the chips where you want them the first time.

9. HEAVY-DUTY CONSTRUCTION

- Heavy .25" [6.35mm] steel throughout, seam welded.

10. LARGE FEED HOPPER

- Feed your prunings or limbs into a 27" x 28" [68.6cm x 71.1cm] opening.

11. CHIPPER CHUTE

- Opening is 5.5" x 7" [14cm x 17.8cm] (for side limbs).

12. ADJUSTABLE JACK STAND (73413 & CH4614 (73420) TOWABLE MODELS)

- Allows one person to easily maneuver the chipper and hook up to a vehicle.

13. TORSION AXLE SUSPENSION (CH4614 (73420) TOWABLE MODEL)

- A towable torflex suspension axle with 5.30 x 12 [13.5cm x 30.5cm] tires.

14. WEIGHT

- 614cc Honda chipper weighs 820 lbs. [372kg]
- PTO chipper weighs 600 lbs. [272kg]

15. 2" [5.08CM] BALL COUPLER

16. SAFETY

- Meets all applicable ANSI safety standards.

17. PARTS

- Single-Edge Chipper Blade Kit (#70453)
- Double-Edge Chipper Blade Kit (#72493)



Find a dealer near you!

Call us at 800.247.7335 or
Log onto www.BearCatProducts.com

P.O. Box 849, West Fargo, ND 58078
Email: sales@BearCatProducts.com
Fax: 701.282.9522