

LOG PLACEMENT INSTRUCTIONS FOR SHADOWDANCE™ SERIES GAS LOGS SETS



GENERAL INFORMATION


This log placement instructions addendum has been prepared to assist in the placement of new or replacement log sets. The information provided here is to be used in conjunction with the Installation and Operation manual. Please read the Care and Operation Instructions completely before completing the procedures detailed in this placement guide. If you encounter any problems, need clarification of these instructions or are not qualified to properly install this log set, contact you local distributor or dealer.

Read this instruction sheet in its entirety before beginning the installation.

RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE READ IMPORTANT WARNINGS BEFORE PROCEEDING.

▲ WARNINGS


- Do not attempt to install the logs until the appliance installation has been completed, the gas line connected and tested for leaks and the initial burner operation has been checked out.
- If logs are not installed according to the log installation instructions, flame impingement and improper combustion could occur and result in soot and/or excessive production of carbon monoxide (CO), a colorless, odorless, toxic gas.
- The size and position of the log set was engineered to give the appliance a safe, reliable and attractive flame pattern. Any attempt to use a different log set with the Shadowdance series gas train models, LSVFSD-NG OR LSVFSD-LP will void the warranty and will result in incomplete combustion, sooting, and poor flame quality.
- Do not add extra logs or ornaments such as pine cones, vermiculite or rock wool. Using these added items can cause sooting.
- Do not place any lava rock on logs or burners.
 This may cause sooting. Only place lava rock on floor of fireplace.
- All warnings and precautions in the installation and operation manual provided with the appliance apply to these instructions.

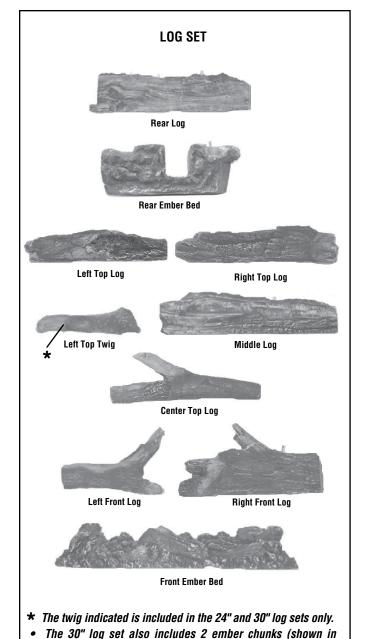


Fiaure 9).

LOG PLACEMENT INSTRUCTIONS

1. Place rear ember bed as shown in Figure 1.

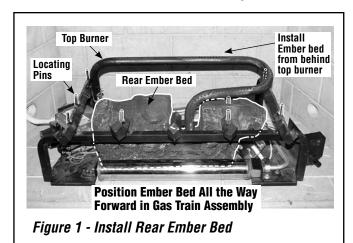

2. Place rear log onto the two rear grate locating pins as shown in *Figure 2* (the locating pins are outlined in *Figure 1*).

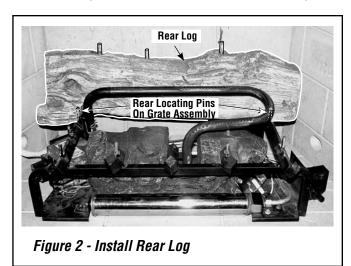

3. Place middle log onto left middle grate locating pin and the rear ember bed locating pin as shown in *Figure 3*.




Figure 3 - Install Middle Log

4. Place left and right front logs onto front grate locating pins as shown in *Figure 4*.




Figure 4 - Install Left and Right Front Logs

5. Place left top log onto rear log and middle log locating pins as shown in *Figure 5*.




Figure 5 - Install Left Top Log

6. Place the center top log onto the rear log locating pin and middle log locating pin as shown in *Figure 6*.






Figure 6 - Install Center Top Log

7. Place the right top log onto rear log locating pin and the right front log locating pin as shown in *Figure 7*.

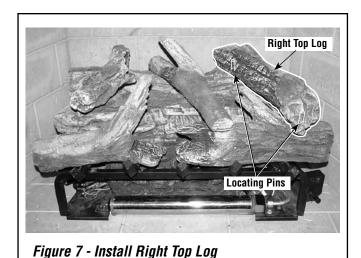

8. Place Left Top Twig (24" and 30" models only) onto corresponding notch on rear log as shown in *Figure 8*. The front of the Left Top Twig should be up against and behind the left top log.



9. Place the front ember bed log as shown in Figure 8.





Figure 9 - Completed Installation

Lennox™ reserves the right to make changes at any time, without notice, in design, materials, specifications, prices and also to discontinue colors, styles and products.

Consult your local distributor for fireplace code information.

