

Life Fitness 9500 Aerobic Trainer CVA Kit Installation

Kit Includes: (1) Transformer W/Line Cord, (1) PC Communications Cable, (3) Cable Ties, (1) Console Assembly

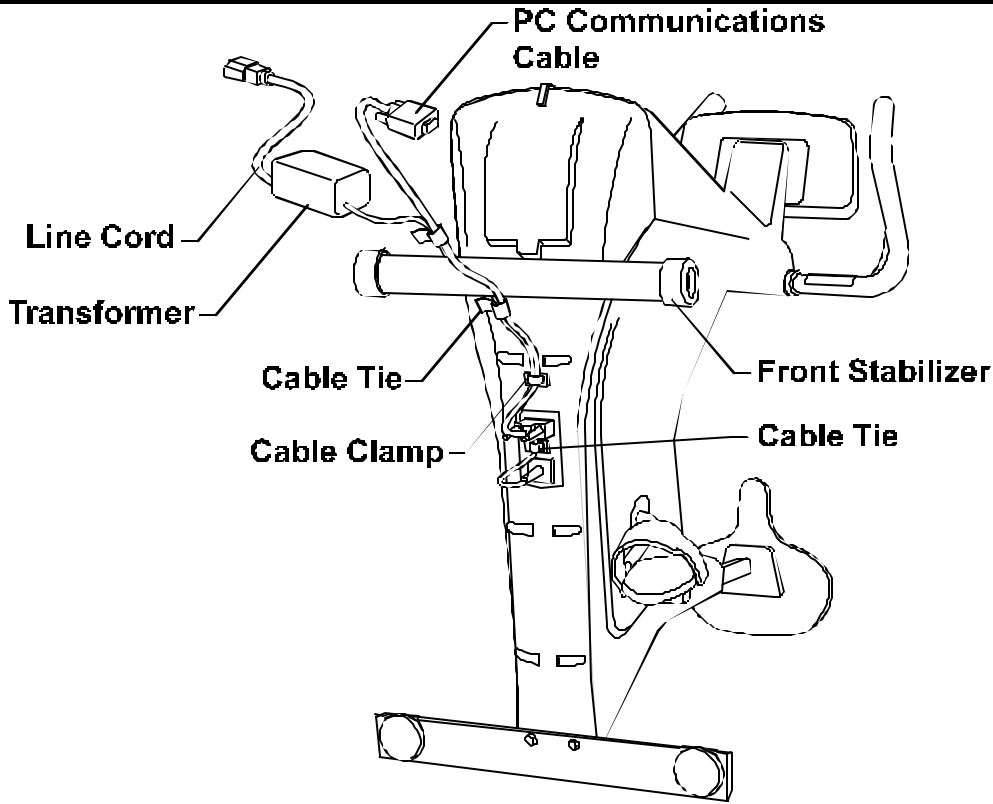


Figure 'A'

Step 1


Carefully tilt the Lifecycle 9500 Aerobic trainer backwards until it rests on the back of its seat.

Step 2

Carefully plug the PC COMMUNICATIONS CABLE into the bike connector housing (See Figure A). Finger tighten the thumb screws.

Step 3

Insert the TRANSFORMER PLUG into the power receptacle located on the connector housing. Align the TRANSFORMER LINE CORD with the CABLE TIE CLAMP leaving a small loop in the cord at the TRANSFORMER PLUG. Guide a REUSABLE CABLE TIE through the the CABLE TIE CLAMP and around the TRANSFORMER LINE CORD (Detail 'C'). Tighten the CABLE TIE CLAMP around the TRANSFORMER LINE CORD.

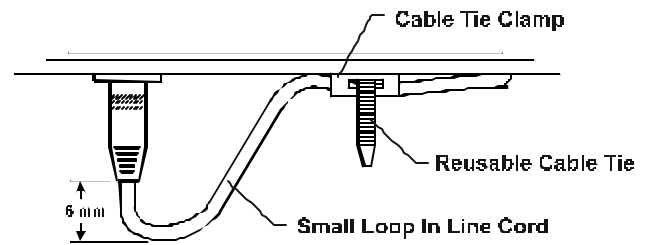

DETAIL 'C'

NOTE: DO NOT TRIM CABLE TIES

Step 4

Apply the two reusable cable ties to combine the TRANSFORMER LINE CORD and the PC COMMUNICATIONS CABLE as shown in Figure A. Route the combined cables over the top of the front STABILIZER BAR. Carefully tilt the bike back to the upright position.

WARNING!: TO PREVENT CABLE DAMAGE, THE PC COMMUNICATIONS AND TRANSFORMER CABLES MUST BE ROUTED ON TOP OF THE FRONT STABILIZER BAR AS SHOWN IN FIGURE A.