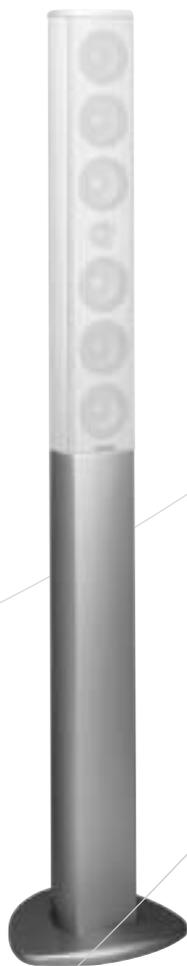∞ Infinity®

TOTAL SPEAKER SOLUTIONS
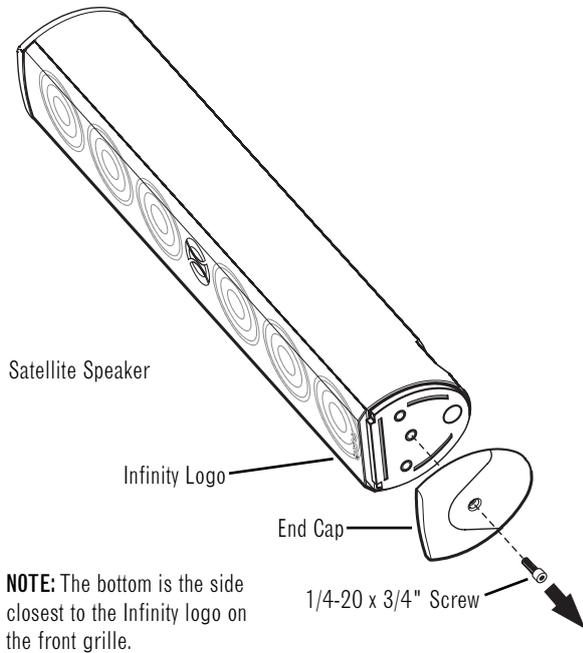
TSS-STAND4000
Owner's Guide

Installing the TSS-SAT4000

Step One
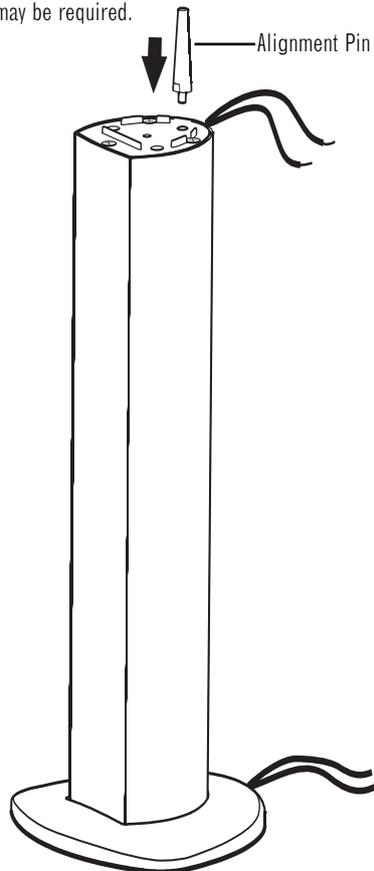
Remove the bottom end cap of the speaker by unscrewing the single center screw (Allen wrench included with satellite).
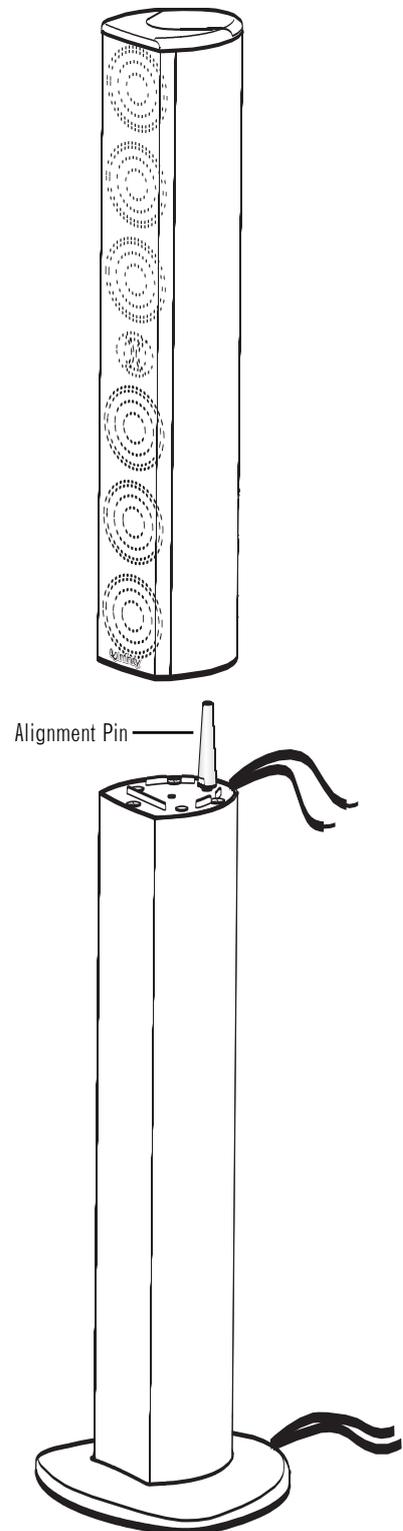
Satellite Speaker

Infinity Logo

End Cap

NOTE: The bottom is the side closest to the Infinity logo on the front grille.

1/4-20 x 3/4" Screw

Step Two

Attach alignment pin to stand, and run speaker wire up stand.
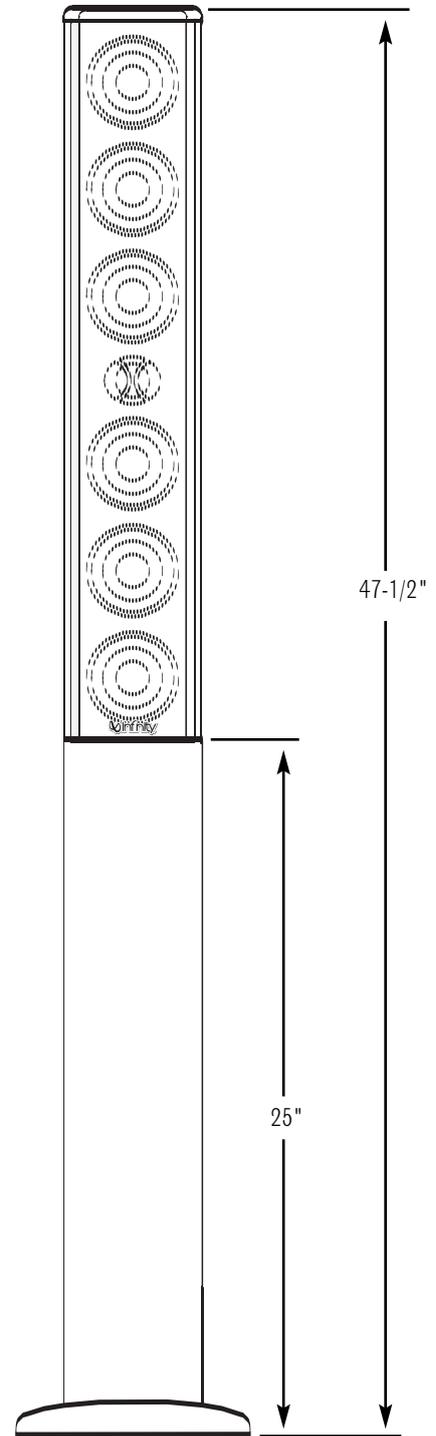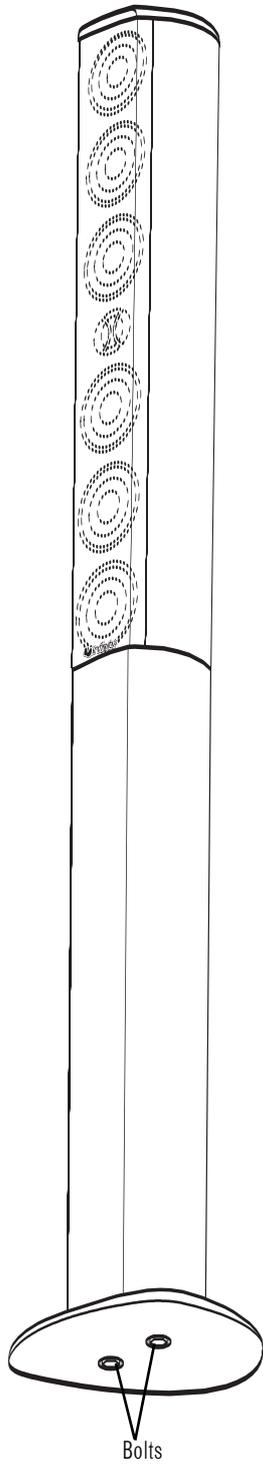**NOTE:** Needle-nose pliers may be required.

Alignment Pin

Step Three

Align and insert the alignment pin into the bottom of the speaker.

Alignment Pin

Step Four

Tighten the bolts on the bottom as shown. It's recommended that two people perform this step so that the speaker is supported while it's on its side and the bolts are being tightened. Attach speaker wire as described in TSS-SAT4000 Owner's Manual.

Bolts

47-1/2"

25"

∞ Infinity®

TECHNOLOGY • PERFORMANCE • DESIGN