



### Accessories

**Quick change drill chuck (Drill chuck set)**  
For Model: HR2811FT, HR2810T  
Part No. 194079-2



**Dust cup**  
Bit dia: 6-14.5mm Part No. 421342-3  
Bit dia: 12-16mm Part No. 421664-1



**Dust cup set**  
Part No. 194580-7



**Dust extractor attachment**  
Part No. 193472-7





### Comparison of Drilling Efficiency

Note: It may differ under some conditions.

#### Drilling

Note: Numbers in the charts below are relative values when the capacities of competitor "B" are indexed at 100.


Test conditions: Drilled in concrete with compressive strength of 40N/mm<sup>2</sup>.

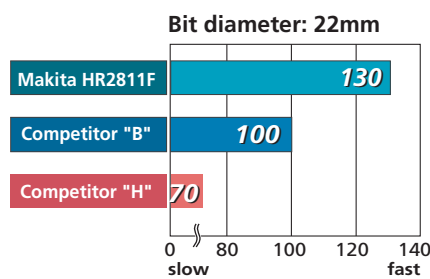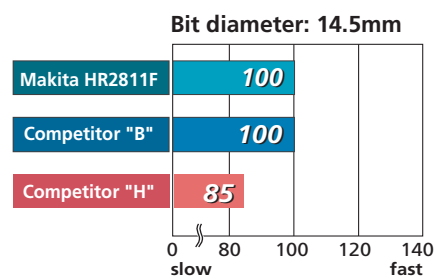

#### Chipping

Note: Numbers in the charts below are relative values when the capacities of competitor "H" are indexed at 100.

Test conditions: Chipped concrete with compressive strength of 40N/mm<sup>2</sup>, and measured the amount of concrete removed.

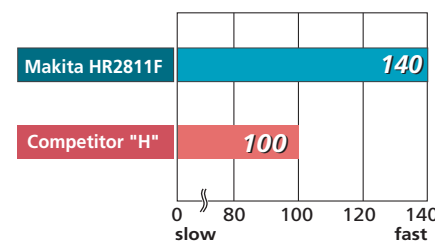

	Combination Hammers HR2811F/FT, HR2810/T		Rotary Hammer HR2800	
	HR2811F	HR2810T	HR2810	HR2800
Double Insulation	325	325	325	325
Variable Speed	800W	800W	800W	800W
Reversing	80mm (3-1/8")	80mm (3-1/8")	80mm (3-1/8")	80mm (3-1/8")
Torque Limiter	28mm (1-1/8")	28mm (1-1/8")	28mm (1-1/8")	28mm (1-1/8")
Dust Collecting	13mm (1/2")	13mm (1/2")	13mm (1/2")	13mm (1/2")
SDS-Plus Shank	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")
Carrying Case	Impacts per minute (ipm) 0 - 4,500	0 - 4,500	0 - 4,500	0 - 4,500
Built-in Job Light (HR2811F, HR2811FT only)	No load speed (rpm) 0 - 1,100	0 - 1,100	0 - 1,100	0 - 1,100
	Dimensions 320 x 89 x 225mm	345 x 89 x 225mm	314 x 89 x 225mm	339 x 89 x 225mm
	Net weight 3.3kg (7.3lbs)	3.4kg (7.5lbs)	3.2kg (7.1lbs)	3.2kg (7.1lbs)
	Power supply cord 4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)
	Standard Equipment Quick Change Drill Chuck (HR2811FT, HR2810T only), Depth Gauge, Side Grip (Tool does not come with bit.)			

Items of standard equipment and specifications may differ by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23326-2 2007-08





## Combination Hammers

HR2811F/FT, HR2810/T 28mm (1-1/8")

Rotary Hammer HR2800 28mm (1-1/8")

Satisfy Professional's Needs

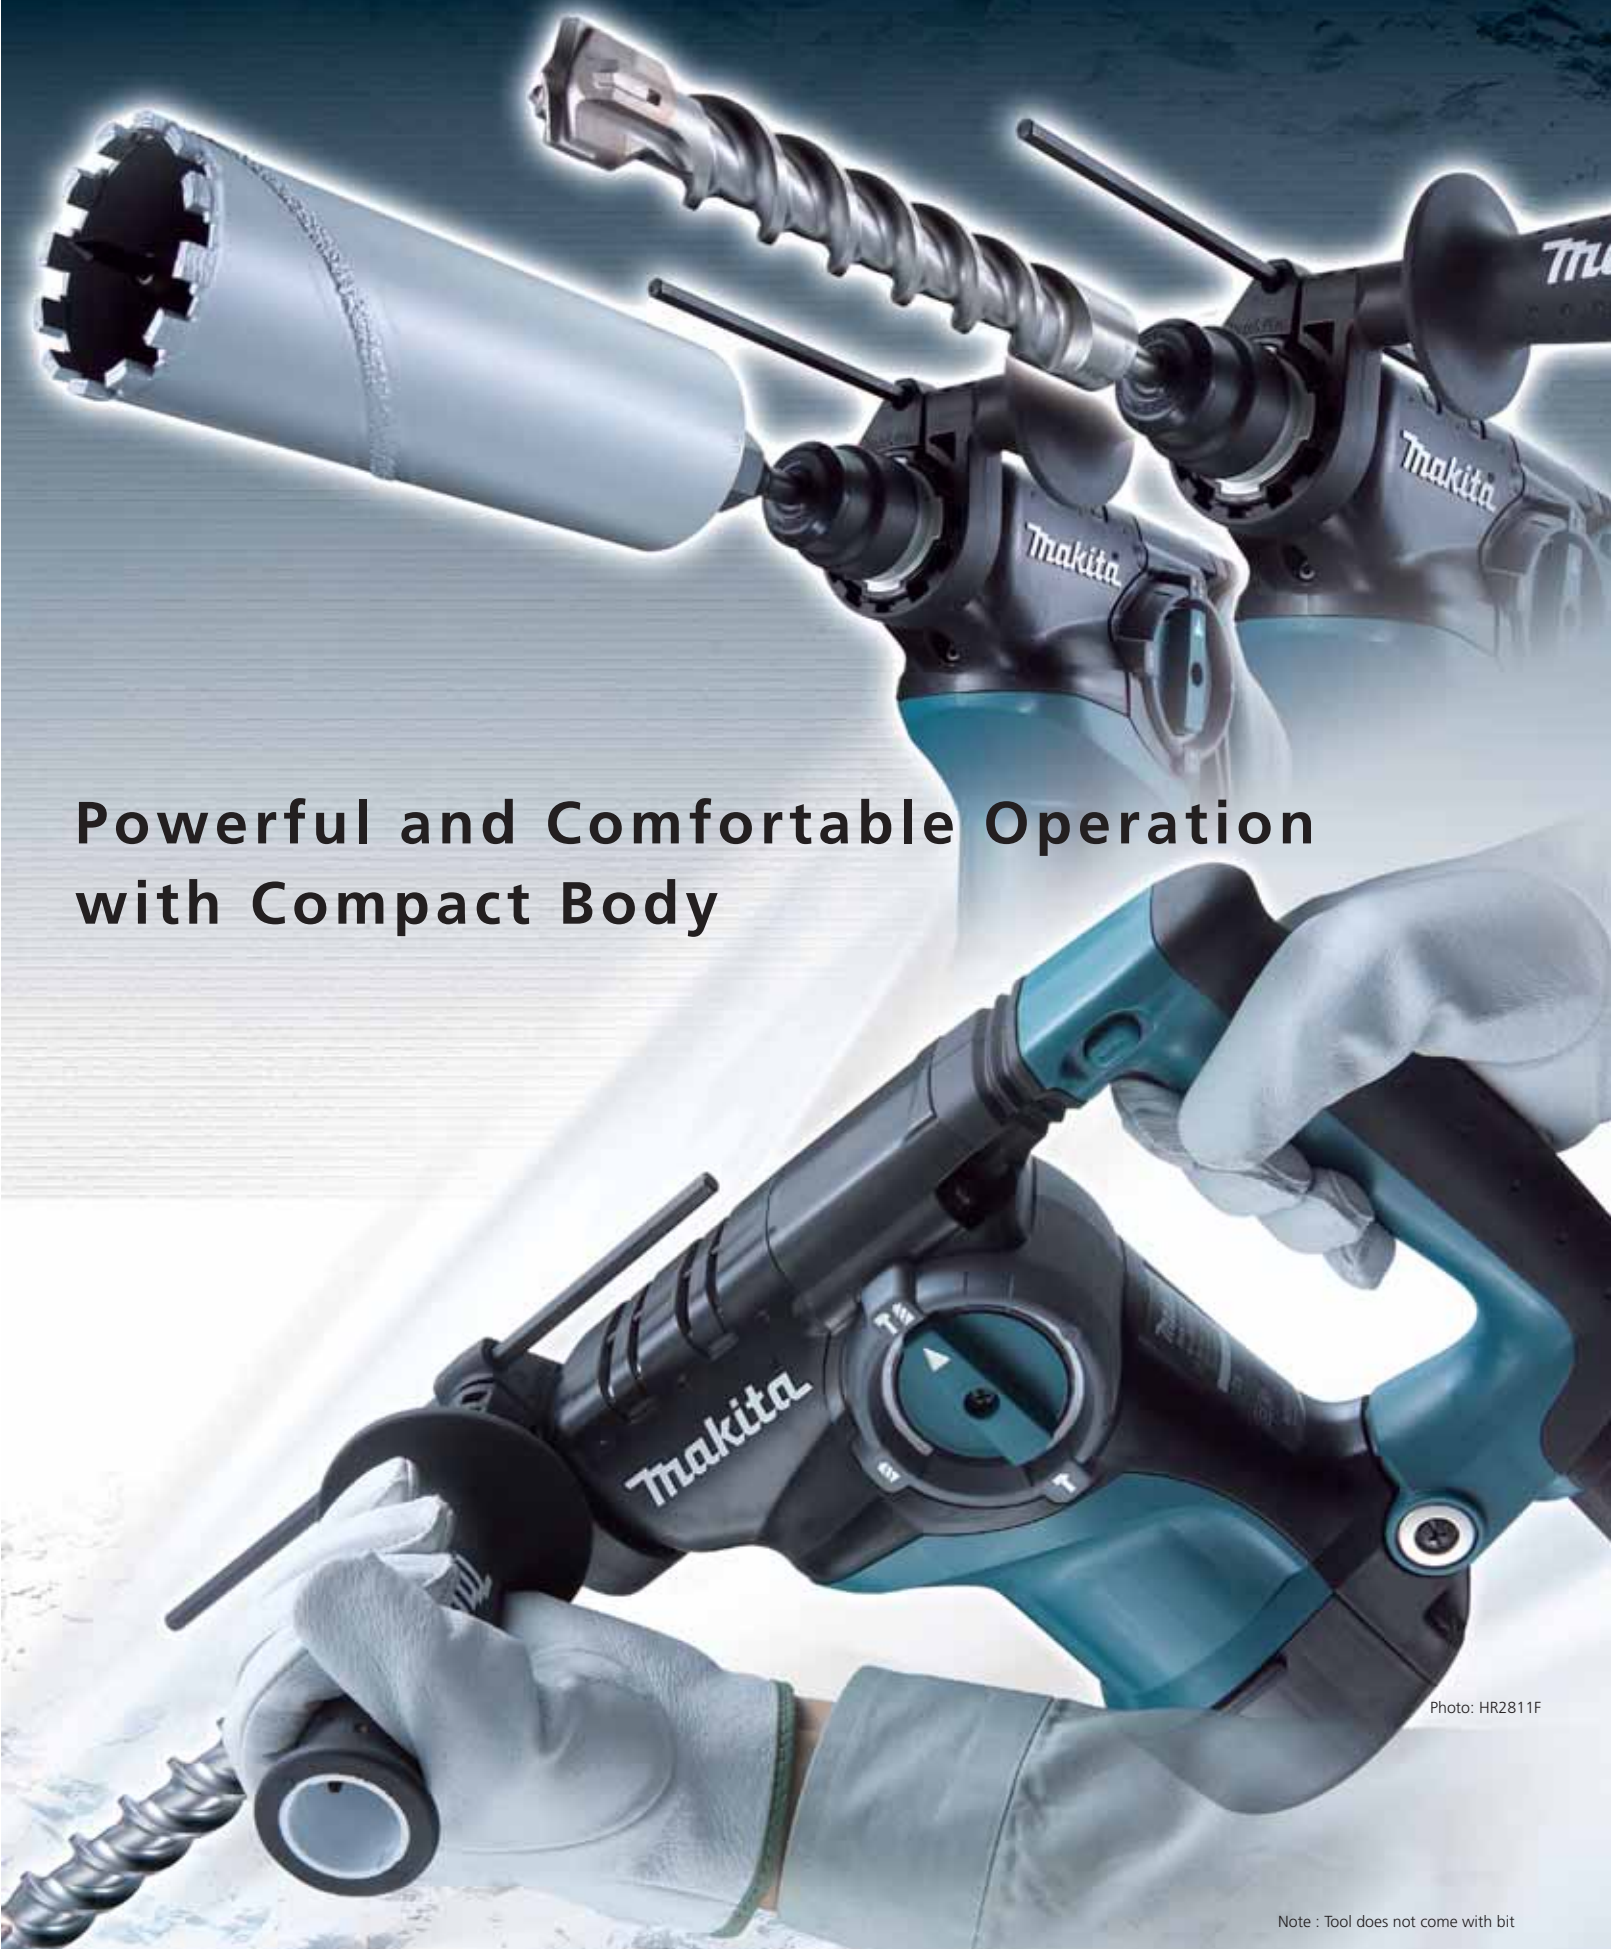

**Powerful and Comfortable Operation with Compact Body**

Photo: HR2811F

Note : Tool does not come with bit



# Powerful and Comfortable Operation

With Low vibration and Highest-in-class efficiency in drilling and chipping

## Compact Body for Better Handling

L-shaped Motor Housing shortens each distance between Rear/ Side Handles and Bit Tip

▶ More compact than 24mm Rotary Hammers



▶ Lighter weight and more compact than 30mm Rotary Hammers




Powerful  
**800**  
W

## 3 MODE

**Hammering with Rotation**

**Rotation**

**Hammering**



Chisel rotates full 360 degrees with 40 different locking positions.



**Vibration Absorbing Grip**  
Spring is mounted to absorb vibration.  
(HR2811F / HR2811FT only)



**LED Job Light**  
(HR2811F / HR2811FT only)



**Quick Change Chuck**  
SDS-plus chuck can be replaced to keyless drill chuck in a second.  
(HR2811FT / HR2810T only)



**HR2811F**    Vibration Absorbing Grip    LED Job Light  
**HR2811FT**    Vibration Absorbing Grip    LED Job Light  
Quick Change Chuck

Photo: HR2811F



**HR2810**  
**HR2810T**    Quick Change Chuck

Photo: HR2810

## 2 MODE

**Hammering with Rotation**

**Rotation**



**HR2800**


Tool does not come with bit.

Photo: HR2811F


**Reversing Switch**  
Operable by one hand

**Rubberized Grip**  
Provides more control and comfort.

**Bumper**  
Protects the surface of workpiece and machine.

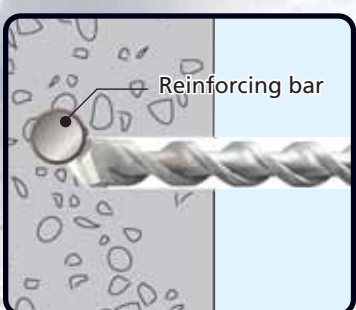


**Torque Limiter**  
Stops bit rotation when hitting reinforcement.

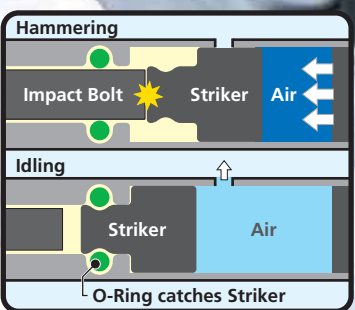

**No Hammering when Idling**  
Ensures machine's long life.



**One-Touch Sliding Chuck**  
for easy SDS-plus bit changes

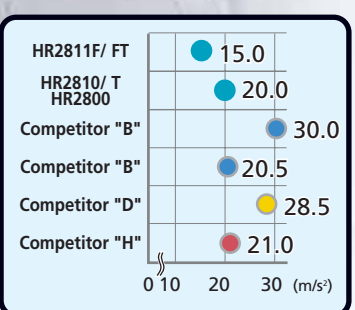

**Comparison of Vibration**