



# DSU III S2W

## 2-Wire Switched 56 DSU/CSU

### Product Features


- Dialing by V.25 bis, EIA-366, enhanced AT command set, keypad or stored number
- Compatible with Northern Telecom Datapath™ technology
- EIA-232 and V.35 DTE interfaces
- Auxiliary EIA-232 or EIA-366 dialing interface
- Multiple tests and diagnostics
- Synchronous and asynchronous features (including 38.4 and 57.6 kbps) DTE rates
- T-Link rate adaption protocol
- Auto answer of incoming calls
- Industry-leading five-year North American warranty

The ADTRAN® DSU III S2W is a **high-performance data service unit/channel service unit (DSU/CSU) based on Northern Telecom Datapath® technology**. The DSU III S2W incorporates advanced features utilizing microprocessor and VLSI technology in a standalone package. Using the Northern Telecom T-Link® rate adaption protocol and time compression multiplexing (TCM), the DSU III S2W transports customer synchronous (up to 64 kbps) or asynchronous (up to 57.6 kbps) data over a 2-wire local loop to the network. Both EIA-232 and V.35 DTE interfaces are provided for all data rates.

The DSU III S2W supports manual (invoking a stored number or keypad) or automatic dialing. DTE interface dialing is supported by use of AT commands or V.25 bis in-band dialing. A separate DB-25 connector is provided for EIA-366 parallel dialing or out-of-band AT dialing.

The unit responds to standard loopback commands from the service provider and provides extensive test capabilities. Tests include DTE, DTE and loop, DTE with test pattern, and loop only.

The front panel of the standalone DSU III S2W contains a two-line by 16-character LCD display and seven LEDs. The front panel keypad operates a simple menu structure which accesses setup, selection of test modes, local configuration, and manual or automatic dialing from stored numbers. Configuration is also available by using the AT command set.

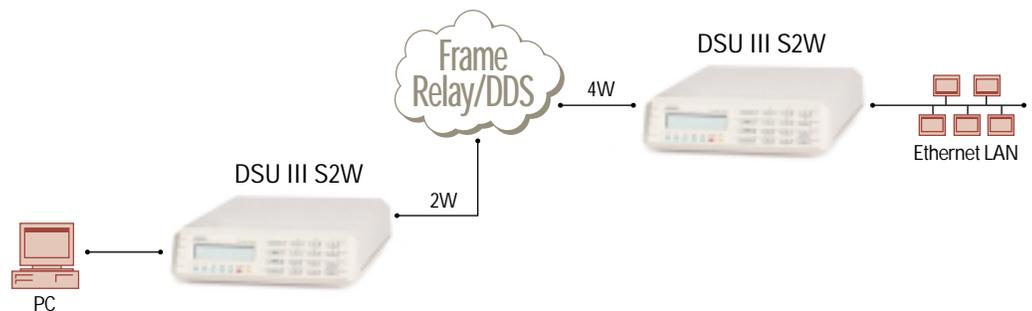



ADTRAN, Inc.

Attn: Enterprise Networks  
901 Explorer Boulevard  
Huntsville, AL 35806

P.O. Box 140000  
Huntsville, AL 35814-4000

256 963-8000 voice  
256 963-8699 fax  
256 963-8200 fax back

**General Information**  
800 9ADTRAN  
info@adtran.com  
www.adtran.com

**Pre-Sales  
Technical Support**  
800 615-1176 toll-free  
application.engineer@adtran.com  
www.adtran.com/support

**Where to Buy**  
877 280-8416 toll-free  
channel.sales@adtran.com  
www.adtran.com/where2buy

**Post-Sales  
Technical Support**  
888 423-8726  
support@adtran.com  
www.adtran.com/support

**ACES Installation &  
Maintenance Service**  
888 874-ACES  
aces@adtran.com  
www.adtran.com/support

**International Inquiries**  
256 963 8000 voice  
256 963-6300 fax  
international@adtran.com  
www.adtran.com/international

**For the regional office  
nearest you, visit:**  
www.adtran.com/where2buy



ADTRAN is an  
ISO 9001: 2000 certified supplier.



ADTRAN is a  
TL 9000 3.0 certified supplier.

61200015L2-8E April 2002  
Copyright © 2004 ADTRAN, Inc.  
All rights reserved.

# DSU III S2W

## 2-Wire Switched 56 DSU/CSU

## Product Specifications

### Operating modes

- 2-wire Switched 56 (SW56)

### DTE Rates

- DTE-to-loop rate matching in both switched and virtual private line mode
- **Synchronous rates:** 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 48, 56, and 64 kbps
- **Asynchronous rates:** 1.2, 2.4, 4.8, 9.6, 19.2, 38.4 and 57.6 kbps

### Network Interface

- 2-wire SW56 based on Northern Telecom Datapath® technology

### DTE Interface

- Both EIA-232 and V.35 electrical and physical DTE interfaces

### Line Interface

- RJ-11

### Dialing Options

- EIA-366 or AT out-of-band
- AT in-band dial commands
- Front panel keypad (standalone unit only)
- V.25 bis in-band (async, bi-sync, SDLC)
- Switch stored number
- Switch speed dial
- DTR stored number (pulsed/constant)

### Diagnostics

- **Local:** DTE, DTE and loop, DTE with test pattern, loop only, test pattern
- **Remote:** V.54 with 2047 and 511 test patterns or data from DTE

### Agency Approvals

- UL 1950, CSA
- FCC Part 15, Class A

### Environment

- **Operating:** 0°C to 50°C (32°F to 122°F)
- **Storage:** -20°C to 70°C (-4°F to 158°F)
- Relative Humidity: Up to 95%, non-condensing

### Physical

#### Dimensions

- **Standalone:** 2.25" H, 8.75" W, 10.25" D

#### Weight

- **Standalone:** 3 lbs

#### Power

- 115 vAC, 60 Hz, 8 watts

### Product Includes

- 6-pin to 6-pin modular cable
- User manual

## Ordering Information

Equipment	Part #
DSU III S2W	1200015L2



Specifications subject to change without notice. ADTRAN is a registered trademark of ADTRAN, Inc. All registered trademarks and trademarks mentioned in this publication are the property of their respective owners.