




SPECIFICATIONS  
**AKCVQP80**  
 CENTRAL VACUUMS

**PLASTIC CENTRAL VACUUM POWER UNIT**

- **Motor**  
 Three stage 120 volt, double ball bearing with tangential bypass discharge and thermoset fan end bracket. 13.13 amps with Quiet Motor Technology.
- **Power Unit Body**  
 Durable plastic body will not rust, dent, or chip.
- **Performance**  
 CFM at 2" opening: 96  
 Water Lift: 136"  
 Air Watts: 465
- **Collection**  
 9 Gallon Bagged or Bagless collection canister with HEPA membrane filter, made with Dupont™ Teflon® fluoropolymer.
- **Recommended Home Size**  
 Homes up to 8,000 square feet.
- **Mounting**  
 Includes metal mounting bracket, an extra utility inlet, and exhaust muffler for added sound protection.
- **Shipping Information**  
 UPC: 0-83162-  
 Shipping Weight: lbs.

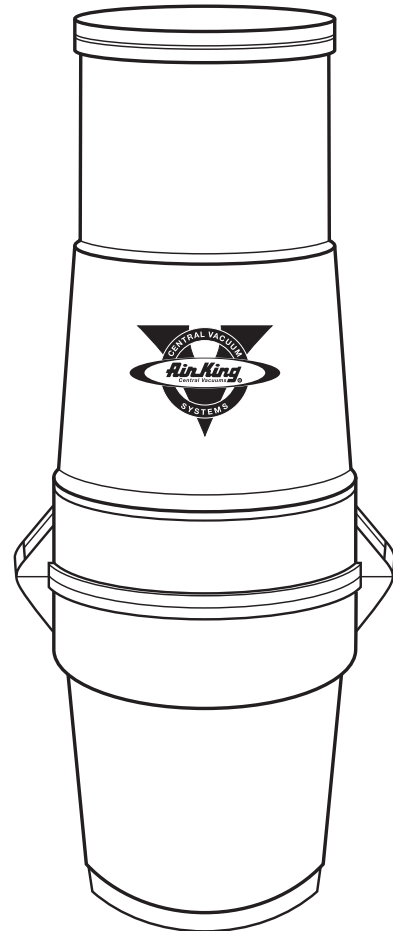

<b>PROJECT</b>							<b>ARCHITECT</b>			
<b>LOCATION</b>							<b>ENGINEER</b>			
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>			<b>DATE</b>
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



**U.S.:** 820 Lincoln Drive  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048

**Canada:** 110 Glidden Road  
 Brampton, Ontario L6T 2J3  
 Tel: (905) 456-2033  
 Fax: (905) 456-1015