

**TOSHIBA**

Leading Innovation >>>

Product Catalog Mar. 2013

SSD/HDD

# Storage Products



SEMICONDUCTOR & STORAGE PRODUCTS

<http://www.toshibastorage.com>

## Toshiba Storage Products Underpin the Information Society



### Invention

#### ► NAND Flash Invention



In 1984, Toshiba invented a new type of semiconductor memory called flash memory. In 1987, Toshiba developed NAND flash memory, which became an internationally standardized memory device. After that, Toshiba has been striving to be a world leader in NAND flash technology and production.

### Award

#### ► GOOD FACTORY AWARD



The Good Factory Awards were founded in 2011 by the Japan Management Association (JMA) to commend excellent Japanese factories in Asia for achieving excellent results in terms of kaizen (continuous improvement) and kakushin (innovation). Toshiba Information Equipment (Philippines), Inc., which manufactures hard disk drives (HDDs) and solid state drives (SSDs), won the Factory Management Award in October 2011 for "a generally high level of factory operation and good overall balance."

#### ► Grand Prize for Excellence in Energy Efficiency and Conservation

Director-General's Prize, the Agency for Natural Resources and Energy (Product Category & Business Model Category)

Enterprise SSDs: MK4001GRZB, MK2001GRZB, MK1001GRZB



This commendation program publicly recognizes enterprises, factories and offices in Japan's industrial, business and transportation sectors for their efforts in energy conservation as well as business organizations that have developed products with excellent energy efficiency. Its objectives are to raise energy conservation awareness, promote energy conservation products, cultivate industrial fields involved in energy conservation and help create a society where energy conservation is the norm. In 2011, Toshiba's enterprise SSDs, MK4001GRZB, MK2001GRZB and MK1001GRZB, were awarded the Director-General's Prize of the Agency for Natural Resources and Energy in the Product Category & Business Model Category.

### Environment

#### ► Halogen-Free

The built-in type solid state drive (SSD) and hard disk drive (HDD) products in this catalog are classified as Halogen-Free. For the avoidance of doubt, Halogen-Free SSD or HDD products may not be entirely free of bromine and chlorine, and may contain any other element of the halogen family. For the definitions of Halogen-Free of Toshiba Semiconductor & Storage Products Company, and details in each product series, please contact your TOSHIBA sales representative in the last page of this catalog.

#### ► RoHS

Restriction of the use of certain Hazardous Substances (2011/65/EU)

The directive adopted by the European Union (EU) that restricts the use of six hazardous materials, lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) and polybrominated diphenyl ether (PBDE), in the manufacture of computers, telecommunication equipment, home appliances, etc. The RoHS directive was recast in 2011 and has been enforced in January 2013. All the SSDs and HDDs listed in this catalog are compatible with the RoHS directive.

## Client SSDs and HDDs Overview and Structure >>

### SSD Solid State Drive

#### Client SSD

##### Connector (Interface)


Has an HDD-compatible SATA interface and an mSATA interface suitable for small-form-factor appliances.

##### Controller

The heart of an SSD that delivers fast read/write performance, prolonged write/erase cycle life and enhanced reliability.

##### NAND Flash Memory

Data is stored in a NAND flash memory array, which features Toshiba's MLC NAND technology to achieve low costs and high storage capacities.

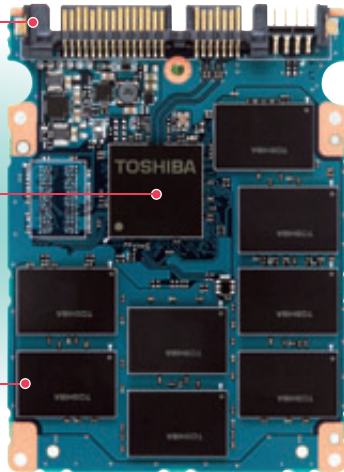

SSD is a storage product\*1 that uses semiconductor memory (NAND flash memory)\*2 as a storage element. Since SSDs have no mechanical moving parts, they are superior to HDDs in terms of:

1) read performance, 2) resistance to shock and vibration and 3) silent operation. Additionally, SSDs feature low power consumption in standby mode.

\*1 Toshiba collectively refers to products that can store data such as SSDs and HDDs as "storage products".

\*2 NAND flash memory is a nonvolatile semiconductor memory.

### HDD Hard Disk Drive

#### Client HDD

##### Connector (Interface)

Has the most commonly used SATA port for system interfacing.

##### Spindle Motor

A key part for rotating a medium at high rpm. The platters are spun at speeds varying from 5,400 rpm in HDDs for PC applications to 15,000 rpm in enterprise HDDs.

##### Medium

A storage medium that holds data. 2.5-inch HDDs can hold up to 500 GB of data per platter.

##### Magnetic Head

Data is read from and written to a medium via the magnetic head.




An HDD is a storage product that magnetically stores data in a disk recording medium. Data is written to and read from a platter, which rotates at high speeds, via a magnetic head that operates very close to the disk surface. Compared to SSDs, increasing storage capacities is easier for HDDs. Additionally, HDDs provide higher cost performance (lower price per gigabyte) than SSDs.

## SSD and HDD Characteristics >>


(Tested by Toshiba)

	SSD (THNSNF128GBSS)	HDD (MQ01ABD100)
Case Temperature	(Op.): 0°C to 70°C (Non-Op.): -40°C to 85°C	(Op.): 5°C to 55°C (Non-Op.): -40°C to 65°C
Vibration	(Op.): 196 m/s <sup>2</sup> {20 G} (Non-Op.): 196 m/s <sup>2</sup> {20 G}	(Op.): 9.8 m/s <sup>2</sup> {1.0 G} (Non-Op.): 49 m/s <sup>2</sup> {5.0 G}
Shock	(Op.): 14,700 m/s <sup>2</sup> {1,500 G} (Non-Op.): 14,700 m/s <sup>2</sup> {1,500 G}	(Op.): 1,960 m/s <sup>2</sup> {200 G} (Non-Op.): 8,820 m/s <sup>2</sup> {900 G}
Acoustic Noise	None	23 dB


Data Transfer Rate (Sequential)

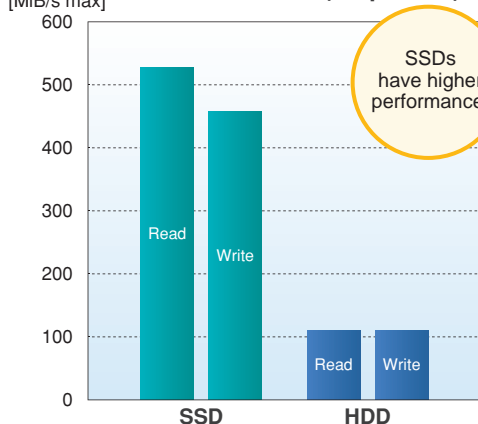

OS Boot Time

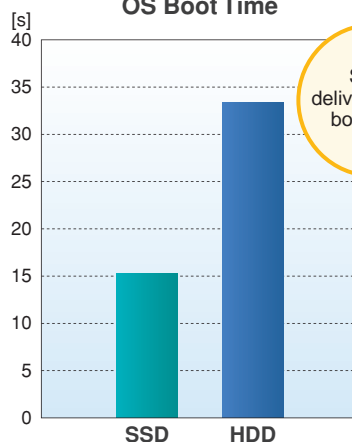

Bit Price (Price Per Gigabyte)

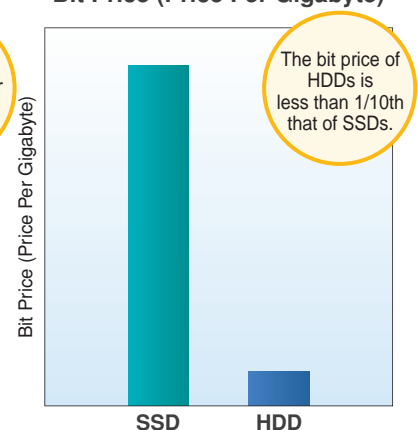



# Storage Products >>

## SEMICONDUCTOR & STORAGE PRODUCTS

### Client SSDs and HDDs >>

#### Client storage products suitable for everyday digital devices

Various electronic products such as high-end PCs, desktop PCs, televisions and video recorders are equipped with storage devices. However, different products have different requirements for data storage. To meet diverse customer needs, Toshiba offers a wide range of client storage products suitable for various applications.



#### Client SSDs HG5d Series

- Combines multi-level-cell (MLC) NAND flash technology with a high-performance flash controller to improve storage capacity and performance.
- Offers sufficient reliability for general and high-end PC applications.
- Low power consumption of less than 0.1 W at MobileMark® 2007 workload.

MobileMark® is a registered trademark of the Business Applications Performance Corporation in the United States.

	Model	Capacity*4	NAND Type	Interface	Data Transfer Rate (MB/s{MiB/s}Max)*5		Shock (Op.) 0.5 ms half s/w. (m/s²){G}	Case Temp. (Op.) (°C)	Dimensions Height / Width / Length (mm)	Weight (g Typ.)	Supply Voltage (V)
					Seq. Read	Seq. Write					
2.5-inch {64mm}, 9.5-mmH Case*3	THNSNH512GBST	512 GB	MLC	SATA	534 {510}	482{460}	14,700 {1,500}	0-70		55	5
	THNSNH256GBST	256 GB				471{450}				51	
	THNSNH128GBST	128 GB				450{430}					
	THNSNH060GBST	60 GB									
2.5-inch {64mm}, 7.0-mmH Case*3	THNSNH512GCST	512 GB	MLC	SATA	534 {510}	482{460}	14,700 {1,500}	0-70		53	5
	THNSNH256GCST	256 GB				471{450}				49	
	THNSNH128GCST	128 GB				450{430}					
	THNSNH060GCST	60 GB									
mSATA Modules	THNSNH256GMCT	256 GB	MLC	mini SATA	534 {510}	471{450}	14,700 {1,500}	0-80		7.8	3.3
	THNSNH128GMCT	128 GB				450{430}				7.5	
	THNSNH060GMCT	60 GB									

### Hybrid Drives >>

Hybrid drives combine an HDD and NAND flash memory to provide the HDD advantages of high capacity and low cost and the SSD advantage of fast access speed. Toshiba's hybrid drives integrate its advanced and well-proven technologies that Toshiba, the inventor of flash memory, has accumulated through years of development of NAND flash memory, SSDs and HDDs. Toshiba's hybrid drives can be installed in electronic devices as a single entity without requiring any special BIOS settings or driver software.



(Image of Hybrid Drive)

Model	Capacity*4	NAND Type	Rotation Speed (rpm)	Interface	Power Consumption		Shock (Op.) / 2 ms half s/w. (m/s²){G}	Buffer Size (MiB)*5	Acoustic Noise / Idle (dB Ave.)	Temp. (Op.) (°C)	Dimensions Height / Width / Length (mm)	Weight (g Max)	Supply Voltage (V)
					Low Power Idle (W Typ.)	Read / Write (W Typ.)							
MQ01ABD100H	1 TB	SLC 8 GiB*5	5,400	SATA	0.75	3.30/3.00	3,920 {400}	32	23	5-55	9.5/69.85/100.0	117	5
MQ01ABD075H	750 GB												

\*2.5-inch" and "3.5-inch" mean the form factors of HDDs or SSDs. They do not indicate drive's physical size.

\*3: The 2.5-inch case has the same form factor as 2.5-inch HDD.

\*4: 1 MB (megabytes) = 1,000,000 bytes, 1 GB (gigabytes) = 1,000,000,000 bytes, 1 TB (terabytes) = 1,000,000,000,000 bytes

\*5: KiB (kibibytes) = 1,024 (2<sup>10</sup> bytes), MiB (mebibytes) = 1,048,576 (2<sup>20</sup> bytes), GiB (gibibytes) = 1,073,741,824 (2<sup>30</sup> bytes)

\*6: Ultrabook™ is a trademark of Intel Corporation in the United States and other countries.

\*7: TCG is the Trusted Computing Group.

\*8: A technology that utilizes the encryption feature by securely invalidating data when accessed from any unauthorized system.

\*9: Does not support high availability operation required for mission-critical systems.

\*10: Temperature range for 24x7 operation: -15 to +70°C (HDD case). Does not support high-availability operation required for business-critical systems.



## 2.5-inch {64mm} 5,400-rpm Series

- ▶ Available in a wide range of capacities.
- ▶ Suitable for notebook and mobile PCs.
- ▶ Also suitable for applications that require high-capacity storage such as TVs and HDD recorders.

Model	Capacity*4	Rotation Speed (rpm)	Interface	Power Consumption		Shock (Op.)/ 2 ms half s/w. (m/s²){G}	Buffer Size (MiB)*5	Acoustic Noise / Idle (dB Ave.)	Temp. (Op.) (°C)	Dimensions Height / Width / Length (mm)	Wipe technology	24x7 Operation	Weight (g Max)	Supply Voltage (V)					
				Low Power Idle (W Typ.)	Read / Write (W Typ.)														
MQ01ABD100	1 TB	5,400	SATA	0.55	1.5	3,920 {400}	8	23	5-55	9.5/69.85/100.0			117	5					
MQ01ABD075	750 GB							17					107						
MQ01ABD050	500 GB																		
MQ01ABD032	320 GB																		
MQ01ABD025	250 GB																		


## 2.5-inch {64mm} 5,400-rpm, 7-mmH Series

- ▶ Thin-form-factor series.
- ▶ Suitable for mobile applications such as Ultrabooks™\*6 and notebook PCs.

MQ01ABF050	500 GB	5,400	SATA	0.55	1.5	3,920 {400}	8	19	5-55	7.0/69.85/100.0			92	5
MQ01ABF032	320 GB													
MQ01ABF025	250 GB													

## 2.5-inch {64mm} 7,200-rpm Wipe Technology Series

- ▶ Suitable for PCs, multifunction printers (MFPs) and security-sensitive appliances.
- ▶ Self-encrypting drives without wipe technology are also available (Compliant with TCG\*7 Opal V1.0).

MK6461GSYG	640 GB	7,200	SATA	0.8	2.1	3,185 {325}	16	26	5-55	9.5/69.85/100.0	 *9		115	5					
MK5061GSYG	500 GB							23					98						
MK3261GSYG	320 GB																		
MK2561GSYG	250 GB																		
MK1661GSYG	160 GB																		

## 2.5-inch {64mm} Value-Added Series

- ▶ Rotational vibration compensation and 24x7 operation.
- ▶ Suitable for industrial applications and blade server systems.

MK5061GSYB	500 GB	7,200	SATA	0.8	2.1	3,185 {325}	16	26	5-55	9.5/69.85/100.0		●*10	115	5
MK2561GSYB	250 GB							23						
MK1661GSYB	160 GB													
MK8061GSYB	80 GB													
MK8050GACY	80 GB	4,200	PATA	0.8	2.0	2,940 {300}	8	22	-20-70	9.5/69.85/100.0		●*11	98	5
MK1060GSCX	100 GB		SATA					-30-85						

## 3.5-inch {89mm} Series

- ▶ High capacity and high performance.
- ▶ Suitable for desktop PCs and PC servers.
- ▶ Also usable for digital home appliances.

DT01ACA300	3 TB	7,200	SATA	5.2	6.4	686 {70}	64	27	0-60	26.1/101.6/147			680	5 12
DT01ACA200	2 TB			3.7	6.4		32	25					450	
DT01ACA100	1 TB													
DT01ACA050	500 GB													
DT01ABA300V	3 TB	5,940	SATA	4.2	5.4	686 {70}	32	24	0-60	26.1/101.6/147			680	5 12
DT01ABA200V	2 TB	5,700		3.3	4.7			22					450	
DT01ABA100V	1 TB													
DT01ABA050V	500 GB													

### Enterprise SSDs and HDDs >>



**STORAGE PRODUCTS**

Enterprise SSDs and HDDs  
ideal for server and storage system applications

As industry gravitates toward cloud computing and big data, it is important to select appropriate storage products capable of handling the explosive growth in data transactions. Toshiba offers an extensive portfolio of enterprise storage products to meet the performance and reliability needs.







Enterprise SSDs: MK4001GRZB, MK2001GRZB, MK1001GRZB

#### Features of High-Performance Enterprise HDDs

- ▶ Offers high data transfer rates for high-end and mid-range servers.
- ▶ Provides excellent data transfer and random read/write performance at 15k and 10k rpm.
- ▶ The high-performance 2.5-inch HDDs are physically smaller and consume less power than 3.5-inch HDDs. The 2.5-inch HDDs help reduce the overall size and power consumption of the systems in which they are used.
- ▶ The AL13SEL Series has a 2.5-inch high-speed drive in a 3.5-inch bracket. It excels typical 3.5-inch high-speed drives in terms of energy efficiency.

#### Features of High-Capacity Enterprise HDDs

- ▶ Toshiba offers high-capacity HDDs with capacities up to 4 TB, which are suitable for storage system and data center applications.
- ▶ Supports a highly reliable and highly extensible 6-Gbps Serial Attached SCSI (SAS) interface (MG03SCA300/200/100).
- ▶ Supports Serial ATA (SATA) 6 Gbps and thus helps reduce system costs (MG03ACA400/300/200/100).
- ▶ Provides rotational vibration compensation to maintain performance in the presence of vibrations from a cooling fan or an adjacent HDD.

	Model	Capacity <sup>4)</sup>	Rotation Speed (rpm)	Interface	Max Data Rate (sustained) (MB/s)	Power Consumption (Low Power/Idle) (W Typ.)	Average Seek Time (Read/Write) (ms)	Average Latency (ms)	Buffer Size (MiB) <sup>5)</sup>	Acoustic Noise / Idle (dB Typ.)	Case Temp. (Op.) (°C)	Encrypt. (Optional)	Dimensions Height / Width / Length (mm)	Weight (g Max)	Supply Voltage (V)
 2.5-inch (64mm), 15,000rpm	MK3001GRRB	300 GB	15,000	SAS 6 Gbps	211	4.0	2.7/3.0	2.00	32	33	5-55	●	15.00 69.85 100.45	225	5 12
	MK1401GRRB	147 GB				3.8									
 2.5-inch (64mm), 10,500rpm	AL13SEB900	900 GB	10,500	SAS 6 Gbps	195	3.9	3.7/4.1	2.86	64	30	5-55	●*	15.00 69.85 100.45	240	5 12
	AL13SEB600	600 GB				3.4									
	AL13SEB450	450 GB				3.4									
	AL13SEB300	300 GB				3.0									
 3.5-inch (89mm), 10,500rpm	AL13SEL900	900 GB	10,500	SAS 6 Gbps	195	3.9	3.7/4.1	2.86	64	31	5-55		26.1 101.6 147.0	500	5 12
	AL13SEL600	600 GB				3.4									
	AL13SEL450	450 GB				3.4									
	AL13SEL300	300 GB				3.0									
 3.5-inch (89mm), 7,200rpm	MG03SCA400	4 TB	7,200	SAS 6 Gbps	165	6.0	8.5/9.5	4.17	64	31	5-55	●*	26.1 101.6 147.0	720	5 12
	MG03SCA300	3 TB			155										
	MG03SCA200	2 TB													
	MG03SCA100	1 TB													
	MG03ACA400	4 TB	7,200	SATA 6 Gbps	165	6.0	8.5/9.5	4.17	64	31	5-55	●	26.1 101.6 147.0	720	5 12
	MG03ACA300	3 TB			155										
	MG03ACA200	2 TB													
	MG03ACA100	1 TB													

\* Scheduled to be available in March 2013


#### >> Self Encrypting Drives (SEDs) for Enterprise Applications


Toshiba offers various SSDs and HDDs for enterprise use with self-encrypting capabilities. Called SEDs, these drives support 256-bit AES to safeguard sensitive data against incidents of negligence such as loss or theft of equipment or inappropriate disposal. Additionally, SEDs provide Cryptographic Erase, a feature that allows you to instantly make data unreadable by wiping the encryption key when a storage medium is reused or disposed of. It also saves time and costs required for data erasure processes.

## Features of Enterprise SSDs

- SSDs provide faster random access performance than HDDs. Therefore, when used as cache and storage, SSDs help improve the overall performance of servers and storage systems. SSDs are also a suitable solution to improve the performance of industrial equipment.
- Uses NAND flash memory specifically designed for enterprise applications to provide enhanced reliability.
- Supports the Power Loss Protection feature to safeguard data against temporary power interruption.
- Offers excellent Power Consumption Efficiency\*<sup>11</sup> (IOPS/W), reducing the total cost of ownership (TCO) for an overall system.

## SSD/HDD Characteristics

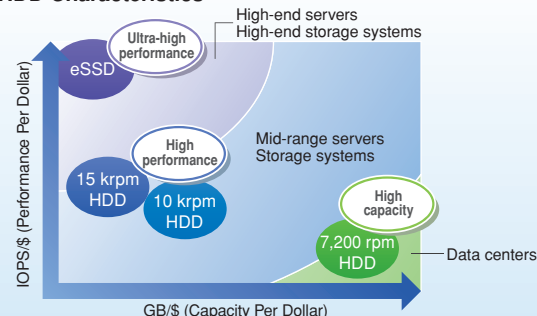

	Model	Capacity* <sup>4</sup>	NAND Type	Interface	Sector Size (bytes)	Data Transfer Rate (sustained)(MB/s)		IOPS* <sup>12</sup> (sustained) Read / Write (4-kB Random)* <sup>5</sup>		Average Power Consumption (W Typ.)	Power Loss Protection	Ambient Temp. (°C)	Encrypt. (Optional)	Dimensions Height / Width / Length (mm)	Weight (g Max)	Supply Voltag (V)						
						Seq.Read	Seq.Write	Read	Write													
 Enterprise SSDs	MK4001GRZB	400 GB	SLC	SAS 6 Gbps	512	500	250	90,000	16,000	6.5	●	0-55		15.00 69.85 100.45	160	5 12						
	MK2001GRZB	200 GB			520																	
	MK1001GRZB	100 GB			528																	
	PX02SMB160	1.6 TB	eMLC	SAS 6 Gbps / 12 Gbps	512	900	400	120,000	25,000	9.0	●	0-55	●	7.00 69.85 100.00	170	5 12						
	PX02SMF080	800 GB			520					8.5												
	PX02SMF040	400 GB			4096																	
	PX02SMF020	200 GB			4160 4224																	


## Benefits of a Tiered Storage System >>

Tiered storage combines high-speed enterprise SSDs and low-cost, high-capacity HDDs, as opposed to conventional storage that consists of only enterprise HDDs. Compared to the conventional storage system, a tiered storage system improves access performance by approx. 7.5 times, eliminating I/O bottlenecks. Compared with the conventional storage system, the tiered storage system cuts the number of drives by approx. two-thirds and cuts power consumption by approx. 55%. The tiered storage system greatly reduces the total cost of ownership (TCO) and contributes to a reduction in environmental impact. (Estimates by Toshiba)

Toshiba offers a suitable portfolio of enterprise SSDs and HDDs needed to build tiered storage systems. You can select storage products that best fit your needs.

### >> Tiered Storage System

According to an access model of a typical enterprise storage system, 80% of all accesses are made to 20% of data. By storing the 20% most frequently accessed data in eSSDs with fast access times and high-speed HDDs, you can dramatically reduce the overall drive count and power consumption while increasing data throughput.

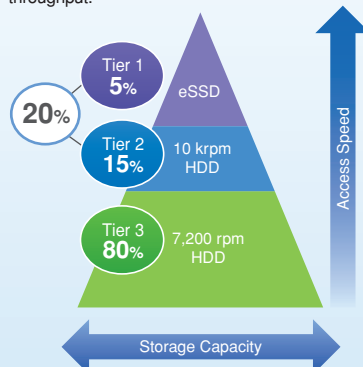

### >> Benefits of a Tiered Storage System Using eSSDs (Example Estimated for a 300-TB Storage System)

#### Tiered Storage System Using eSSDs


##### Storage Organization

Drive	Capacity	#Units	Capacity Ratio
eSSD	1.6 TB	10	5%
10 krpm HDD	900 GB	50	15%
7,200 rpm HDD	4 TB	60	80%

#### Conventional Non-Tiered HDD Storage System

##### Storage Organization

Drive	Capacity	#Units	Capacity Ratio
10 krpm HDD	900 GB	334	100%

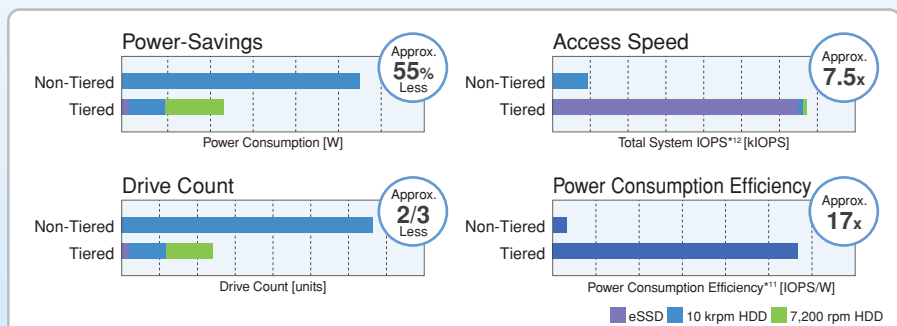

\*<sup>11</sup>: Power Consumption Efficiency (IOPS/W): IOPS per watt consumed

\*<sup>12</sup>: IOPS: Input/Output Per Second (or the number of I/O operations per second)



## ● SSD/HDD

**Toshiba America  
Electronic Components, Inc.**

- Irvine, Headquarters  
Tel: (949)623-2900 Fax: (949)474-1330
- Austin  
Tel: (512)342-9041 Fax: (512)342-9414
- Buffalo Grove (Chicago)  
Tel: (847)484-2400 Fax: (847)541-7287
- Duluth/Atlanta  
Tel: (770)931-3363 Fax: (770)931-7602
- El Paso  
Tel: (915)771-8156
- Houston  
Tel: (281)655-2100 Fax: (281)655-2120
- Marlborough  
Tel: (508)481-0034 Fax: (508)481-8828
- Parsippany  
Tel: (973)541-4715 Fax: (973)541-4716
- San Jose  
Tel: (408)324-5800 Fax: (408)324-5900
- Wixom (Detroit)  
Tel: (248)347-2607 Fax: (248)347-2602

**Toshiba Electronics do Brasil Ltda.**  
Tel: (011)2936-6681 Fax: (011)2936-6675**Toshiba India Private Ltd.**

- New Deli Office  
Tel: (0124)499-6600 Fax: (0124)499-6611
- Bangalore Office  
Tel: (080)251-90800 Fax: (080)490-91945

**Toshiba Electronics Europe GmbH**

- Düsseldorf Head Office  
Tel: (0211)5296-0 Fax: (0211)5296-400
- France Branch  
Tel: (1)47282181
- Italy Branch  
Tel: (039)68701 Fax: (039)6870205
- Munich Office  
Tel: (089)20302030 Fax: (089)203020310
- Spain Branch  
Tel: (91)660-6798 Fax: (91)660-6799
- Sweden Branch  
Tel: (08)704-0900 Fax: (08)80-8459
- U.K. Branch  
Tel: (1932)841600

**Toshiba Vietnam Consumer Products Co.,Ltd.**  
Tel: (043)776-5950 Fax: (043)776-5956**Toshiba Electronics Asia (Singapore) Pte. Ltd.**  
Tel: (6278)5252 Fax: (6271)5155**Toshiba Electronics Service (Thailand) Co., Ltd.**  
Tel: (02)501-1634 Fax: (02)501-1638**Toshiba Electronics Trading (Malaysia)Sdn. Bhd.**

- Kuala Lumpur Head Office  
Tel: (03)5631-6311 Fax: (03)5631-6307
- Penang Office  
Tel: (04)226-8523 Fax: (04)226-8515

**Toshiba Electronics (Shanghai) Co., Ltd.**

- Shanghai Head Office  
Tel: (021)6139-3888 Fax: (021)6190-8288
  - Beijing Branch  
Tel: (010)6590-8796 Fax: (010)6590-8791
  - Chengdu Branch  
Tel: (028)8675-1773 Fax: (028)8675-1065
  - Hangzhou Office  
Tel: (0571)8717-5004 Fax: (0571)8717-5013
  - Huangpu Branch  
Tel: (021)6135-3977 Fax: (021)6135-3955
  - Nanjing Office  
Tel: (025)8689-0070 Fax: (025)8689-0125
  - Qingdao Branch  
Tel: (532)8579-3328 Fax: (532)8579-3329
  - Shenzhen Branch  
Tel: (0755)2399-6897 Fax: (0755)2399-5573
  - Dalian Branch  
Tel: (0411)8368-6882 Fax: (0411)8369-0822
  - Chongqing Office  
Tel: 023-62946355 Fax: 023-62946356
  - Xiamen Branch  
Tel: (0592)226-1398 Fax: (0592)226-1399
- Toshiba Electronics Asia, Ltd.**
- 
- Tel: 2375-6111 Fax: 2375-0969
- 
- Toshiba Electronics Korea Corporation**
- 
- Tel: (02)3484-4334 Fax: (02)3484-4302
- 
- Toshiba Digital Media Network  
Taiwan Corporation**
- 
- Tel: (02)2513-5999 Fax: (02)2513-5977

- ▶ Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- ▶ This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- ▶ Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- ▶ **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative.
- ▶ Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- ▶ Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- ▶ The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- ▶ **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- ▶ Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- ▶ Product may include products subject to foreign exchange and foreign trade control laws.
- ▶ Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

**TOSHIBA****TOSHIBA CORPORATION**

Semiconductor &amp; Storage Products Company

Website: <http://www.toshibastorage.com>