

# System:2 Mod Media™

## PLM Series Aboveground Systems

by Sta-Rite®




## Greatest capacity for least maintenance

Sta-Rite's System:2 Mod Media™ aboveground system is the ultra-capacity filter that is ideally suited for aboveground pools. The Mod Media design handles dirt loads up to 15 times greater than sand filters of equivalent size. Balanced flow tank hydraulics direct water through each side of the filter module for uniform dirt loading. That prevents clogging and captures more dirt between cleanings to minimize maintenance time.

You may go an entire season before you need to clean your PLM aboveground filter:


- You won't clean often, but it's easy when you do — just rinse in place with a garden hose.
- Quiet, highly efficient pump options keep operating costs low.
- Compact design fits easily in tight installations.

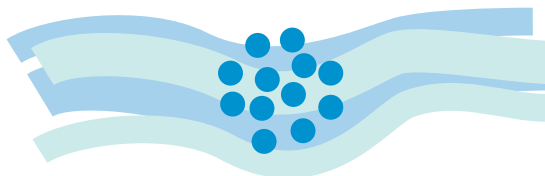

*The System:2 strips away particles as small as 20 microns (an average grain of beach sand is 100 to 2000 microns in diameter!).*

# System:2 Mod Media™

## PLM Series Aboveground Systems

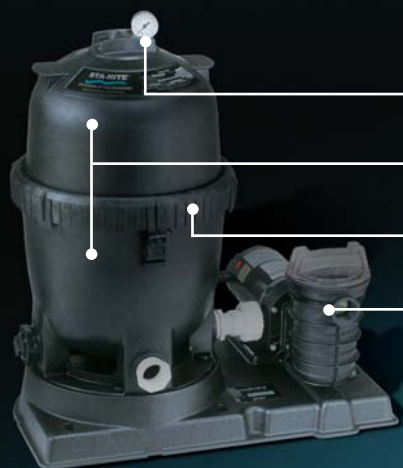

Top-mounted pressure gauge and information panels are positioned for easy reading.

Split tank design permits rinse-in-place cleaning — super simple to achieve thorough cleaning fast.

Posi-Ring® closure is safe, easy to secure properly every time, and lasts for years.

System available with Sta-Rite ABG or JWP Series aboveground pumps.



## Spray-and-go simplicity



The Mod Media™ system features a one-piece filter module that simply drops into the easily accessible tank. It's foolproof! When cleaning is necessary, just remove the lid (no tools are needed) and spray-rinse the module while it is still in place.\* It only takes minutes to clean thoroughly and get back into service fast.

### Convenience and versatility

The Mod Media's small diameter footprint is the perfect fit for new and retrofit installations. Interchangeable ports provide multiple plumbing options and the modular filter tank permits quick change of filter media. Contemporary styling and matte black finish appear attractive in any pool setting.

\*Modules used in conjunction with certain pool/spa sanitizers may require soaking in special cleaning solutions.

## Filter Performance

Model	Pump* (HP)	Filter Area (Sq. Ft.)	For Pools up to (Gal.) 8 Hr. Turnover
PLM100JWAE	1	100	28,800
PLM100JWAF	1 1/2	100	33,600
PLM150JWAE	1	150	28,800
PLM150JWAF	1 1/2	150	33,600

\*Available with ABG or JWP Series aboveground pumps.

**Operating Limits** — Maximum continual operating pressure is 50 PSI. For Pool/Spa (bather) applications, the maximum operating water temperature within the filter is 104°F (40°C).

One-year limited warranty. See warranty for details.

## Available from:



**Simply Smarter.**

[www.staritepool.com](http://www.staritepool.com)

Phone: 800-831-7133 Fax: 800-284-4151

pumps / filters / heaters / heat pumps / automation / lighting / cleaners / sanitizers / maintenance products