

Job: _____

Engineer: _____

Contractor: _____

Prepared By: _____ Date: _____

Model: _____ Indoor/Outdoor: _____ MBTUH Input: _____

Hi Delta[®] - Type P

Commercial Pool Heaters
Models 302B & 402B

Sealed Combustion Chamber

100% Factory Fire Tested

Efficiency: 85%

Minimum Non-condensing Inlet Temperature: 105°F

Thermal Shock Proof Heat Exchanger

Limited Twenty-year Thermal Shock Warranty

Limited Five-year Heat Exchanger Warranty

Diagnostic Center with Fault History


PolyTuf Powder Coated Cabinet

No Combustible Floor Shield Required

Fan-assisted

Non-ferrous Bypass

Patented Burner Security Blanket

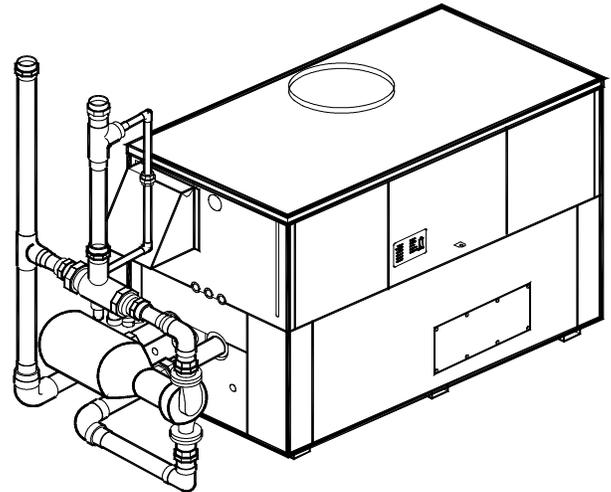

Heat Exchanger

- Bronze Headers
- ASME Inspected and Stamped
160 PSIG Working Pressure
- National Board Approved
- Cupro Nickel Finned Tubing
- ASME Steel Tube Sheet
- Silicone High Temp O-Rings
- 125 PSIG ASME Pressure Relief Valve
- Temperature and Pressure Gauge
- Water Connections
 - Left – Standard
 - Right – Option A-6
- Bronze Pump, 1/3 HP, 120V, 60Hz
- Non-Ferrous Pool Bypass Assembly with Automatic Control

Controls

- 120V, 60Hz, 1Ø Power Supply
- 120/24V 60Hz Transformer
- 100% Shut-off/Lockout
- Hot Surface Ignition
- Remote Flame Sensor
- High Limit Control, Auto Reset
- On/Off Power Switch
- Manual Shut-off, Front-mounted
- Flow Switch
- Blocked Vent Pressure Switch
- Combustion Air Proving Switch
- Economaster Pump Time Delay
- Poolstat

Gas Train

- Gas Pressure Regulator
- Safety Shut-off Valve
- Firing Control Valve
- On/Off Firing
- Fuel
 - Natural Gas
 - Propane Gas
- Design Certified ANSI Z21.56/
CSA 4.7

Burner

- Ultra-low NOx:
Less Than 30 PPM

Construction

- Indoor/Outdoor Construction
- Enclosed Front Controls

Venting


- Vent Location
 - Top – Standard
 - Rear – Option D-14
- Vent Termination Cap
 - Outdoor – Option D-11
 - Indoor, Horizontal –
Option D-15
 - Indoor, Vertical (by others)
- Combustion Air
 - In-Line Filter Kit (TruSeal
only) – Option D-17
 - Air Intake Elbow –
Option D-16

Options

- C-6 Ignition Module, Manual Reset
- D-21 TruSeal™ Direct Vent
- F-10 Low Water Cut-Off, Remote
Probe
- I-1 High Limit Control, Auto Reset
- S-1 Low Gas Pressure Switch,
Manual
- S-2 High Gas Pressure Switch,
Manual
- X-1 SureRack™ Kit
- X-2 SureRack Add-on
- _____

Regulatory Agency Requirements


- G-1 CSD-1



Raypak[®]
A Rheem Company

Hi Delta – Type P Models 302B & 402B

Model _____

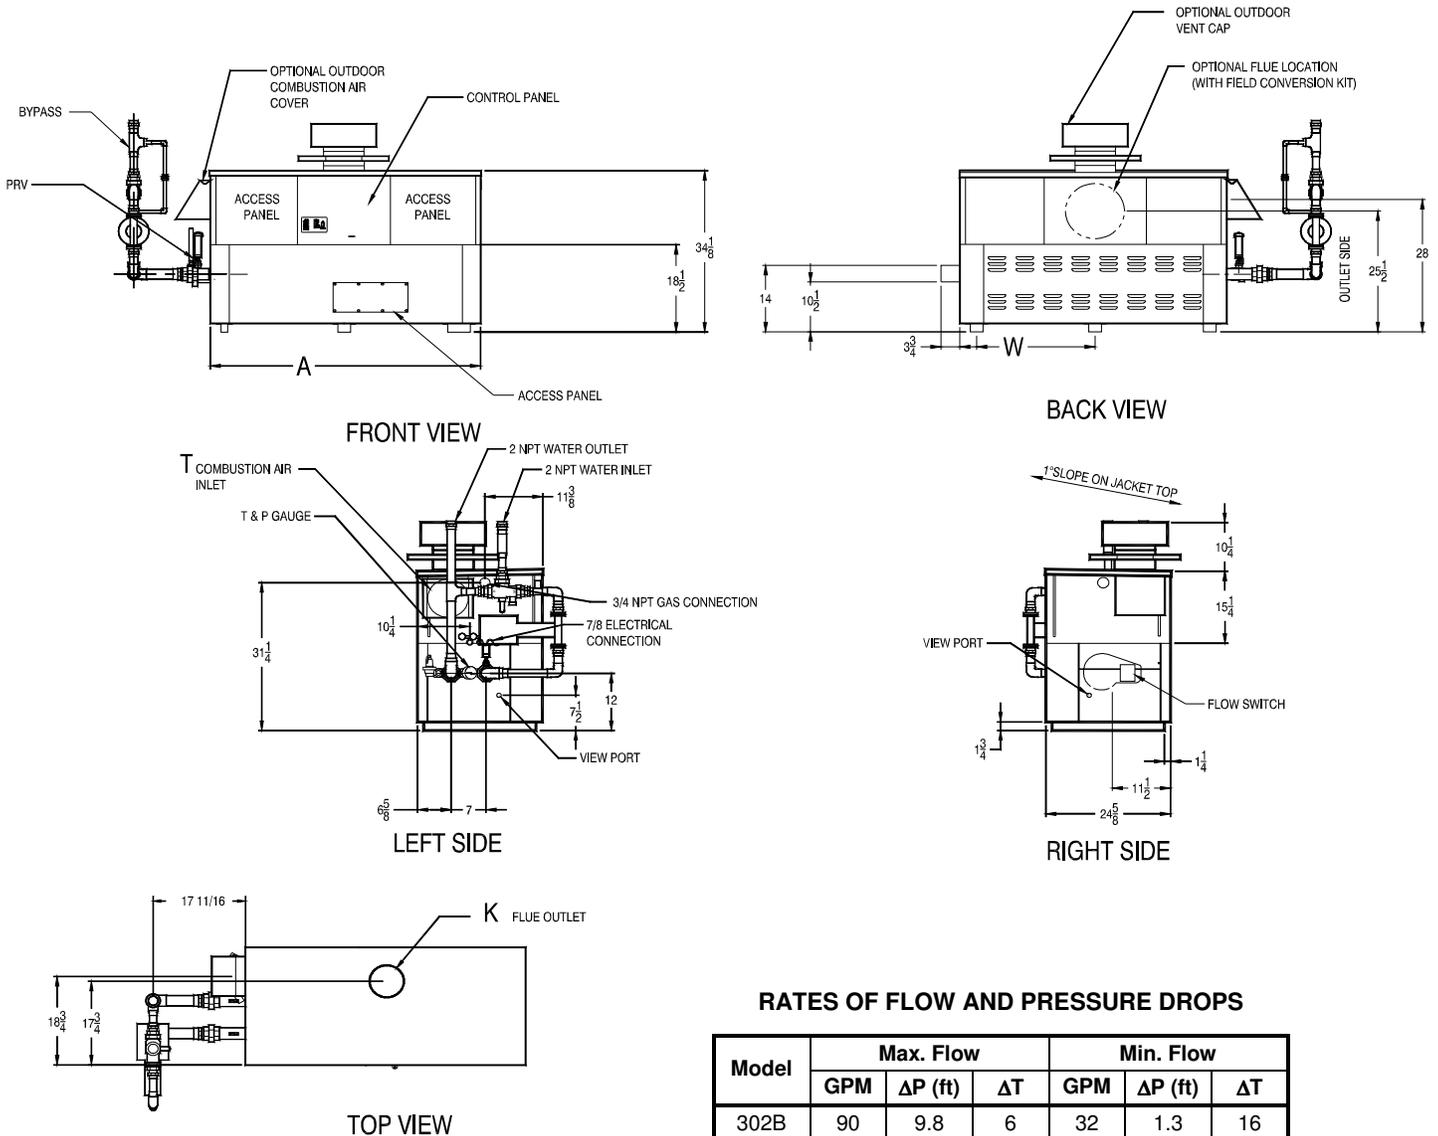

RATES OF FLOW AND PRESSURE DROPS

Model	Max. Flow			Min. Flow		
	GPM	ΔP (ft)	ΔT	GPM	ΔP (ft)	ΔT
302B	90	9.8	6	32	1.3	16
402B	90	10.0	8	32	1.35	21

Model	MBTUH		A Width	K	T	W	Amp Draw (w/ Pump)	Operating Weight (Lbs.)
	Input	Output						
302B	300	255	36	5	6	18	21.1	425
402B	399	339	43	6	6	18-1/2	21.1	500

NOTES: Dimensions are in inches.
Ratings shown are for elevations up to 5,000 feet and for natural or propane gas.
For installation at elevations over 5,000 feet, please contact manufacturer.