

Extreme work calls for extreme tools, and the FinishPro 42XP is this tool! Replacing the work horse FinishPro 41XP, the FinishPro 42XP has even greater durability and better ergonomics. All backed by SENCO's NEW 5-Year limited warranty.



Specifications:

Item#: 4G0001N Sequential Actuation (Restrictive)
 Tool Weight: 4.0 lbs (1.8 kg)
 Height: 11-5/8" (249 mm)
 Length: 13" (330 mm)
 Nail Capacity: 100
 Reg. Operating Pressure: 70-120 psig
 Mode of Operation: Tool is available with either contact actuation or sequential trigger mechanism
 Hose Fitting: 1/4" NPT

Fastener Specifications:


Gauge: 15
 Fastener Range: 1-1/4" – 2-1/2"
 Finish: Bright Basic, Galvanized & Stainless

Applications:

Baseboards, cabinets, case goods, caskets, chair rails, decorative trim, door & window casing, sash & millwork, exterior trim, finish applications/trim, furniture and paneling.

Features and Benefits:

- Thumb wheel adjustable depth-of-drive
- Comfort grip
- NeverLube® technology – no lubrication required
- EZ-Clear™ latch – to clear jams fast
- Two No-Mar pads with onboard storage to protect work materials
- Magnesium housing - lightweight and comfortable to use all day
- 360° adjustable exhaust
- Construction ruler – for quick measurements
- Advanced belt hook – convenient storage

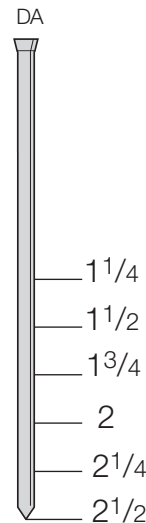



Choose the right trigger system for your specific needs!

Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how Senco will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: www.senco.com