

Heavy Duty wide crown stapler capable of handling a variety of applications. Lightweight and well-balanced, minimizing operator fatigue.



### Applications:

Primarily for lathing. Also capable of handling a variety of other applications including foam insulation board, corrugated carton to skid, furniture/cabinet frames, butt-joints and asphalt roof shingles.

### Features and Benefits:


- Lightweight 4.9 pounds
- High load capacity (150 staples)
- Designed for fast loading, consistent flush driving
- Comes in rugged tool case
- Adjustable depth of drive safety
- EZ Clear virtually eliminates downtime caused by fastener jams.
- Drives  $\frac{7}{8}$ " - 2", 16 ga 1" wide crown staples
- One year warranty

### Tool Specifications:

Item #: 2T0001N: Contact Actuation (Dual Action)  
2T0002N: Sequential Actuation (Restrictive)  
Weight: 4.9 lbs. ( 2.68 kg)  
Height: 9  $\frac{1}{4}$ " (2.23 mm)  
Length: 14  $\frac{3}{8}$ " (365.125 mm)  
Staple Capacity: 150  
Operating Pressure: 70-120 psig (4.8-8.3 bar)  
Mode of Operation: Tool is available with either contact actuation or sequential trigger mechanism.  
Hose Fitting:  $\frac{1}{4}$ " NPT

### Fastener Specifications:

Staples: Drives  $\frac{7}{8}$ " - 2", 16 ga 1" wide crown staples

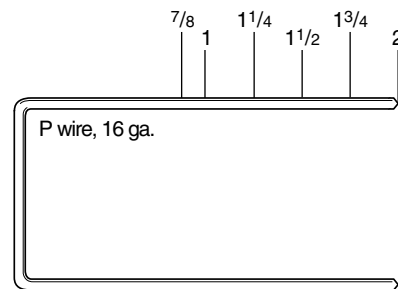



**Powerful and Fast**  
Weighs just 4.9 lbs.

**360° Adjustable Exhaust**

**Comfort Grip**  
Resilient grip reduces vibration fatigue

**EZ-Clear Latch**  
Provides quick and easy clearing of fasteners

**Adjustable Depth-of-Drive Safety**  
Drives staples to a consistent and controllable depth



For additional information on how Senco Power Fastening Systems will save you time, reduce costs, and increase quality, call our toll-free Action Line: 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor. Visit our web site at: [www.senco.com](http://www.senco.com)

#### **SENCO's Trigger Systems**

**Sequential Actuation Trigger** (also known as restrictive trigger or trigger fire) operates by following a sequence - depress the safety element on the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended for most applications.

**Contact Actuation Trigger** (also known as dual action, bounce or bottom fire) operates by keeping the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element on the nose of the tool against the work surface where the fastener is to be driven. The trigger can be pulled either before or after depressing the safety element. This trigger is recommended for use by trained professionals only in high production or volume applications.

Both trigger systems are available, FREE OF CHARGE, for most Senco tools. Choose the right trigger system for your specific needs!

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. Also, log on to [www.senco.com](http://www.senco.com) or call 1-800-543-4596 for more information on Senco's trigger systems.