

**ACCORD®** 

#### **Features**

- Compression molded from Sterling's exclusive solid Vikrell<sub>®</sub> material
- Modular 4-piece design
- Pivot "snap together" installation
- Caulkless installation
- Convenient shelves provide generous storage
- Durable high gloss finish
- Lightly pebbled bottom surface for sure footing
- 10-year consumer/3-year commercial limited warranty
- · Wall surround allows for attachment of grab bars
- 60-1/8" (152.7 cm) x 37-1/4" (94.6 cm) x 77" (195.6 cm) rough-in dimensions include nailing flange
- 60" (152.4 cm) x 36" (91.4 cm) x 71-1/4" (181 cm) complete unit finished dimensions


## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- CSA B45

# 60" (152.4 cm) RECEPTOR AND SURROUND W/BACKER BOARDS 72270106





### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Complete Unit Description	Colors/Finishes	
72270106	60" (152.4 cm) shower receptor and wall surround with backer boards	<b>0</b>	☐ Other
Model	Wall Component Description	Colors/Finishes	
72272106	60" (152.4 cm) Backwall	□ 0	☐ Other
72271100	60" (152.4 cm) Receptor	□ 0	☐ Other
72245106	Endwall set with backer boards	<b>0</b>	☐ Other

## **ACCORD®**

## **Technical Information**

Model	door maximum width	door maximum height
72270106	56-5/8" (143.8 cm)	72" (182.9 cm)

### **Installation Notes**

Install this product according to the installation guide.


Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for roofing nail

Receptor cannot be installed without the wall surround.

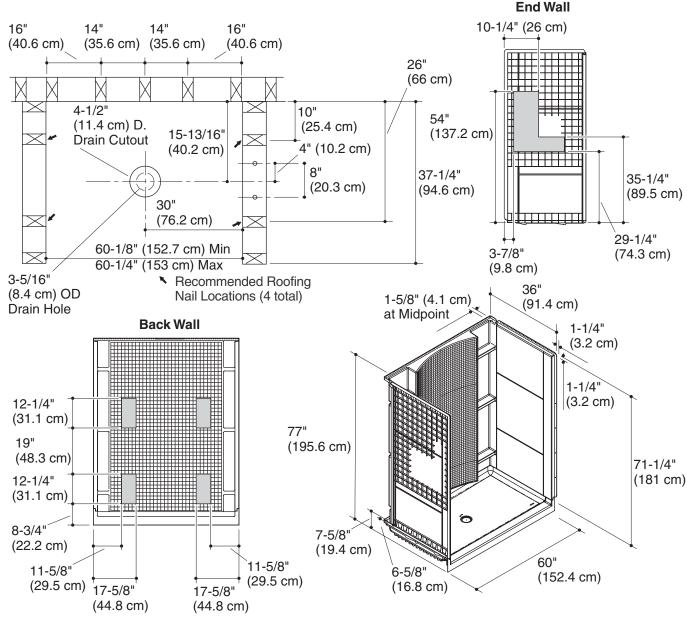

**Product Diagram** 

