

A KOHLER COMPANY


#### Features

- Heavy-duty, anodized aluminum-framed sliding glass doors
- Full length handle for easy operation
- Aluminum components extruded from alloy 6063-T5
- Tempered glass ensures maximum safety and durability
- Threshold directs water back into the shower and minimizes soap or lint build up
- Nylon pivot bushings provide silent operation
- Installs left- or right-handed
- Adjustable wall jamb allows for out-of-plumb conditions up to 1" (2.5 cm) per side
- A width adjustment of 6" (15.2 cm) per model reduces inventory requirements
- Full length magnet provides secure door closure
- Stainless steel hardware prevents rusting or corrosion

### **Codes/Standards Applicable**

Specified model meets or exceeds the following:

• ANSI Z97.1 (tempered glass)



**DESIGNER PIVOT SHOWER DOORS** 

# **Colors/Finishes**

- S: Silver
- PB: Vibrant<sub>®</sub> Polished Brass
- G: Brushed Chrome

# **Specified Model**


Model	Application	Glass Texture	Pattern	Frame C	olors/Fini	shes*		
1500D-42S	Shower	Pebbled	None	□S				
1500D-48*	Shower	Pebbled	None	□S	🗆 PB	G		
1501D-48*	Shower	Pebbled	Floral Fancies	□S	D PB			
* Note: Add appropriate finish color/finish code to the end of the unit model # when ordering.								

#### SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

Model	A Width (Max / Min)	B (Height)	C (Walk Through Max / Min)
1500D-42	42" (106.7 cm) / 36" (91.4 cm)	65-1/2" (166.4 cm)	24-13/16" (63 cm) / 19-1/2" (49.5 cm)
1500D-48	48" (121.9 cm) / 42" (106.7 cm)	65-1/2" (166.4 cm)	24-13/16" (63 cm) / 19-1/2" (49.5 cm)
1501D-48	48" (121.9 cm) / 42" (106.7 cm)	65-1/2" (166.4 cm)	24-13/16" (63 cm) / 19-1/2" (49.5 cm)

1-1/4" (3.2 cm)

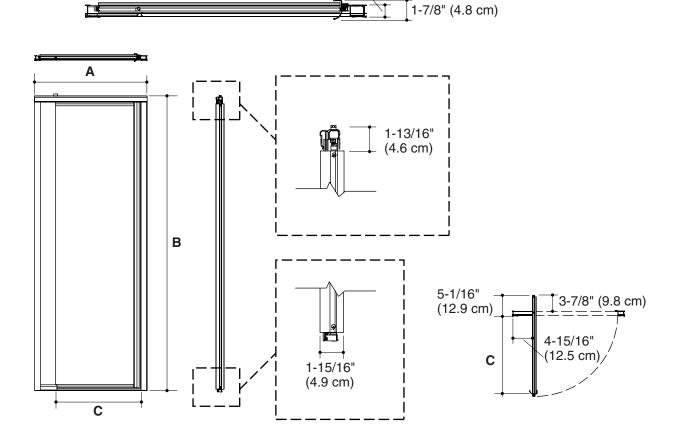

**Product Diagram** 

