



Installation Manual

EXIT BUTTON

AST-EXIT

AST

VERSION 1.1



AAT Holding sp. z o.o.

ul. Puławska 431, 02-801 Warszawa, tel. 022 546 05 46, fax 022 546 05 01

www.aat.pl

Exit button - AST EXIT

The AST EXIT button was designed for use in access control systems. Due to the small size is designed for flush mounting on narrow profiles. It has a backlit key and two pairs of contacts NO / NC. It has a modern, attractive appearance and easy to install. The robust mechanical design ensures reliable operation.

FEATURES

- For mounting on narrow profiles
- Terminals NO / NC
- Contact rating: 4A 24VAC, 250VAC 2A
- Illuminated button press
- Lamp backlighting: 60V/1.2W max
- CE Certificate
- Dimensions: 102x 35 x 22 mm




Illuminated Narrow Style Push Button Switch

Single pole, double throw, double break illuminated switch with colour lens for momentary or maintained switches.

LED (optional)


Specifications:

Switching Rating - 5A 250 VAC
- 6A 24VDC

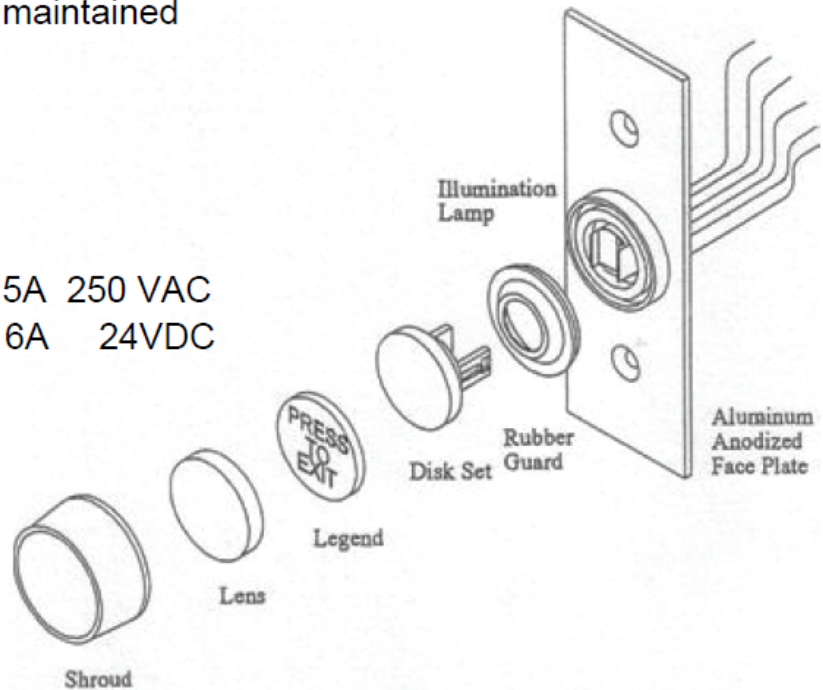

Technical Information

N/C- Normally Closed:
Connection between blue & red
wired for normally closed.
N/O- Normally Open:
Connection between black & white
wired for normally open.

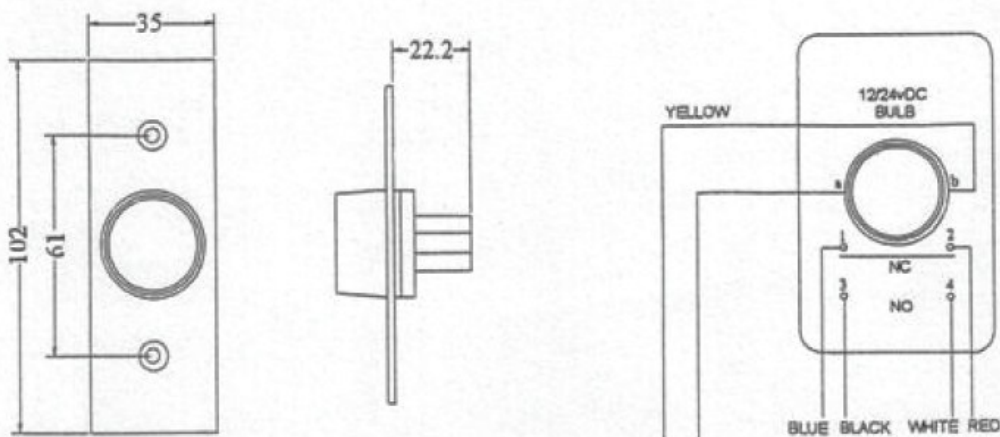

AAT Holding sp. z o.o.

ul. Puławska 431, 02-801 Warszawa
tel. 22 546 05 46, faks 22 546 05 01
e-mail: aat.warszawa@aat.pl, www.aat.pl



Warszawa